



Design by GROK Team

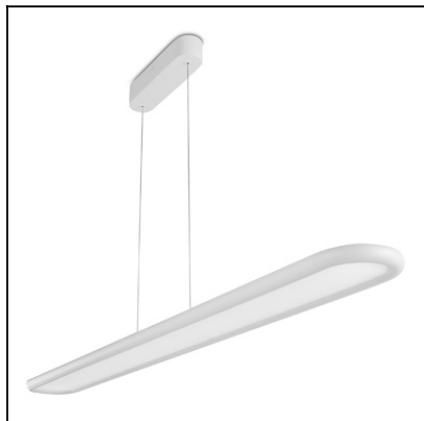

The photograph may not match the reference exactly. Please read the product description to identify the finish.

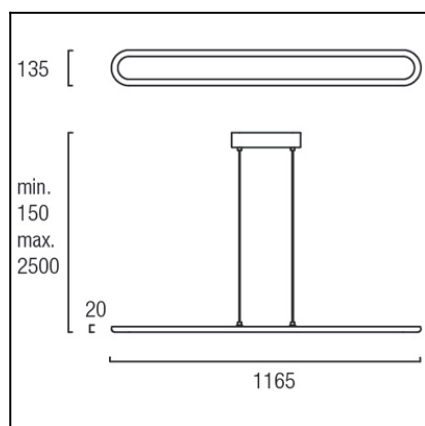

TECHNICAL CHARACTERISTICS

Type:	Pendant
IP Protection degrees:	IP20
Bulb:	740 x LED Refond. Warm White - 3000K
Power (W):	43
Total power consumption (W):	60.9
Luminous efficacy (Lm/W):	111
CRI:	80
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	1
Net Weight (Kg):	4.49
EAN:	0,00



MATERIALS / FINISHES

Structure material: Aluminium
Steel

Structure finish: Matt white

Diffuser material: Polystyrene

Diffuser finish: Opal

GEAR


Multi-voltage electronic gear included (110-240 V / 50-60 Hz)
Dimming protocol: 1..10V

Download photometric file .ldt /.ies

Luminaire			Measurem.			Lamp		
Code	00-0826-BW-M1		Code	00-0779-BW-M1		Code	00-0779-BW-M1	
Name	Colgante led GROK 43W Dimmable		Name	Colgante led GROK 43W warm		Number	1	
Line	- LEDS C4 LEDS		Date	08-03-2013		Position	Universal	
Efficiency			100.00%	Coordinate system		CG	Total Flux	2429.79 lm
Maximum value			854.57 cd	Position		C=0.00 G=0.00	Double Symmetrical	
Rectangular Luminaire			Length	1160 mm	Width	135 mm	Height	21 mm
Rectangular Luminous Area			Length	1115 mm	Width	85 mm	Height	0 mm
Horizontal Luminous Area			0.094775 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°			0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°			0.000000 m2		Glare area at 76°		0.022928 m2	
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		90	
Measurement Distance			6.44		Measurement Flux		2429.79 lm	
Operator			Asselum T2		Source voltage		230.00 V	
Temperature			21.00 °C		Source current		PRC	
Humidity			52.00 %		Photocell			
Notes								

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
- LEDS C4 LEDS	00-0779-BW-M1	Lámpara led blanco cálido 43W	2429.79	43.00	1	
C.I.E.	47 79 96 100 100	D DIN 5040				
F UTE	1.00 E	B NBN				
		A30				
		BZ 5 / 2 / BZ 4				


1160mm x 135mm

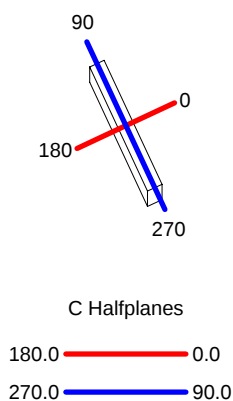


ULOR 0.00 %


DLOR 100.00 %

RN 0.00 %

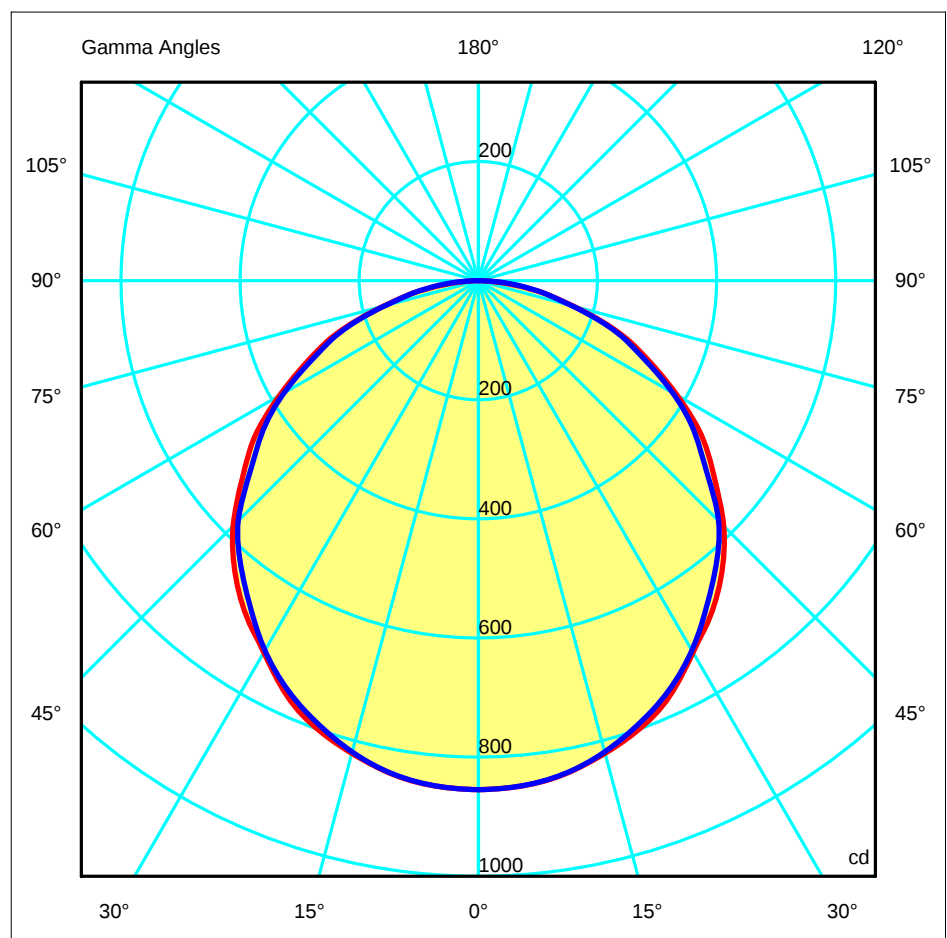


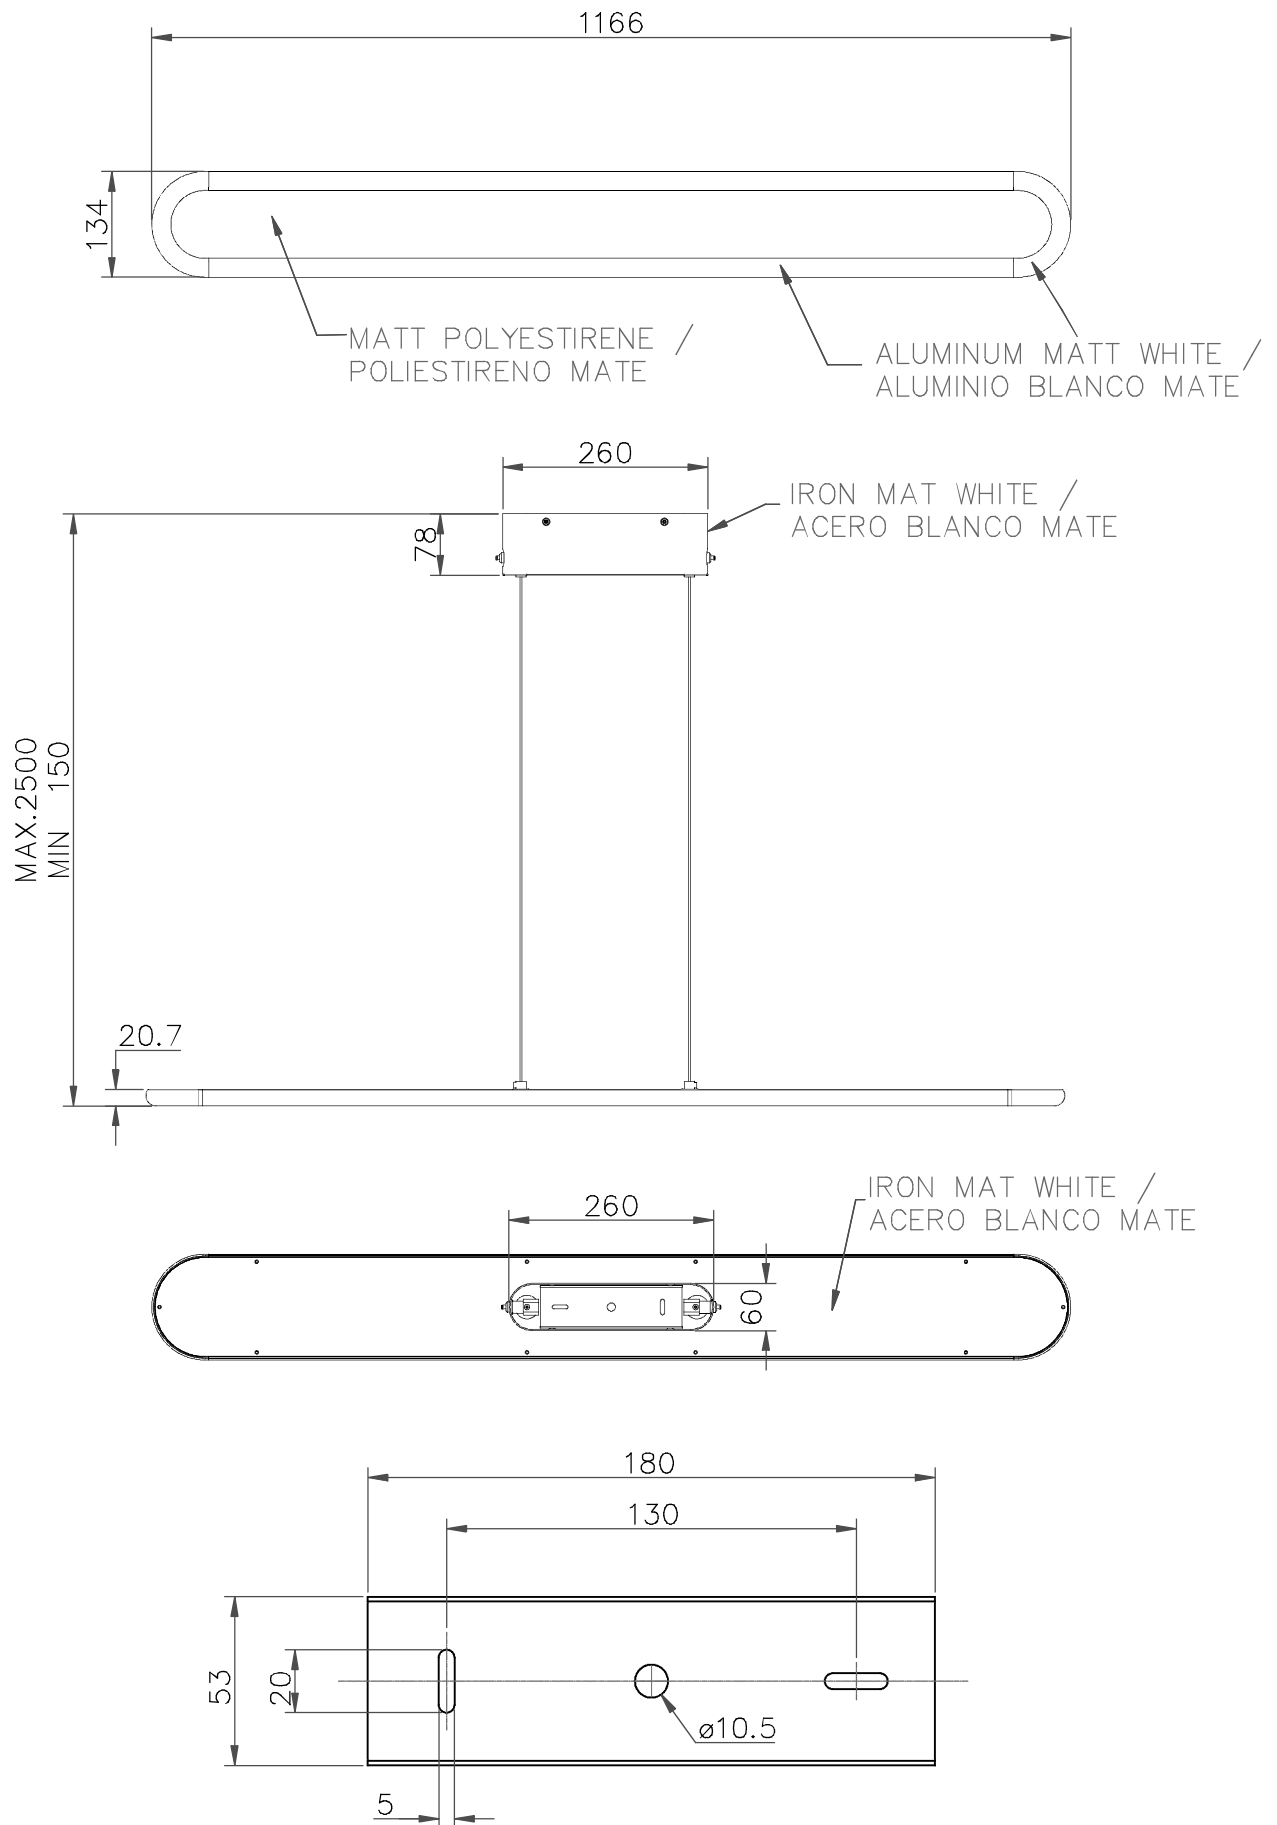


1

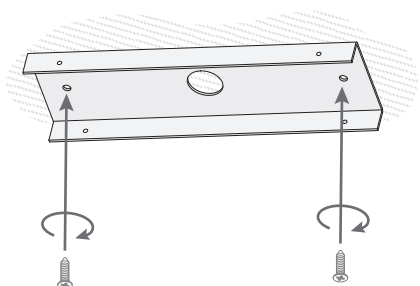


2

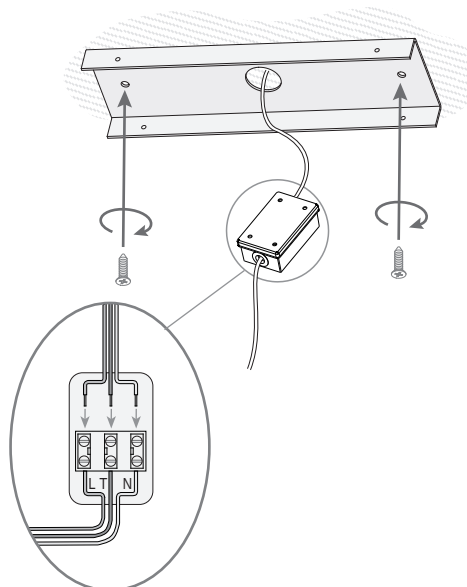


3

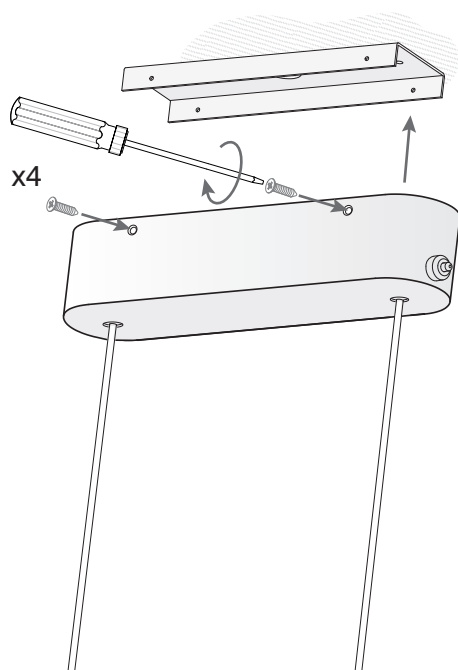


4

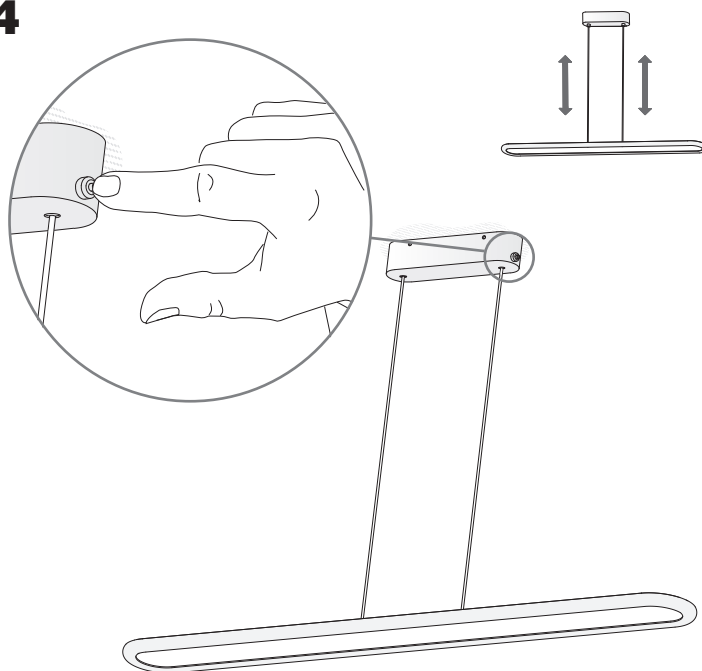


5

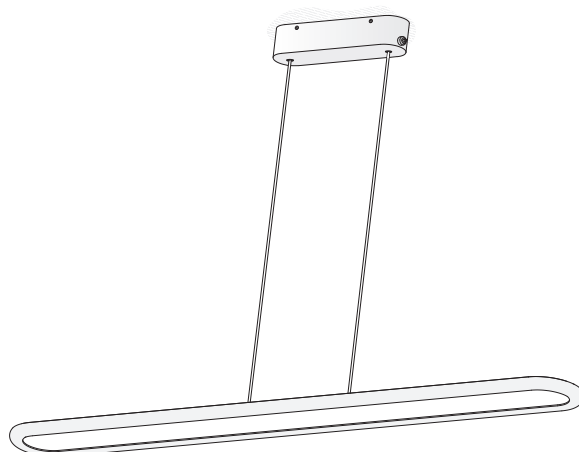

1

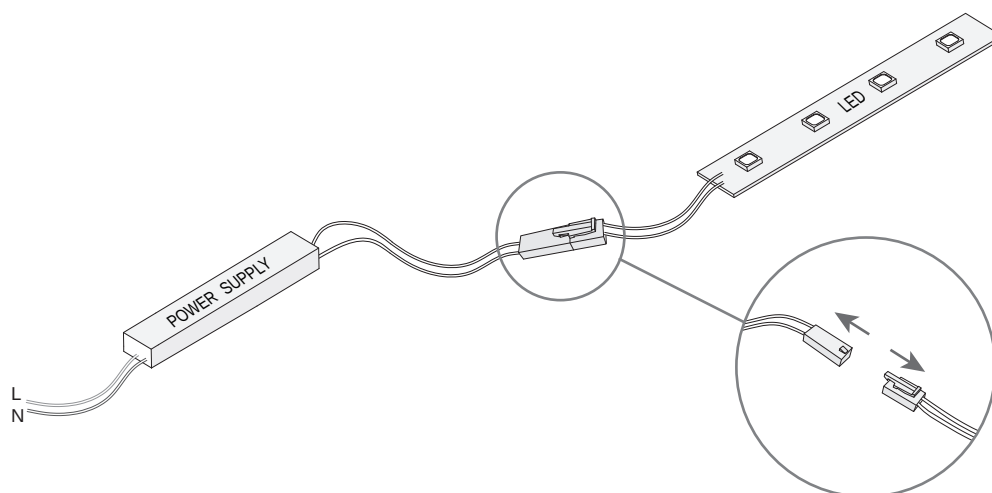

2

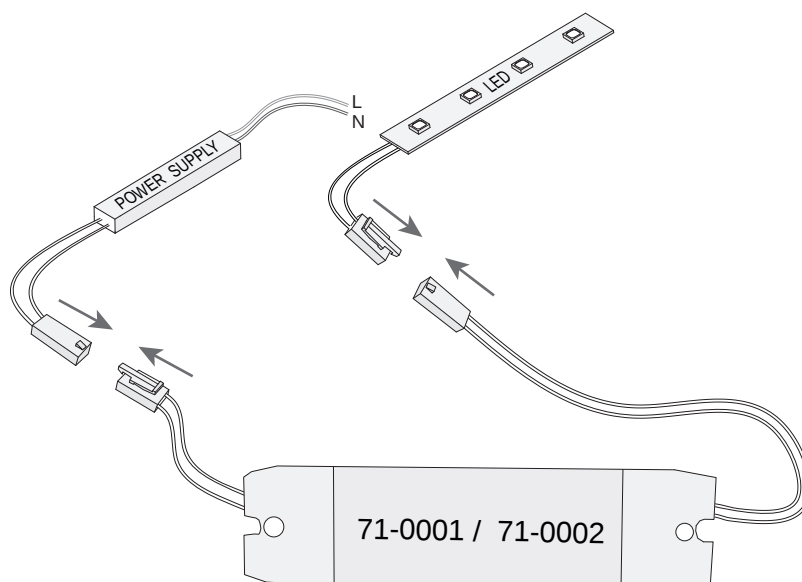

3

