


Design by Gemma Bernal



The photograph may not match the reference exactly. Please read the product description to identify the finish.

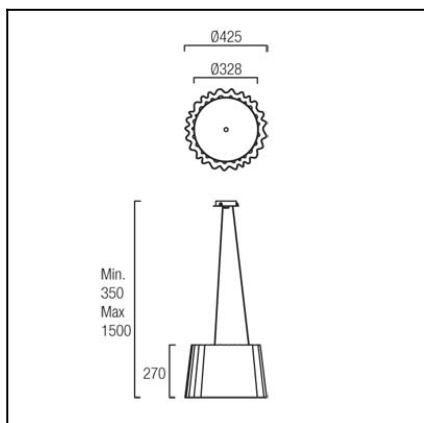

TECHNICAL CHARACTERISTICS

Type:	Pendant
IP Protection degrees:	IP20
Lampholder:	1 x 2GX13
Power (W):	2GX13 55W
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	1
Net Weight (Kg):	3.67
EAN:	8435111083208



MATERIALS / FINISHES

Structure material: Steel
Structure finish: Chrome


Diffuser material: Methacrylate
Diffuser finish: Transparent

[Download photometric file .ldt /.ies](#)

Luminaria		Ensayo		Lámpara	
Código	00-4413-21-M2	Código	00-4413-21-M2	Código	FC 55 W/830
Nombre	Colgante 55W FC difusor opal	Nombre	Colgante 55W FC difusor opal	Número	1
Familia	- LEDS-C4	Fecha	08-09-2011	Posición	Universal
Rendimiento	27.54%	Sist. de Coorden.	C-G	Flujo Total	4200.00 lm
Valor Máximo	455.11 cd	Posición	C=45.00 G=10.00	Bisimétrico	
Luminaria Redonda	Diam.	430 mm	Altura	270 mm	
Área Luminosa Redonda	Diam.	330 mm	Altura	10 mm	
Área Luminosa Horizontal	0.085530 m2		Área Emisión sobre Pl. 180°	0.003300 m2	
Área Emisión sobre Pl. 0°	0.003300 m2		Área Emisión sobre Pl. 270°	0.003300 m2	
Área Emisión sobre Pl. 90°	0.003300 m2		Área de deslumbramiento a 76°	0.023894 m2	
Tipo de Simetría	Bisimétrico	Máximo Ángulo Gamma	90		
Distancia de Ensayo	6.44	Flujo de Ensayo	4200.00 lm		
Operador	Asselum T2	Tensión de alimentación	230.00 V		
Temperatura	24.00 °C	Corriente de alimentación			
Humedad	50.00 %	Fotocélula	PRC		
Notas					

Lámparas de la Luminaria						
Familia	Código	Nombre	Flujo/lm	Pot.W	Cant.	
OSRAM 2006 FD,FC	FC 55 W/830	FC@ 55W/830 2GX13	4200.00	55.00	1	
C.I.E.	48 78 94 100 28	D DIN 5040				
F UTE	0.28 E	B NBN				
		A30				
		BZ 4 / 1.5 / BZ 5				


Diam=430mm




Semiplanos C


180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 27.54 %
RN 0.00 %

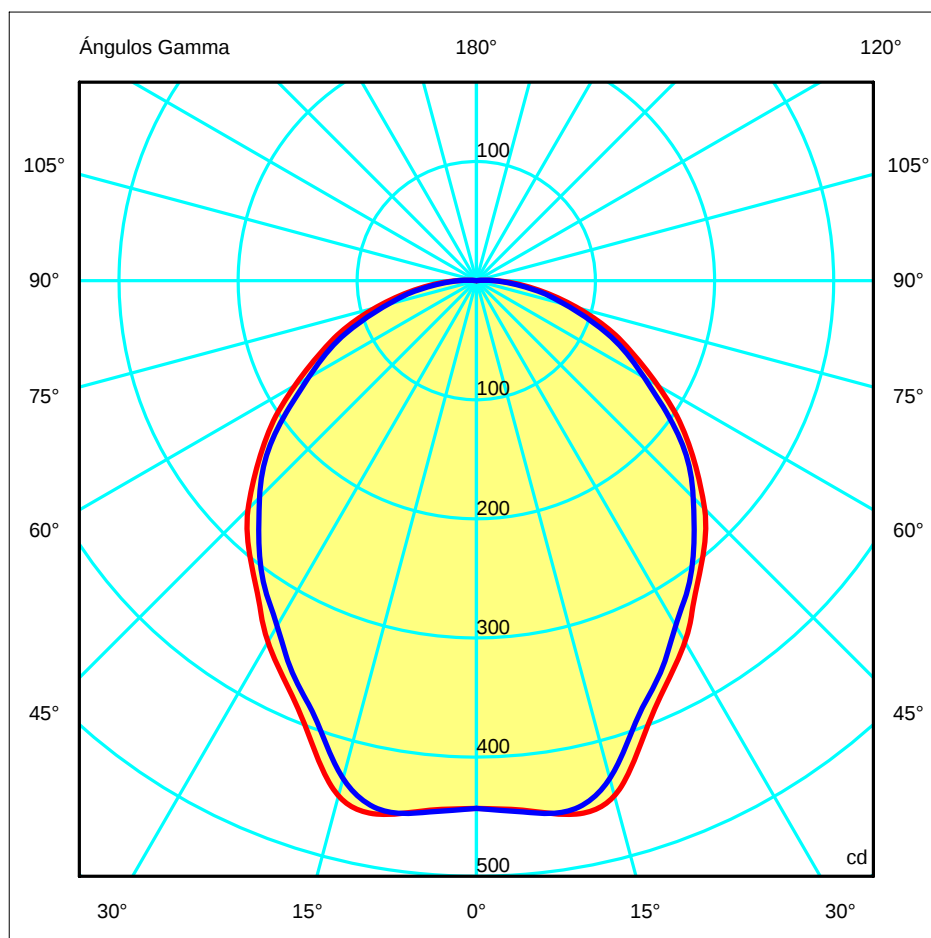


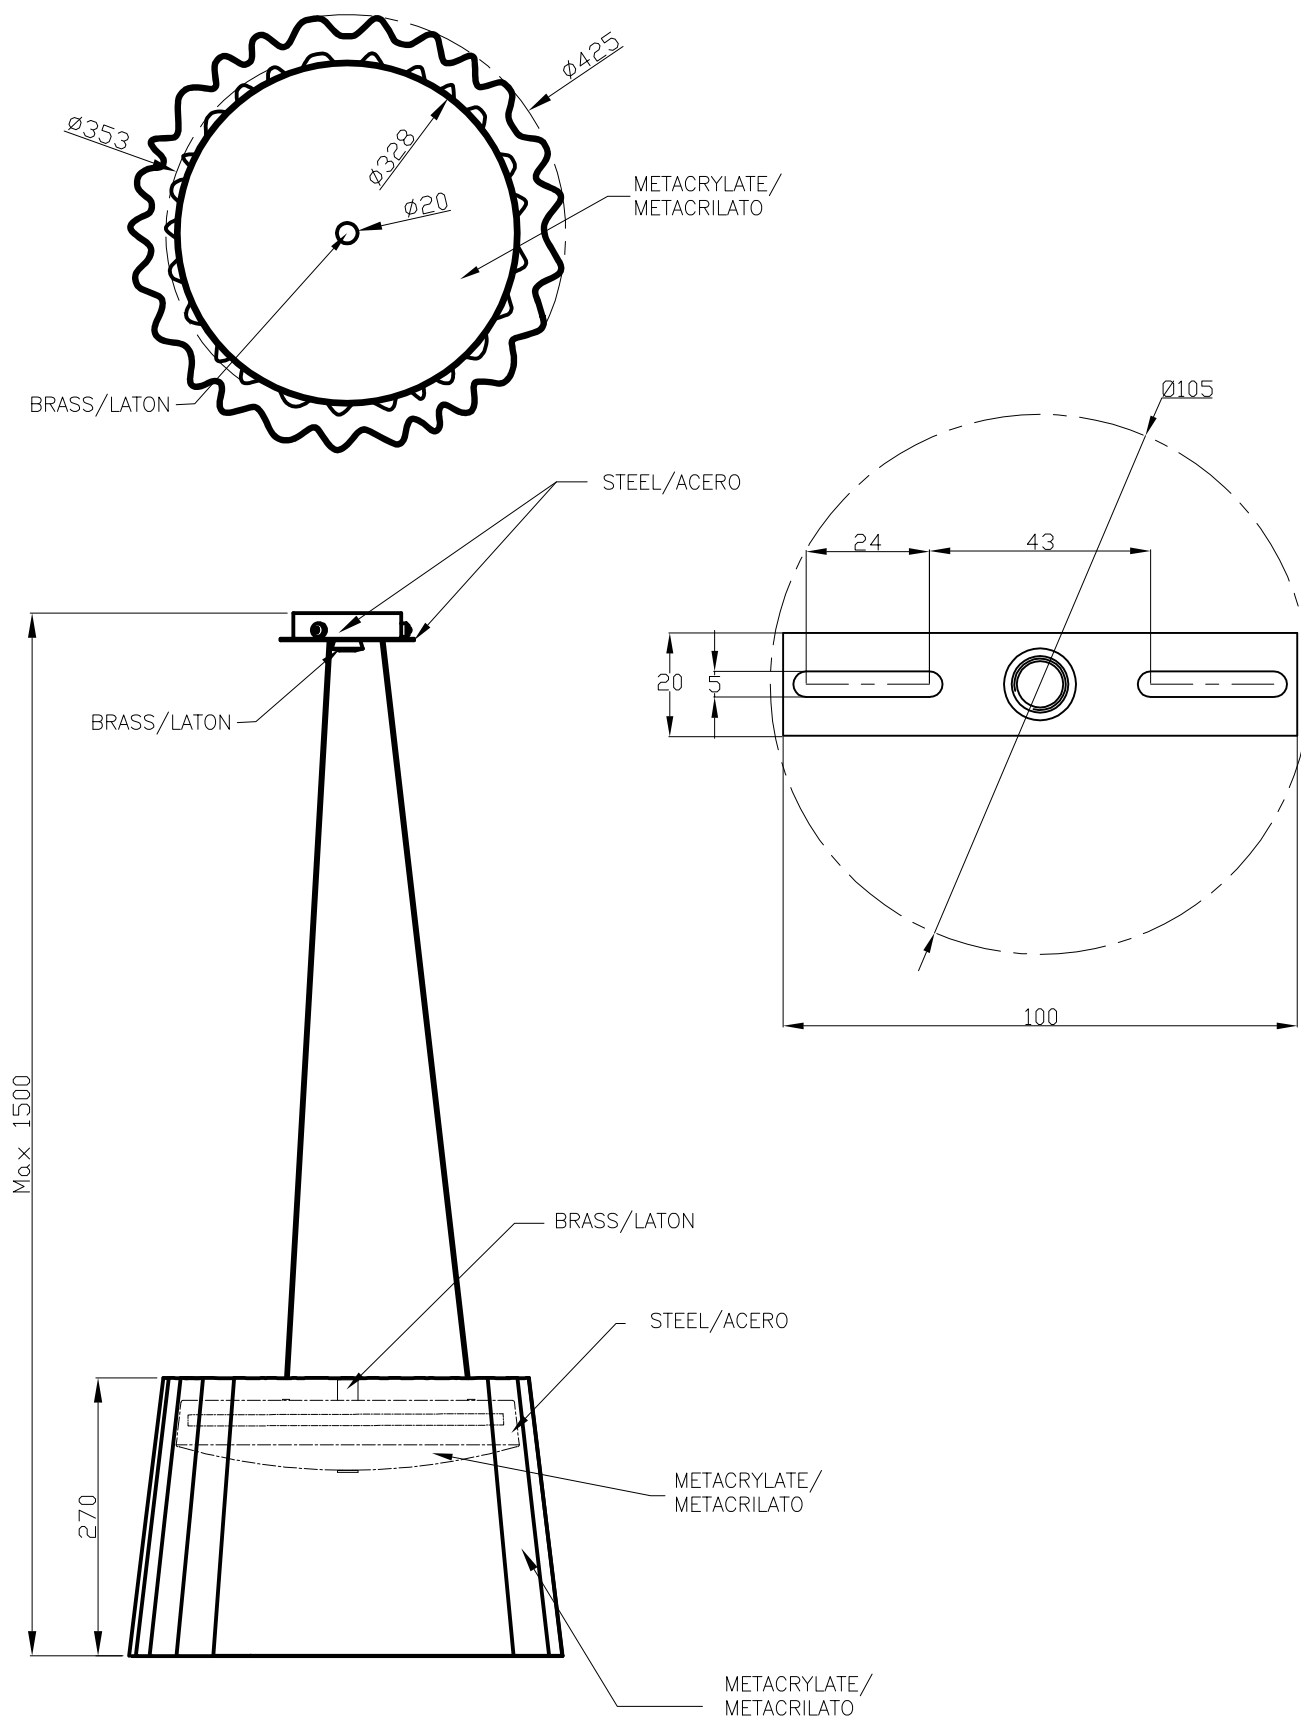


1

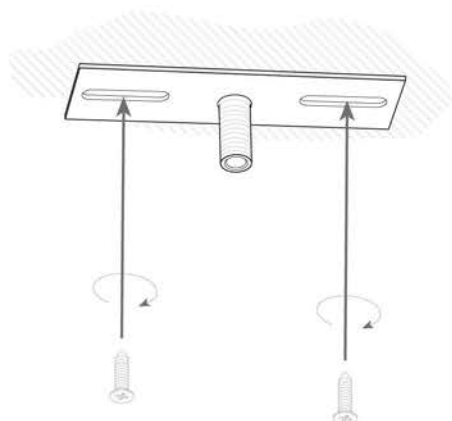


2

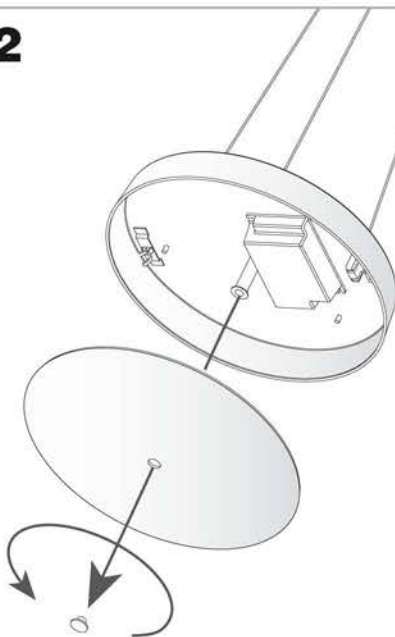

3

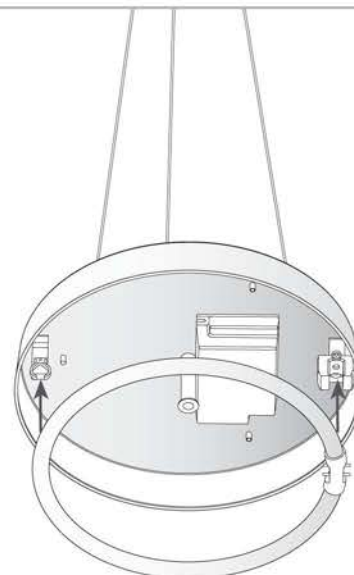


4

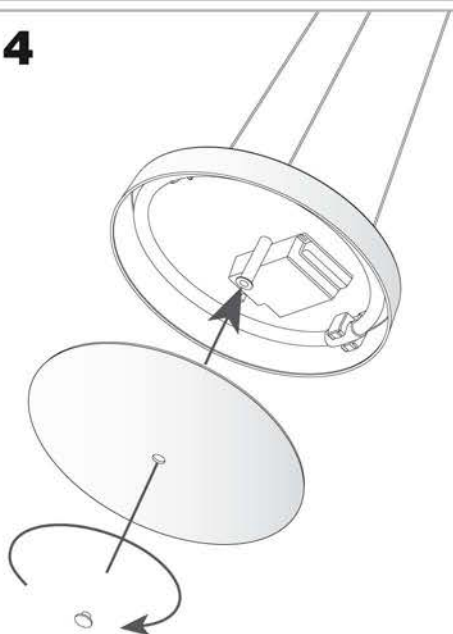


5





6

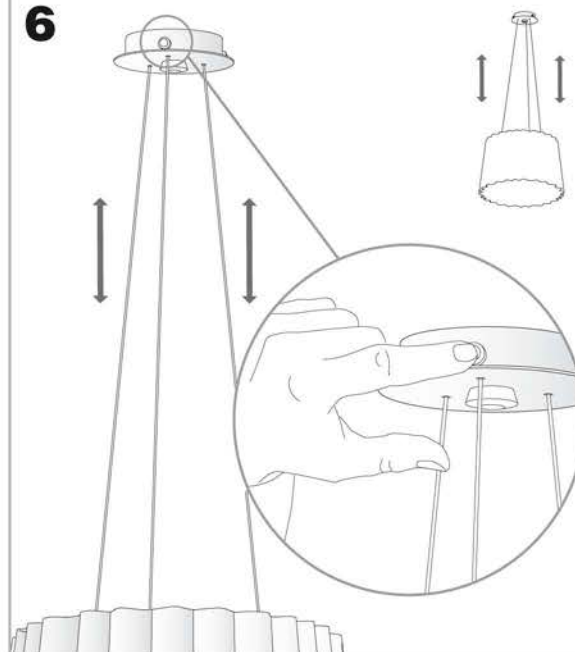

7

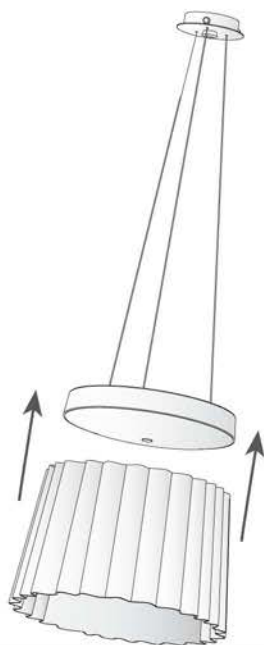

8

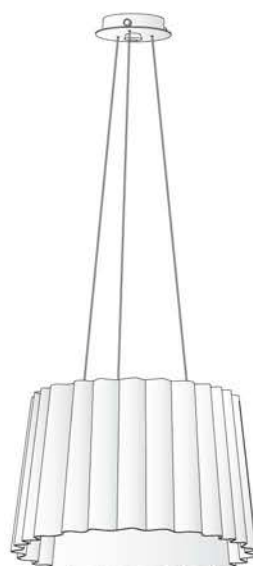

x1