


NEW DRESDE

05-0028-21-F9




The photograph may not match the reference exactly. Please read the product description to identify the finish.

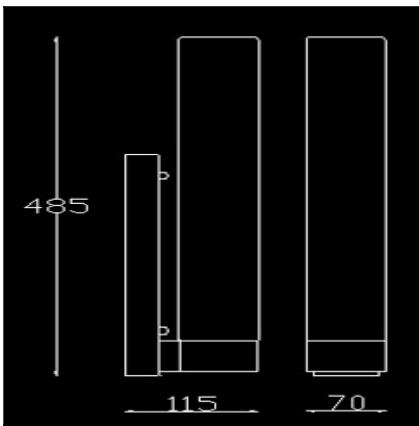

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Lampholder:	1 x 2G11
Power (W):	2G11 36W
Total power consumption (W):	34
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	4
Net Weight (Kg):	1.57
EAN:	8435111090343,00



MATERIALS / FINISHES

Structure material: Steel
Structure finish: Chrome

Diffuser material: Glass
Diffuser finish: Opal

GEAR


Gear included: Yes, electronic

Download photometric file .ldt /.ies

Luminaire		Measur.		Lamp	
Code	05-0028	Code	05-0028	Code	FLUORESCENT
Name	WALL LIGHT	Name	WALL LIGHT	Number	1
Line	Eulumdat	Date	15-11-2013	Position	
Efficiency	13.43%	Coordinate system	CG	Total Flux	3500.00 lm
Maximum value	71.19 cd	Position	C=270.00 G=38.00	Asymmetrical	
Rectangular Luminaire	Length	1 mm	Width	1 mm	Height
Rectangular Luminous Area	Length	1 mm	Width	1 mm	Height
Horizontal Luminous Area	0.000001 m2	Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000000 m2	
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		3500.00 lm	
Operator		Source voltage			
Temperature	25.00 °C	Source current			
Humidity	60.00 %	Photocell			
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FLUORESCENT	FLUORESCENT - 36.00 W	3500.00	36.00	1
C.I.E.	29 56 79 67 13	D DIN 5040		B11	
F UTE	0.09 J + 0.04 T	B NBN		BZ 7	

1mm x 1mm



C Halfplanes

180.0 ——— 0.0

270.0 ——— 90.0

ULOR 4.39 %

DLOR 9.04 %

RN 32.68 %

