




The photograph may not match the reference exactly. Please read the product description to identify the finish.

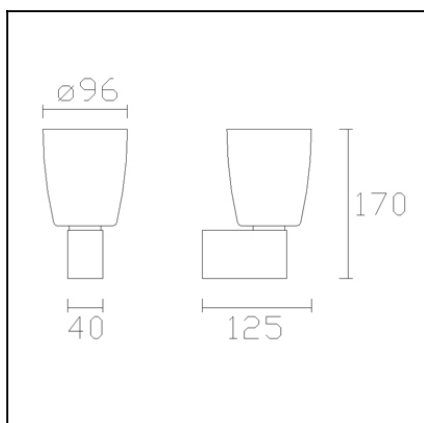

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Lampholder:	1 x E14
Power (W):	E14 40
Total power consumption (W):	40
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.69
EAN:	8435111098714,00



MATERIALS / FINISHES

Structure material: Zamak
Steel

Structure finish: Chrome

Diffuser material: Tempered glass
Tempered glass

Diffuser finish: Opal white
Transparent

Download photometric file .ldt /.ies

Report No.: 05-1383

Test Time: 2012-12-7 10:45

Luminaire Property

Luminaire Manufacturer: LEDS-C4

Luminaire Category: 05-1383

Lamp Catalog: INCANDESCENT

Number of Lamps: 1

Luminous Length (mm): 96

Luminous Height (mm): 170

Current: 0.178 A

Power Factor: 0.999

Luminaire Description: ORION

Lamp Description: E14 40W

Lumens per Lamp: 450

Luminous Width (mm): 125

Voltage: 220.7 V

Power: 39.30 W

Photometric Results

CIE Class: Semi-Direct

Measurement Flux: 290.7 lm

Downward Ratio: 44.92%

Horizontal Diffuse Angle(10%,20%,50%,75%): H260.8,H204.5,H79.3,H40.7

Vertical Diffuse Angle(10%,20%,50%,75%): V313.6,V284.1,V74.5,V55.4

Luminaire Efficacy Rating (LER): 7

Max. Intensity: 110.91 cd

Total Rated Lamp Lumens: 450.0 lm

Efficiency: 64.59%

Upward Ratio: 19.68%


Central Intensity: 47.05 cd

Pos of Max. Intensity: H180 V4

Picture Of Luminaire



Luminous Intensity Distribution Curve

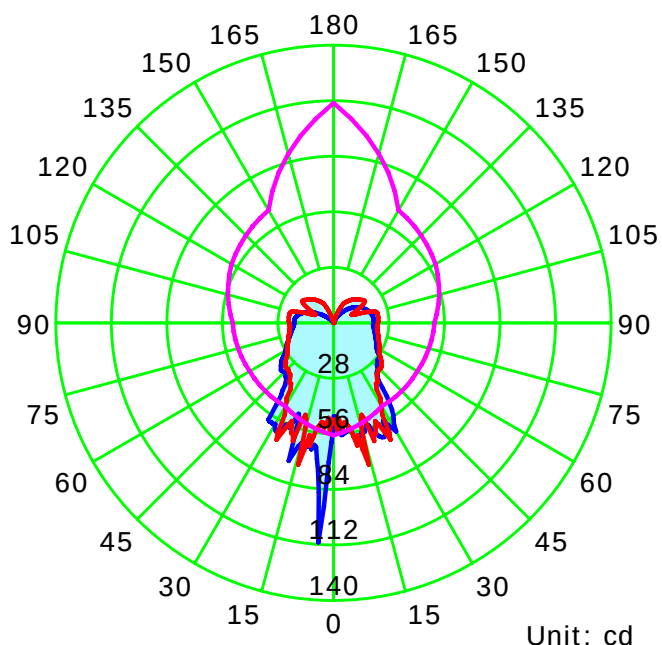

Average Diffuse Angle(50%): 76.9°

— C0-C180 — C90-C270 — G4

C Plane (°):0.0-180.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:


Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B


Distance: 5.107 m

Humidity:


Inspector:

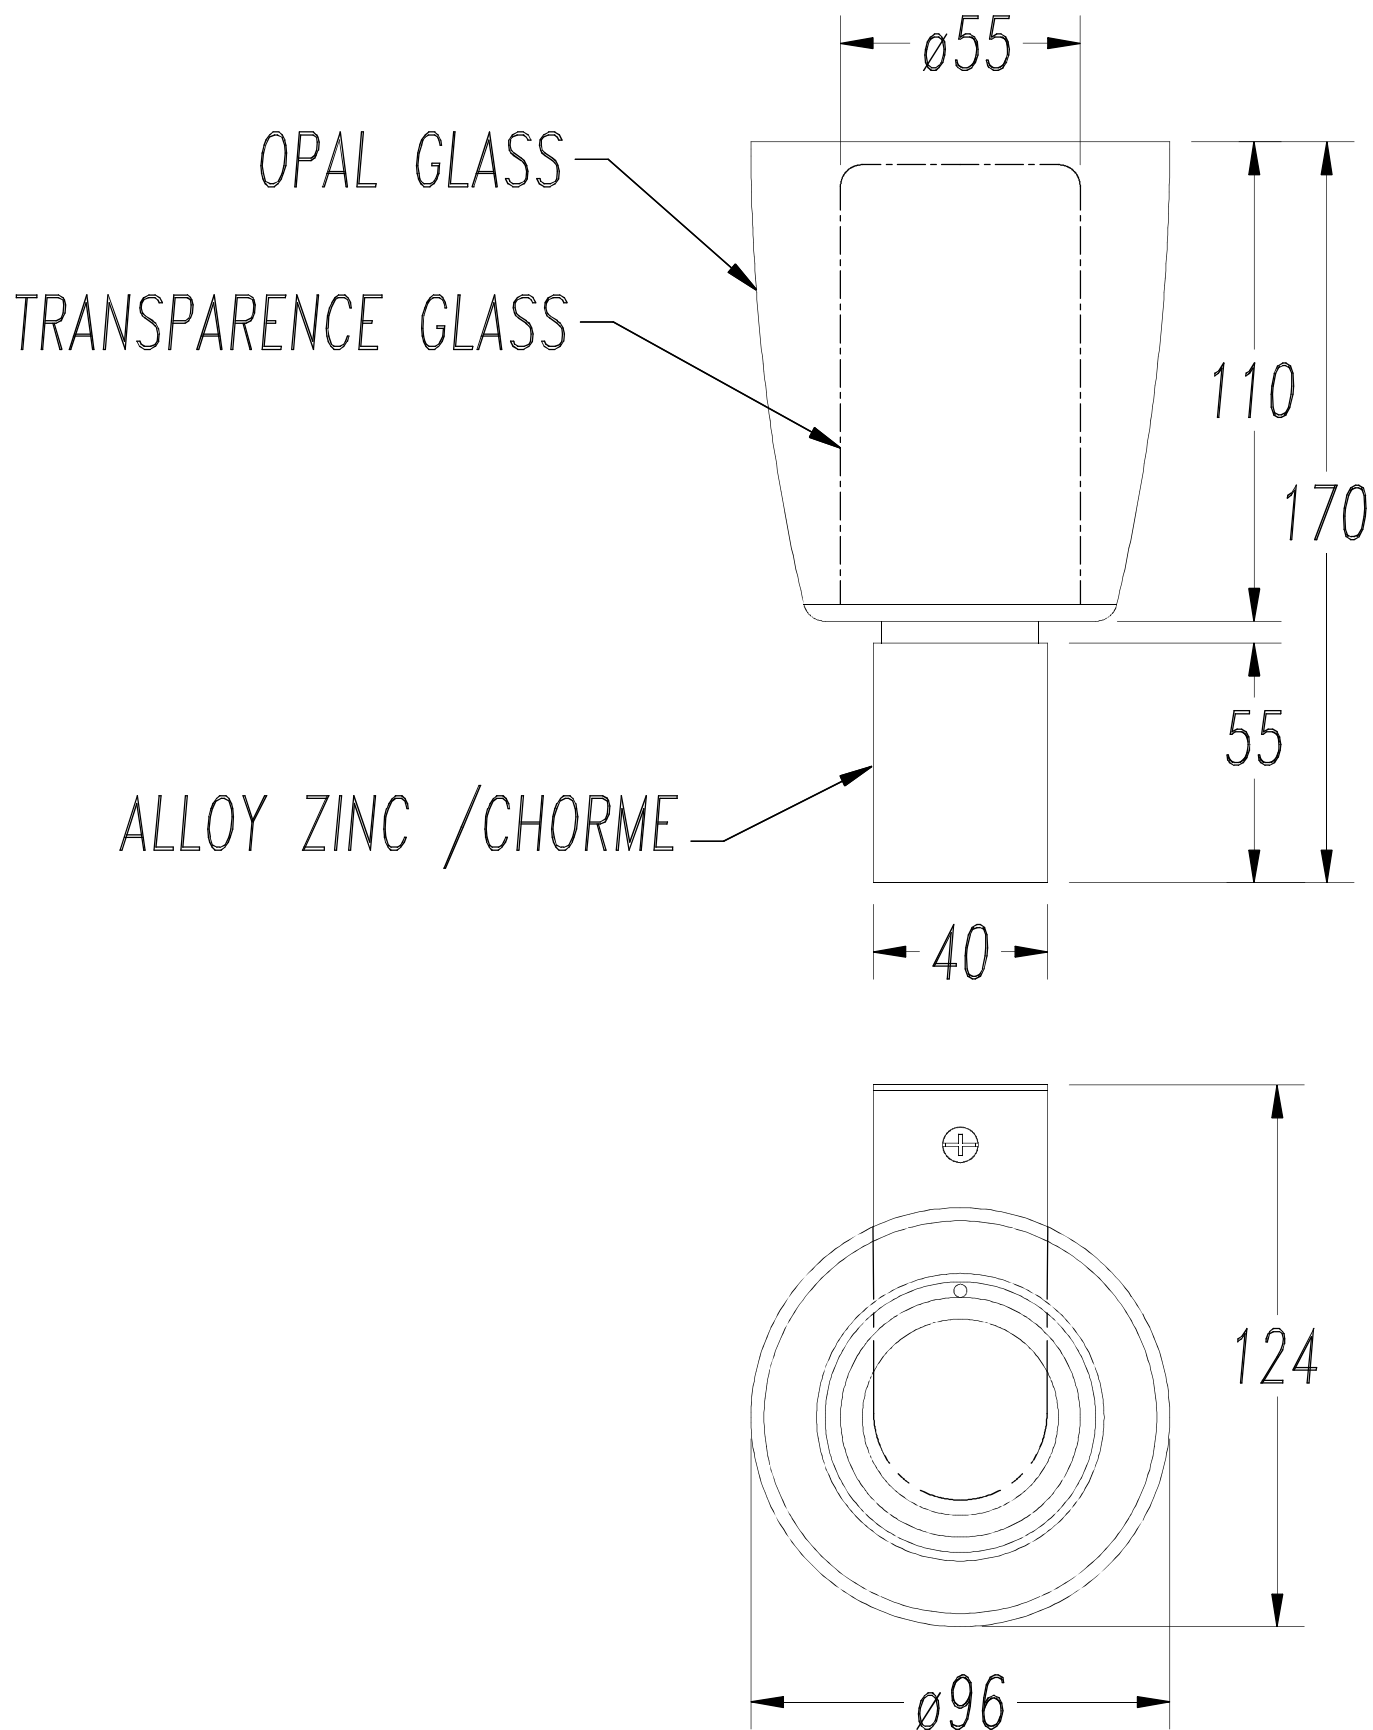


1

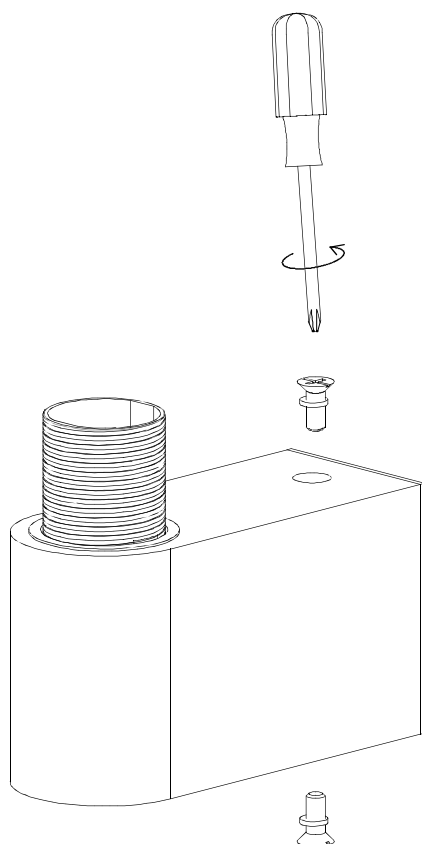



2

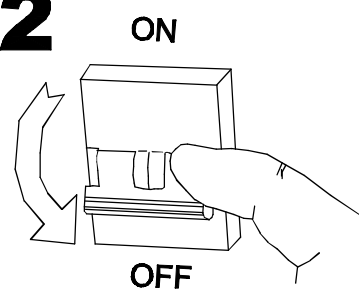

X2

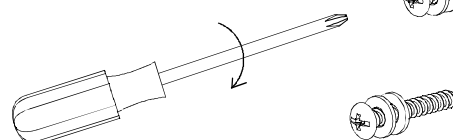


3

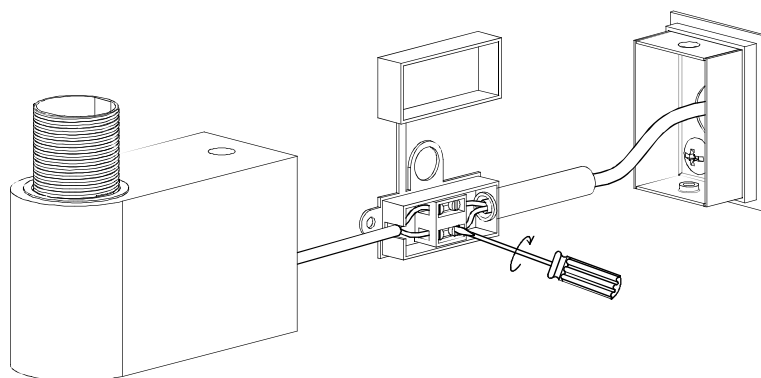


4

A

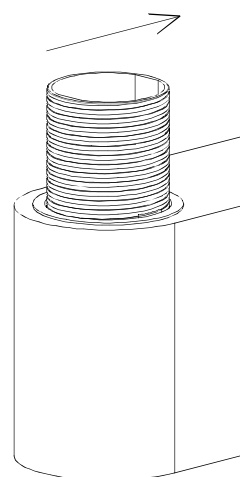

5



F

6