
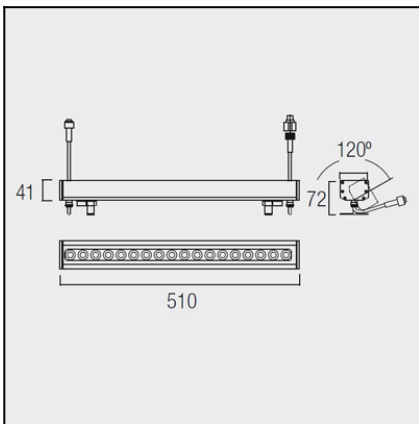




The photograph may not match the reference exactly. Please read the product description to identify the finish.


TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable $\pm 120^\circ$ on the horizontal axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Bulb:	18 x LED Cree. Led RGB
Power (W):	18
Angle Óptiques:	25°
Voltage / Frequency:	24 VDC
Warranty (Years):	3
Option to extend the guarantee:	Yes, 5 years
Units per box:	9
Net Weight (Kg):	1.23
EAN:	8435111079263,00


MATERIALS / FINISHES


Structure material:	Silver anodized aluminium	Diffuser material:	UVA glass
Structure finish:	Matt	Diffuser finish:	Transparent

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt / .ies

71-3493-00-00

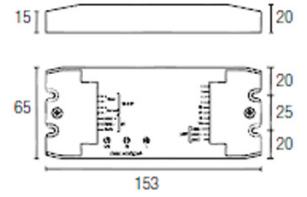


IP20

71-0019-00-00



LED stripe controller with 15 pre-set RGB programmes, 64-colour independent control ring, change of speed for programmes with colour sequence and change of light intensity for monochrome programmes. It incorporates a radio-frequency remote control.

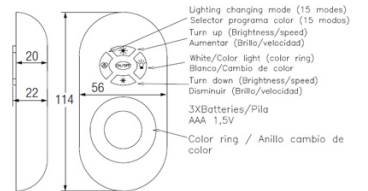


IP20

71-4662-00-00



RGB controller (without remote control)



IP20

71-4663-00-00




RGB controller (without remote control)

IP65




71-4666-00-00



Radio frequency remote control for managing the RGB 71-4662-00-00 and 71-4663-00-00 controllers. It incorporates a touchscreen which allows the user to independently control 64 colours, manage the 16 programmes of the controllers and change speeds and lig

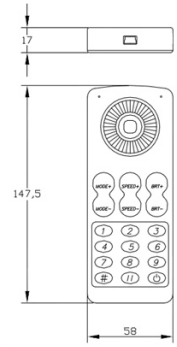

IP20

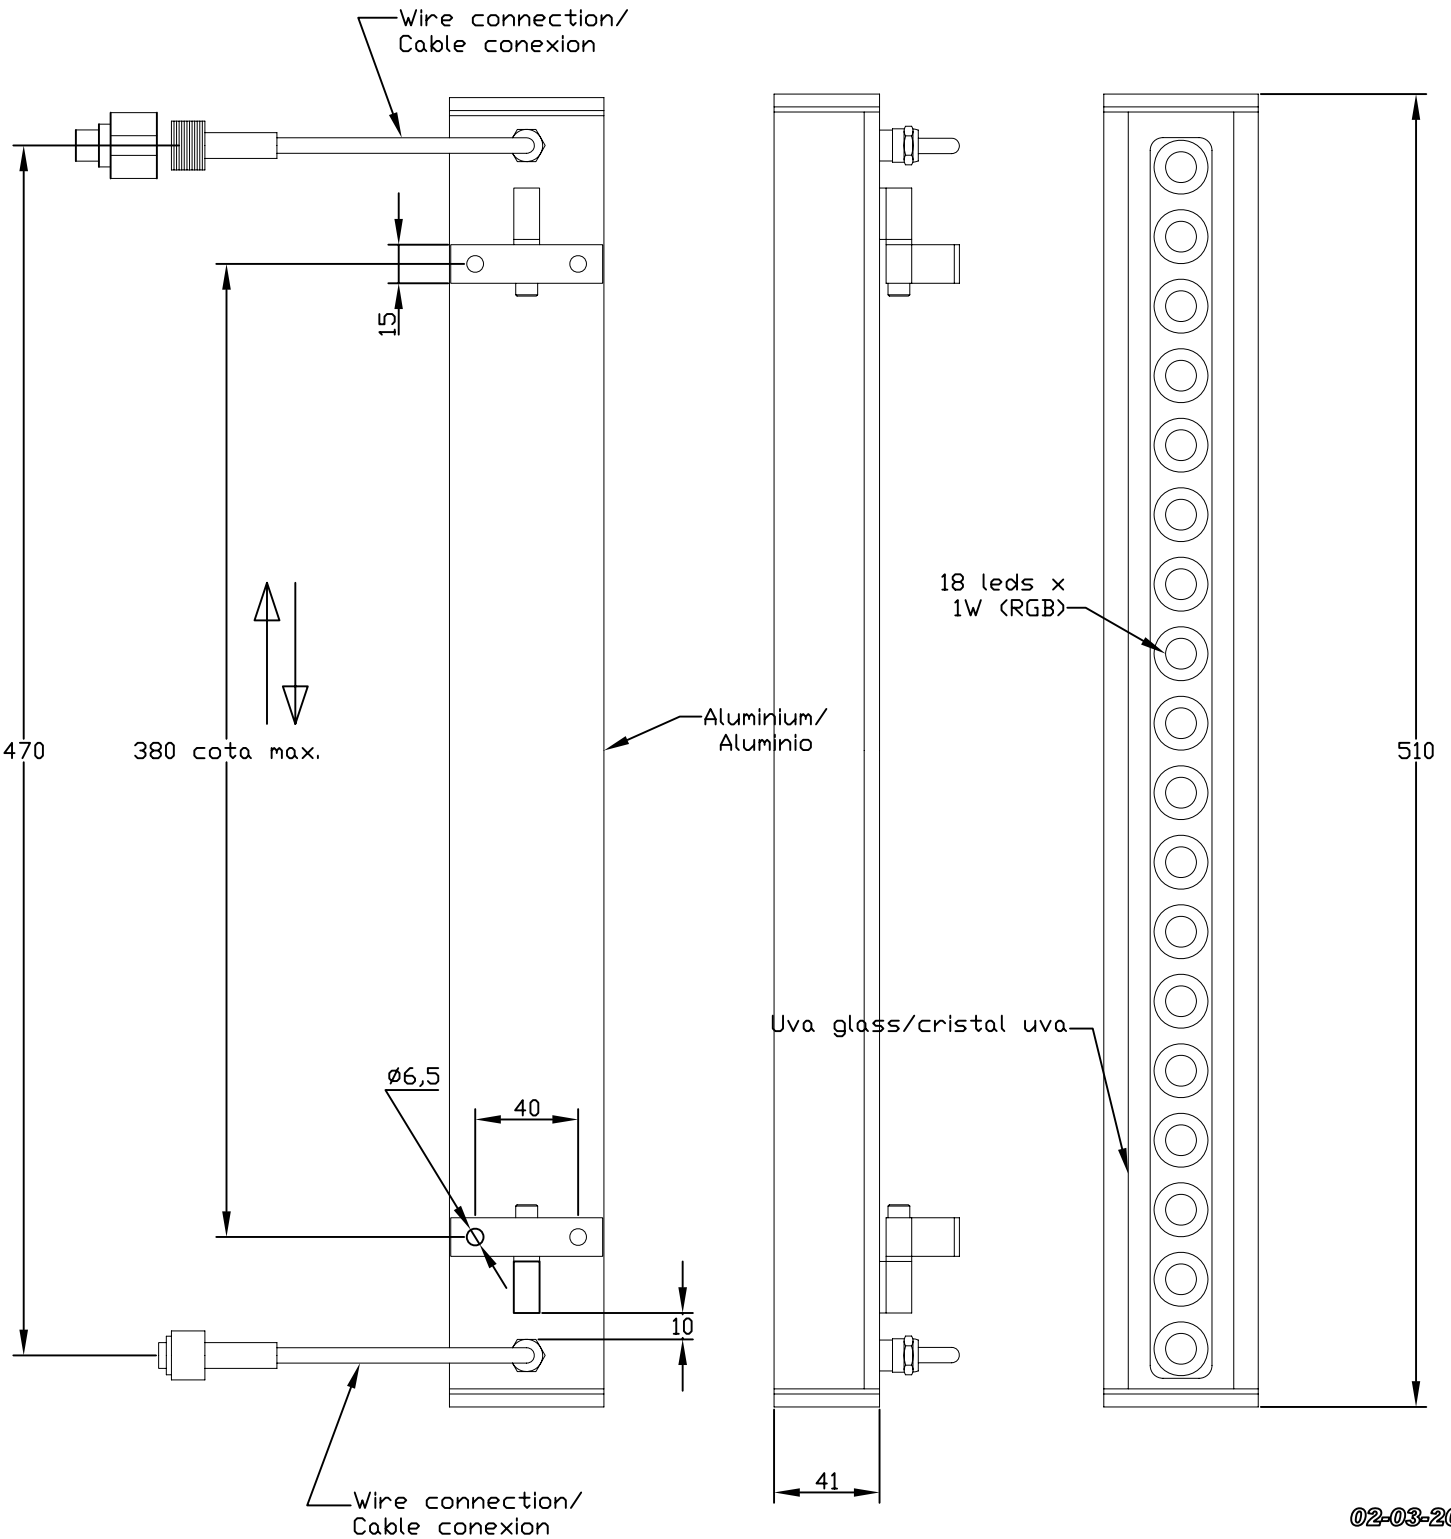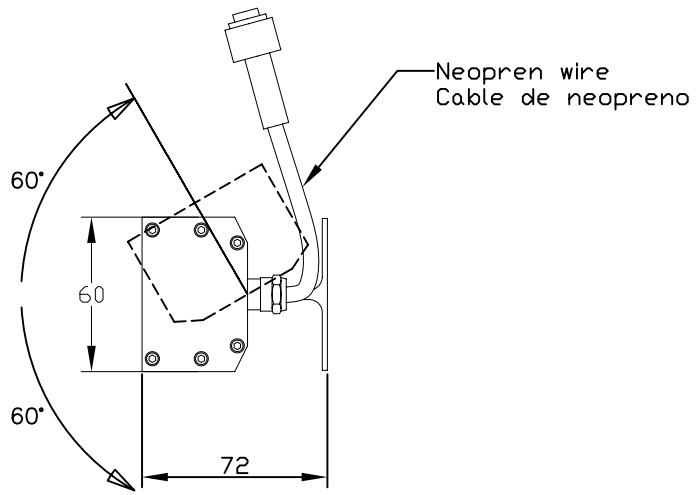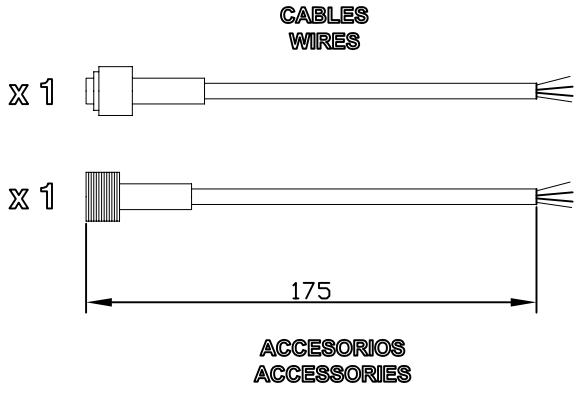



GUIA INSTALCIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-3440-54-H6 / 05-3438-54-H6 - NEUTRAL WHITE








05-4668-54-H6 / 05-4667-54-H6 - WARM WHITE

05-3441-54-H6 / 05-3439-54-H6 - RGB

LEDS-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

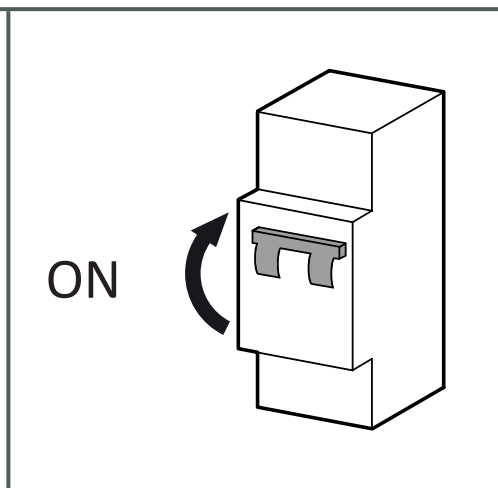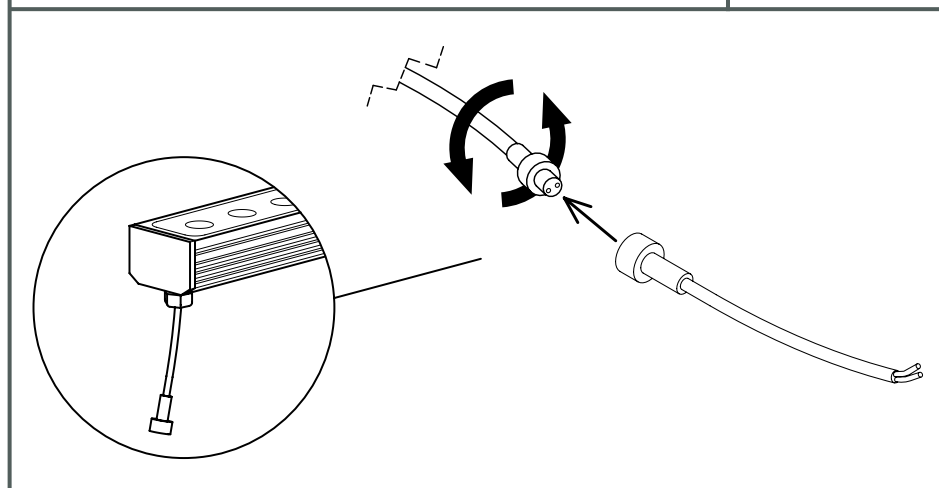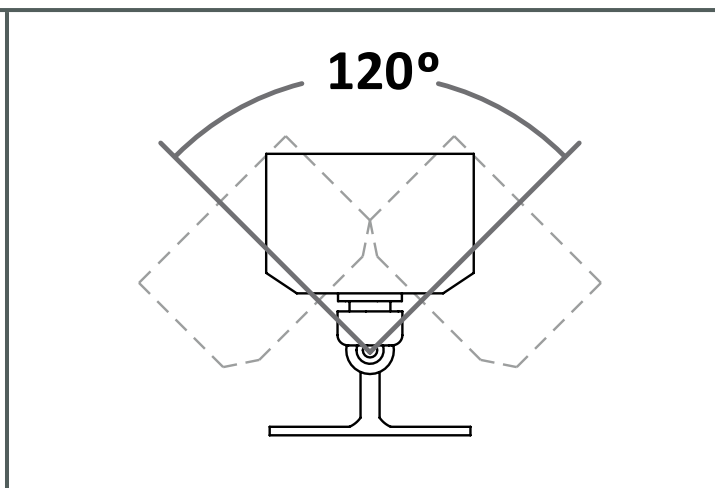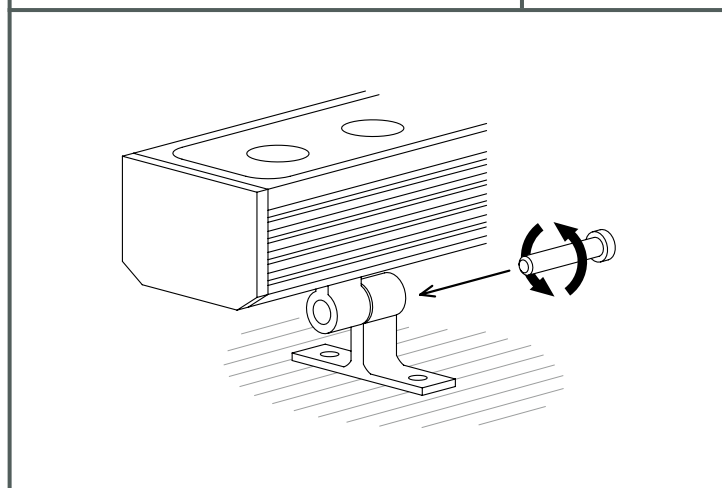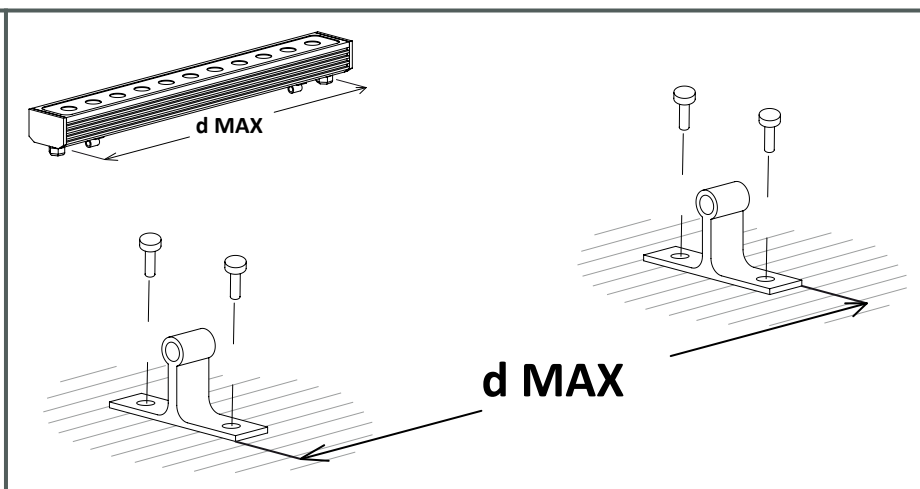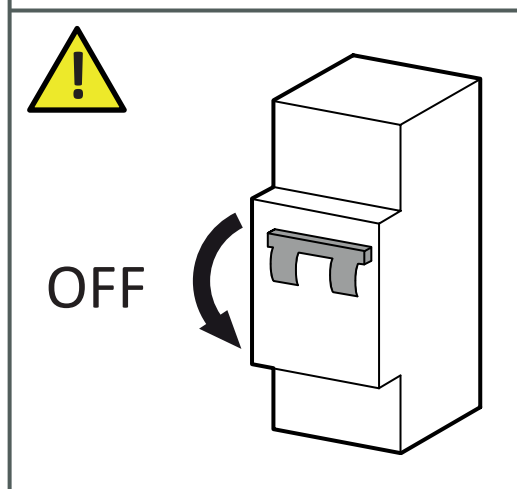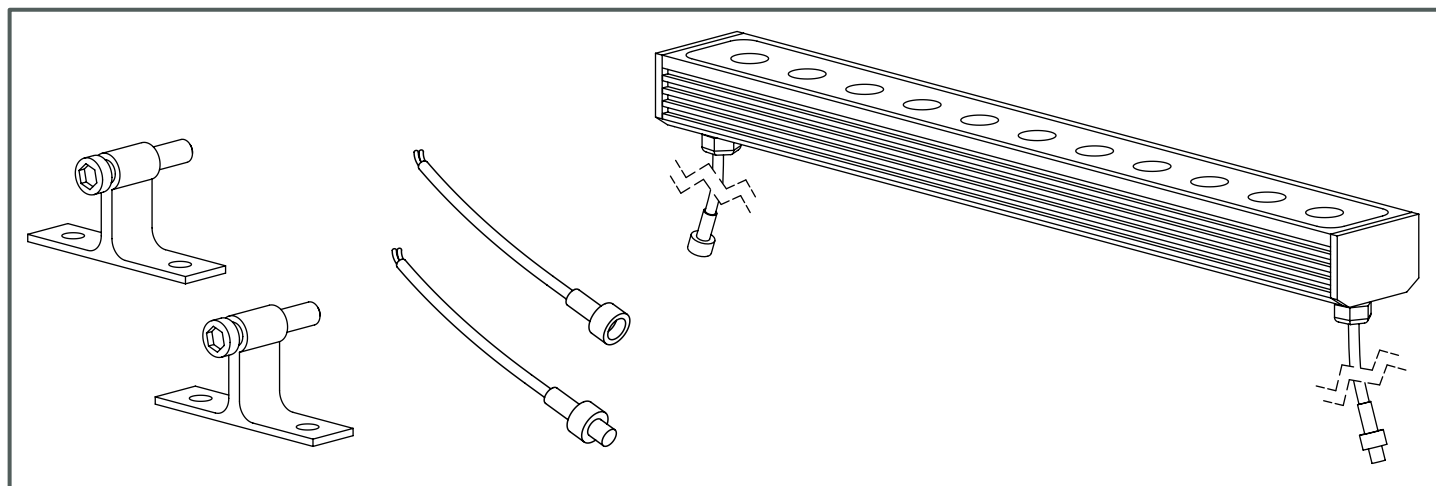

PS
24VDC

71-0038-00-00 - 26,4 W
 71-0039-00-00 - 52,8 W
 71-0063-00-00 - 76,8 W
 71-0064-00-00 - 156 W
 71-0065-00-00 - 240 W
 71-0066-00-00 - 312 W
 71-4727-00-00 - 150 W (IP67)

C
DALI

71-3473-00-00 - 120 W

C
WHITE

71-0017-00-00 - 288 W

C
DMX

71-3493-00-00 - 192 W

C
RGB

71-0019-00-00 - 432 W

A

71-3433-00-00 - 288 W
 71-1553-00-00 - 288 W

C
1-10V

71-0727-00-00 - 312 W

C
RGB


71-4662-00-00 - 432 W
 71-4663-00-00 - 432 W (IP65)
 71-4666-00-00 - REMOTE (OPTIONAL)

WHITE



05-3440-54-H6 / 05-4668-54-H6 (1,0 mt - 36W)

05-3438-54-H6 / 05-4667-54-H6 (0,5 mt - 18W)


ON / OFF

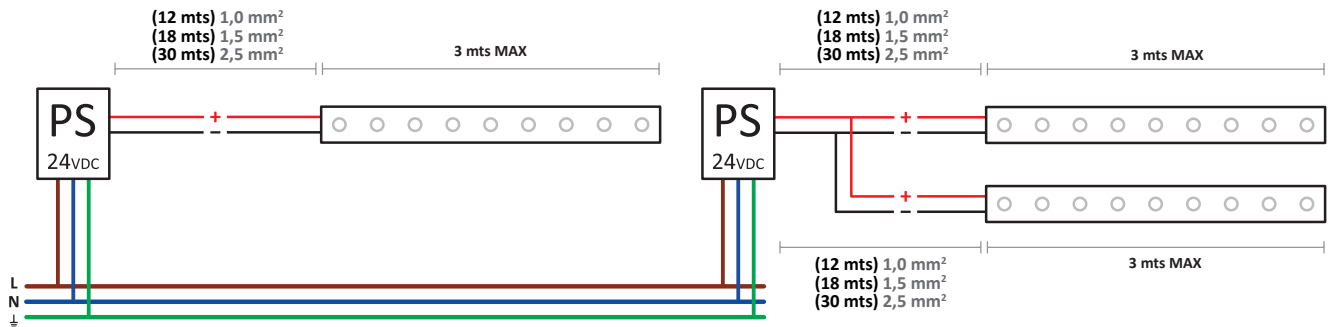


DIMMING WITH REMOTE CONTROL

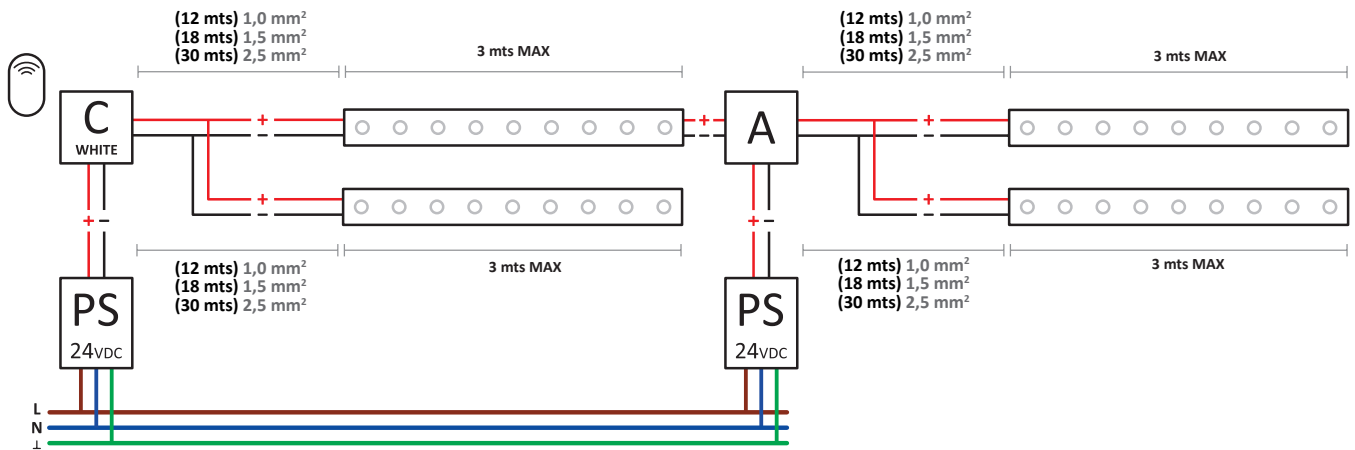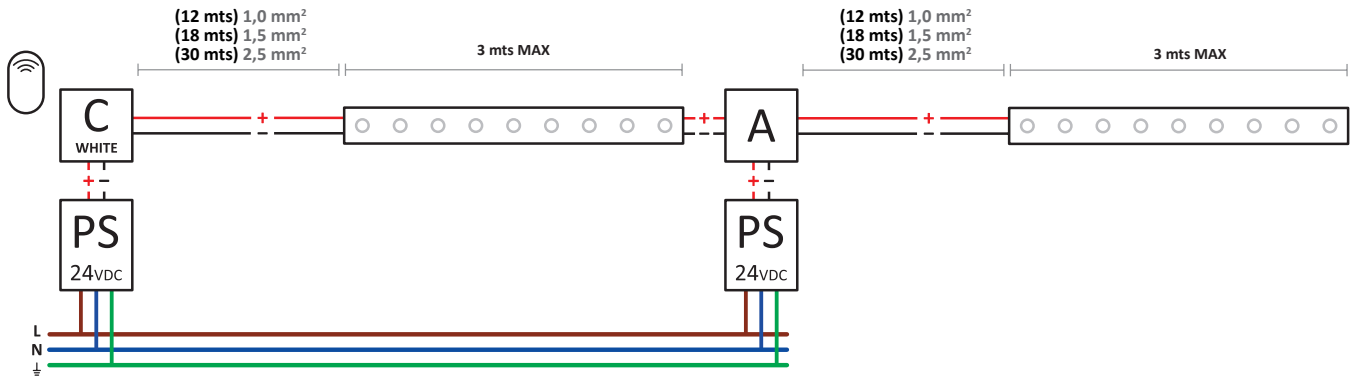

1-10V

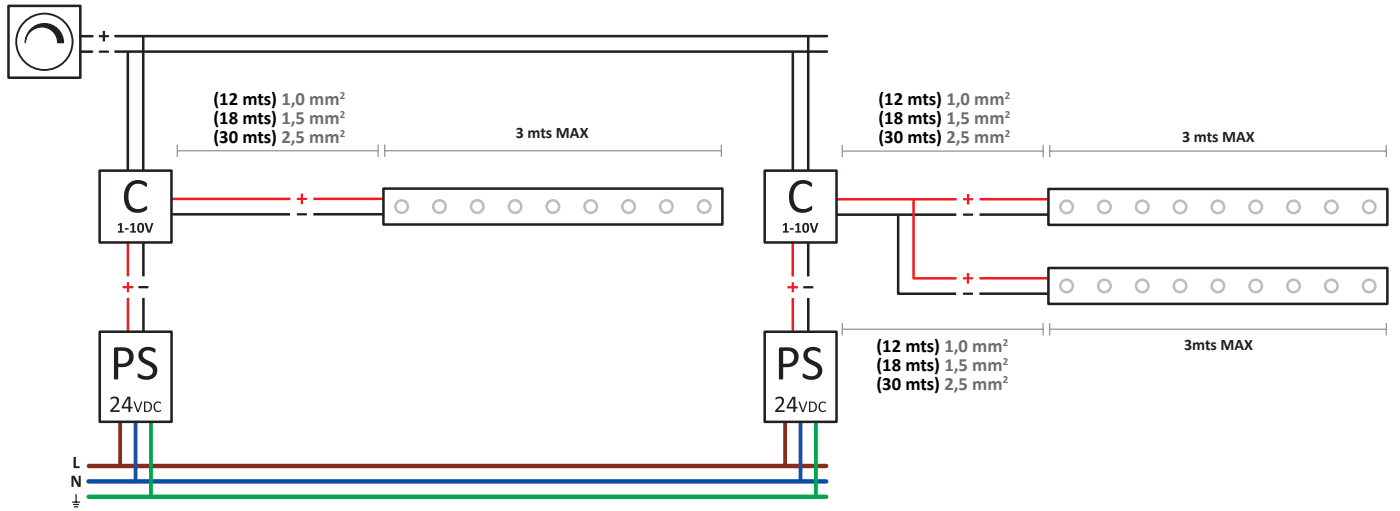

DALI

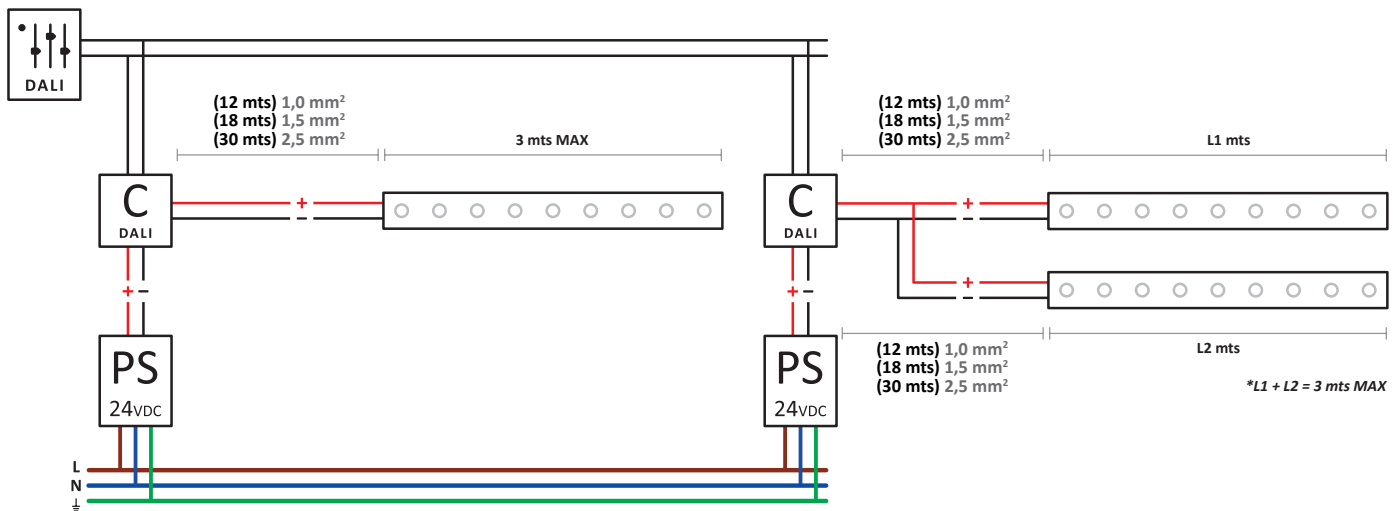



RGB

05-3441-54-H6 (1,0 mt - 36W)

05-3439-54-H6 (0,5 mt - 18W)

RGB CONTROL WITH / WITHOUT REMOTE CONTROL

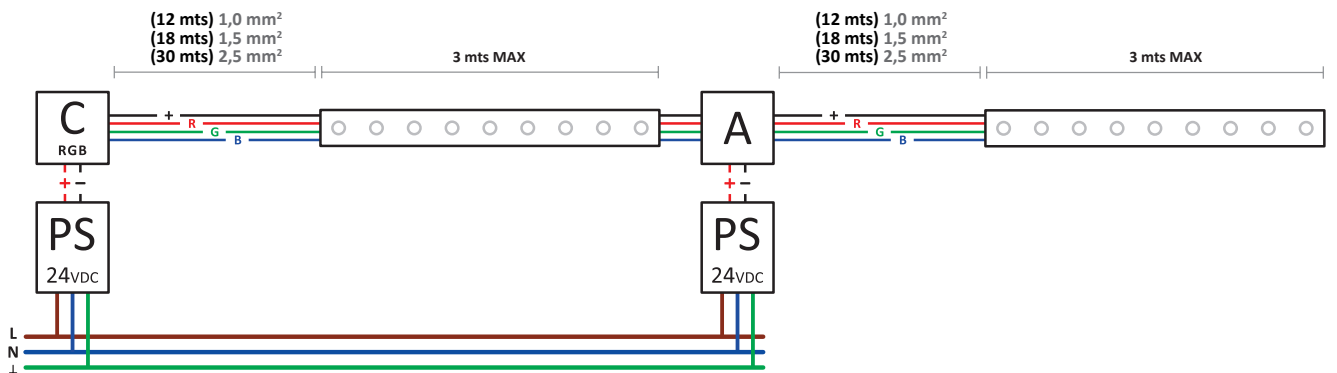

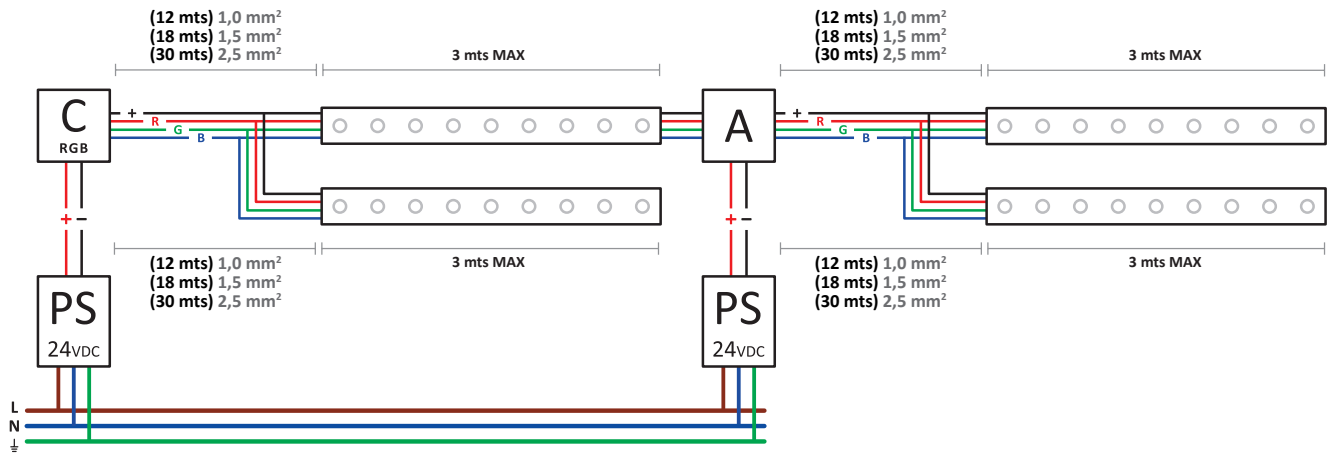

DMX

