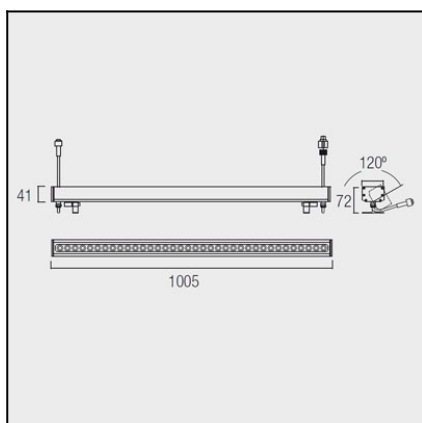


IN / OUT


The photograph may not match the reference exactly. Please read the product description to identify the finish.



DESCRIPTION

LED floodlight for indoor and outdoor use with 24VDC power supply. Extruded aluminium body, finish in anodized aluminium with UV protected glass included. Unit produces a 25° beam angle, and has 120° vertical rotation. High protection against solid particle and liquid infiltration, high IK. Includes quick installation IP connections.- 0.5m version in two different temperature colours (warm white and cool white), also RGB including 18 LEDs with 18 W power.- 1 metre version in two temperature colours (warm white and cool white) and also in RGB including 36 LEDs with 36 W power.

TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable $\pm 120^\circ$ on the horizontal axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Bulb:	36 x LED Cree. Cold White - 5500K
Power (W):	36
Luminous efficacy (Lm/W):	100
Angle Óptiques:	25°
Voltage / Frequency:	24 VDC
Warranty (Years):	3
Option to extend the guarantee:	Yes, 5 years
Units per box:	9
Net Weight (Kg):	2.19
EAN:	8435111079270,00

LED Cree Blanco neutro / Neutral white - 36w -25°



H (m)	D (m)	Emed (lux)
1	0.33	6645
2	0.65	1661
3	0.98	738
4	1.30	415
5	1.63	266


MATERIALS / FINISHES


Structure material:	Silver anodized aluminium	Diffuser material:	UVA glass
Structure finish:	Matt	Diffuser finish:	Transparent

Download photometric file .ldt / .ies

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

71-0017-00-00

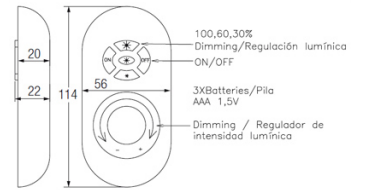


IP20

Luminaria		Ensayo		Lámpara		
Código	05-3440-54-H6	Código	05-3440-54-H6	Código	05-3440-54-H6	
Nombre	Luminaria TRON led 36x1W 350mA	Nombre	Luminaria TRON led 36x1W 350mA	Número	1	
Familia	- LEDS C4 LEDS	Fecha	08-09-2011	Posición	Universal	
Rendimiento	100.00%	Sist. de Coorden.	C-G	Flujo Total	2301.86 lm	
Valor Máximo	12628.54 cd	Posición	C=0.00 G=0.00	Bisimétrico		
Luminaria Rectangular	Longit.	1000 mm	Anchura	60 mm	Altura	40 mm
Área Luminosa Rectangular	Longit.	960 mm	Anchura	120 mm	Altura	0 mm
Área Luminosa Horizontal		0.115200 m2	Área Emisión sobre Pl. 180°			0.000000 m2
Área Emisión sobre Pl. 0°		0.000000 m2	Área Emisión sobre Pl. 270°			0.000000 m2
Área Emisión sobre Pl. 90°		0.000000 m2	Área de deslumbramiento a 76°			0.027869 m2
Tipo de Simetría	Bisimétrico	Máximo Ángulo Gamma	180			
Distancia de Ensayo	6.44	Flujo de Ensayo	2301.86 lm			
Operador	Asselum T2	Tensión de alimentación	230.00 V			
Temperatura	25.00 °C	Corriente de alimentación				
Humedad	50.00 %	Fotocélula	PRC			
Notas						

Lámparas de la Luminaria					
Familia	Código	Nombre	Flujo/lm	Pot.W	Cant.
- LEDS C4 LEDS	05-3440-54-H6	Lámpara led	2301.86	36.00	1
C.I.E.	95 98 100 100 100	D DIN 5040		A60	
F UTE	1.00 A + 0.00 T	B NBN		BZ 1	


1000mm x 60mm





ULOR 0.00 %




DLOR 100.00 %

RN 0.00 %

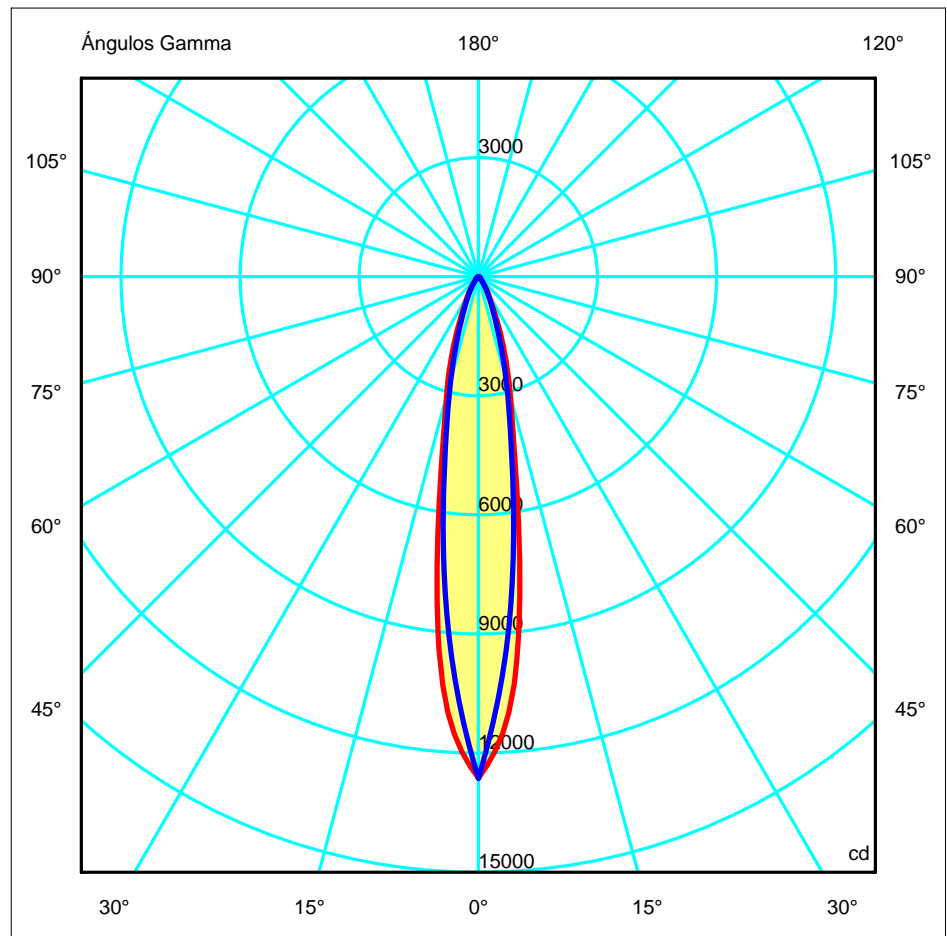



ACCESORIOS
ACCESSORIES

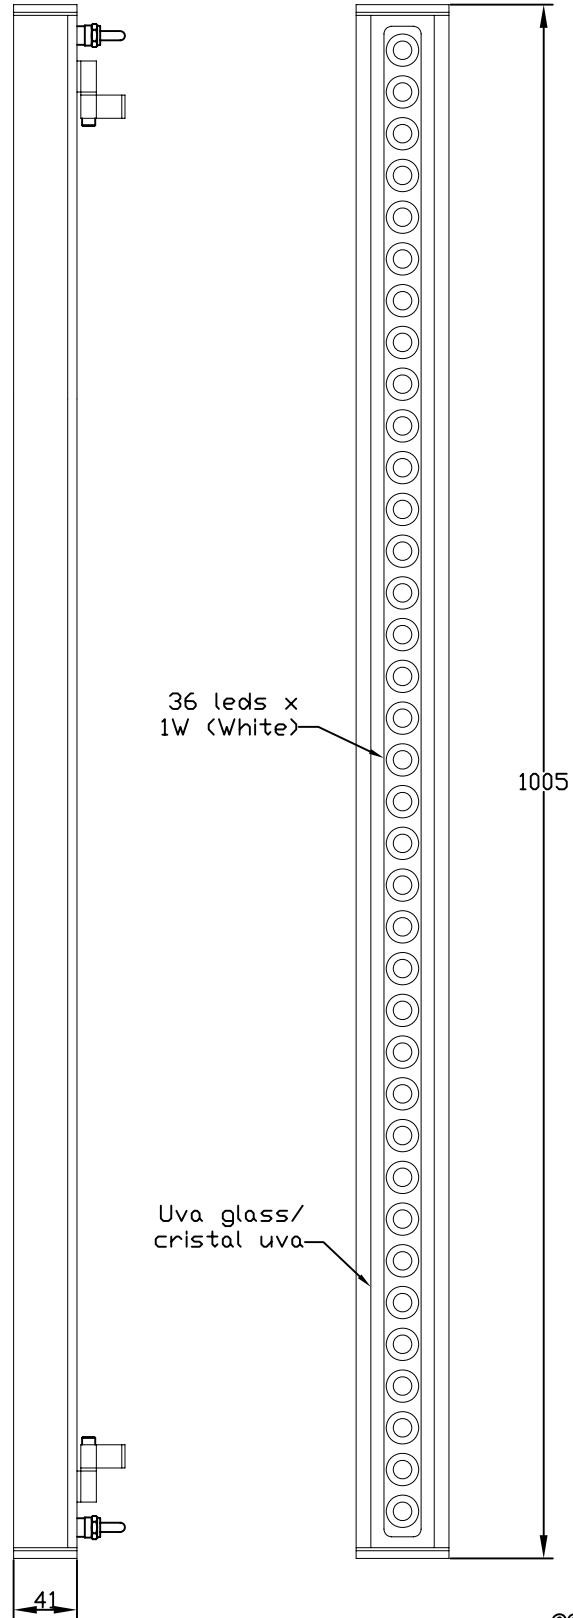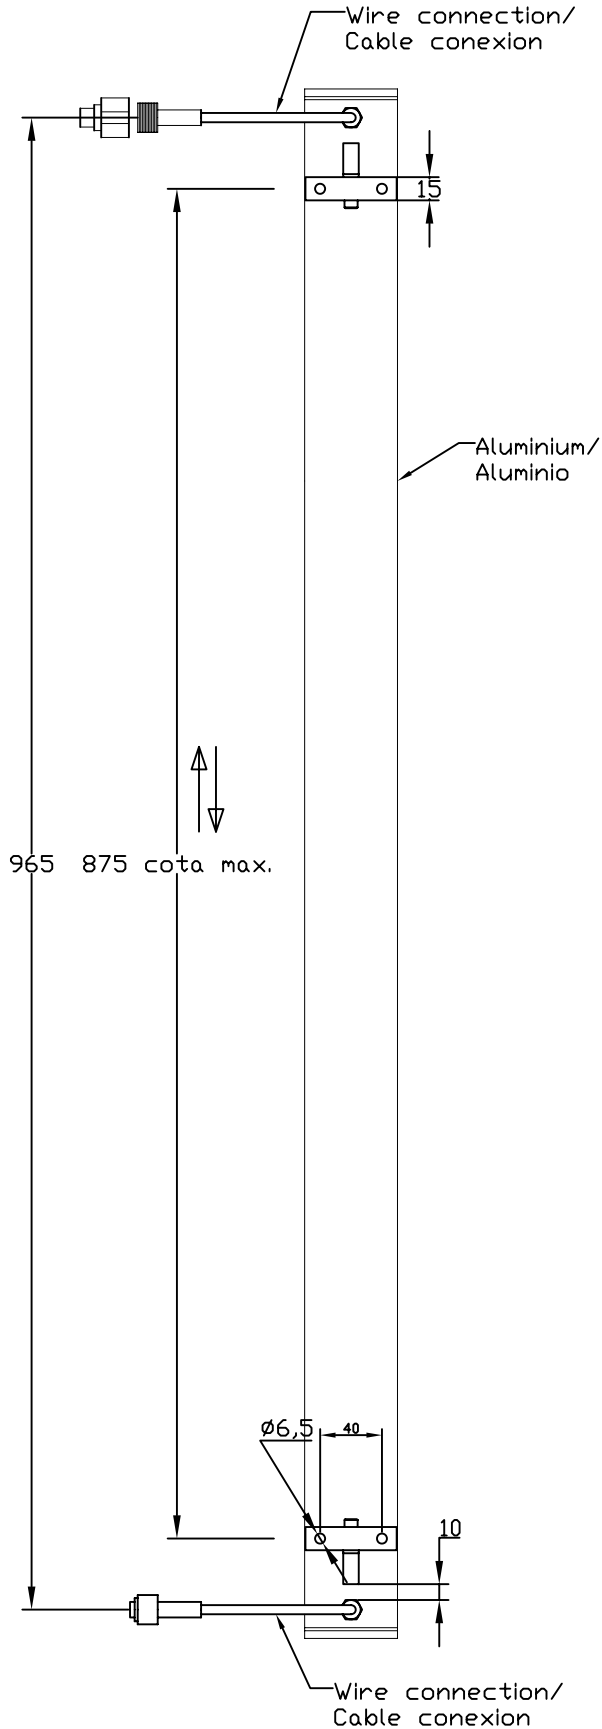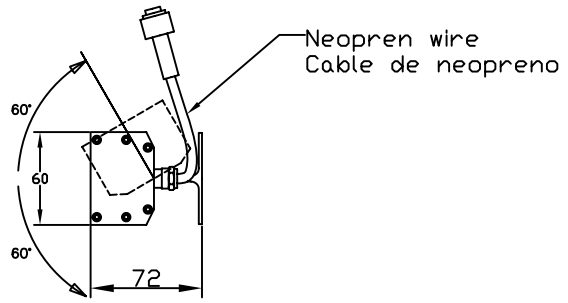



GUIA INSTALCIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-3440-54-H6 / 05-3438-54-H6 - NEUTRAL WHITE








05-4668-54-H6 / 05-4667-54-H6 - WARM WHITE

05-3441-54-H6 / 05-3439-54-H6 - RGB

LEDS-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

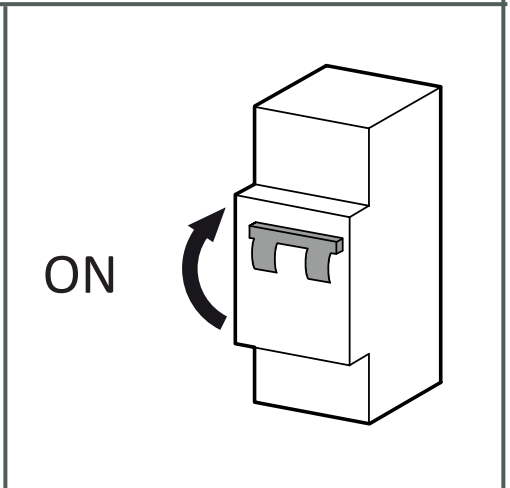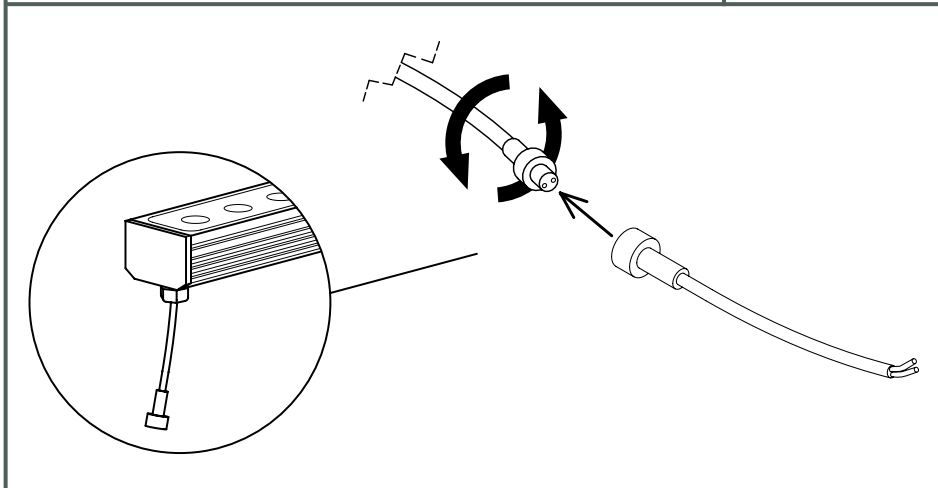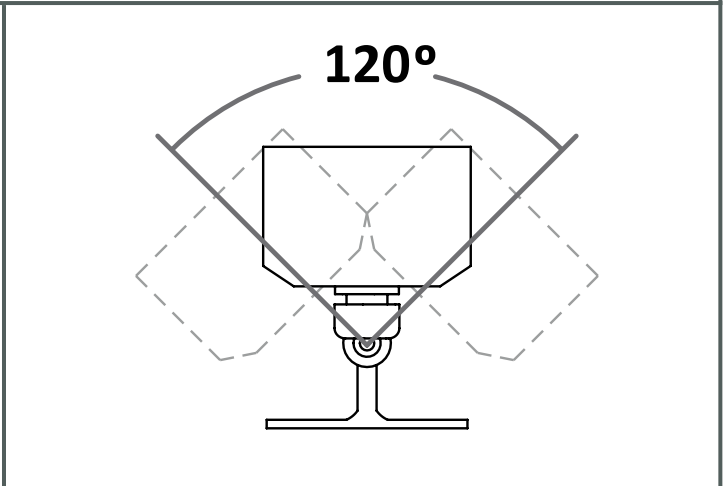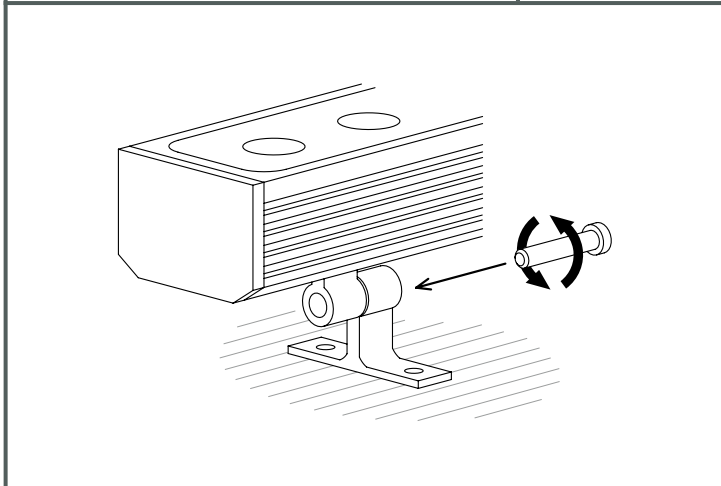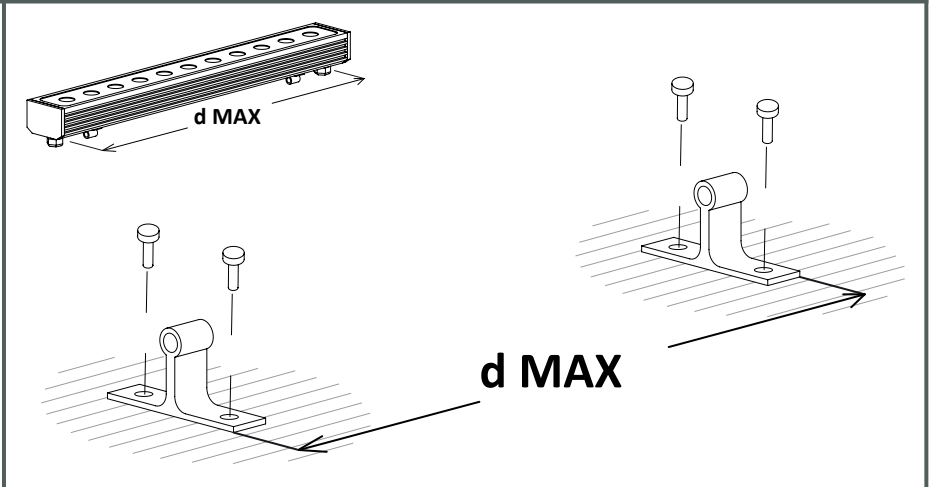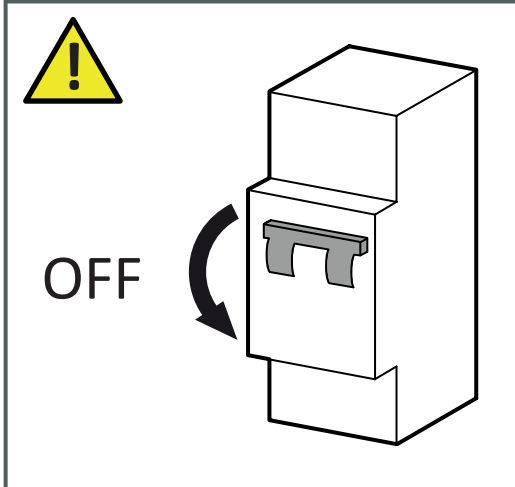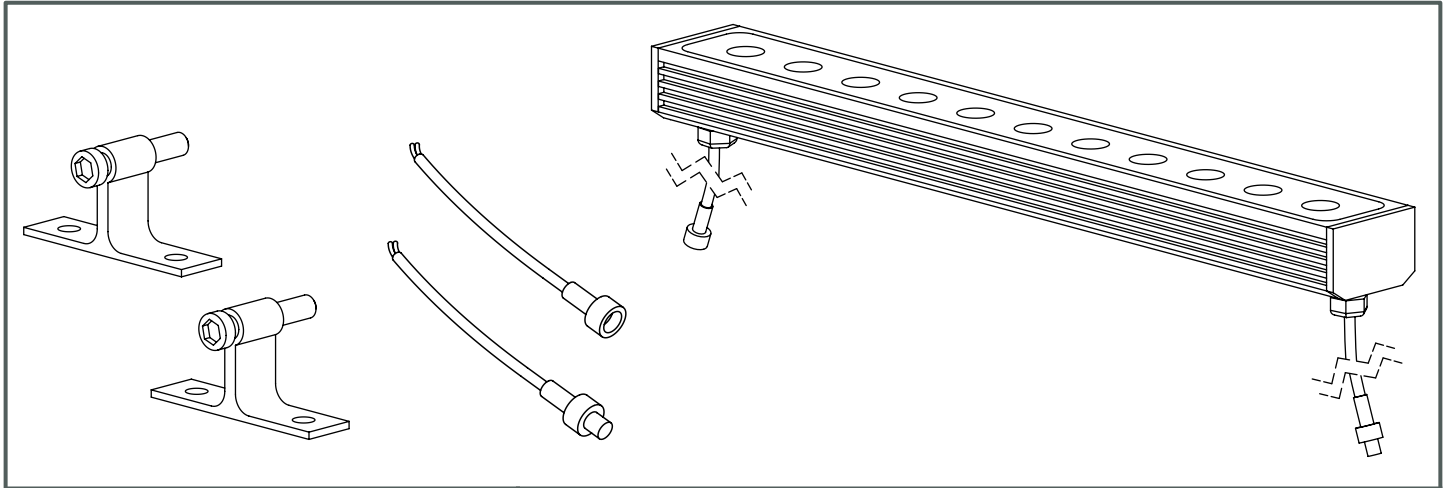

PS
24VDC

71-0038-00-00 - 26,4 W
 71-0039-00-00 - 52,8 W
 71-0063-00-00 - 76,8 W
 71-0064-00-00 - 156 W
 71-0065-00-00 - 240 W
 71-0066-00-00 - 312 W
 71-4727-00-00 - 150 W (IP67)

C
DALI

71-3473-00-00 - 120 W

C
WHITE

71-0017-00-00 - 288 W

C
DMX

71-3493-00-00 - 192 W

C
RGB

71-0019-00-00 - 432 W

A

71-3433-00-00 - 288 W
 71-1553-00-00 - 288 W

C
1-10V

71-0727-00-00 - 312 W

C
RGB


71-4662-00-00 - 432 W
 71-4663-00-00 - 432 W (IP65)
 71-4666-00-00 - REMOTE (OPTIONAL)

WHITE



05-3440-54-H6 / 05-4668-54-H6 (1,0 mt - 36W)

05-3438-54-H6 / 05-4667-54-H6 (0,5 mt - 18W)


ON / OFF

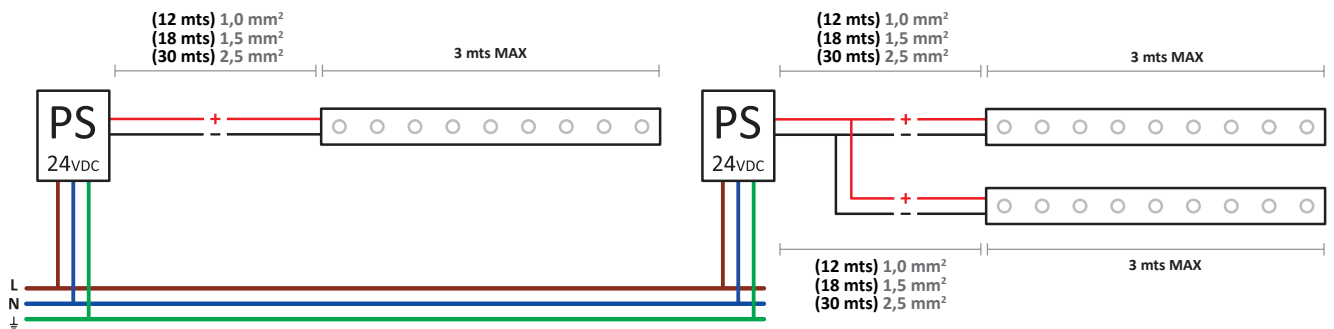


DIMMING WITH REMOTE CONTROL

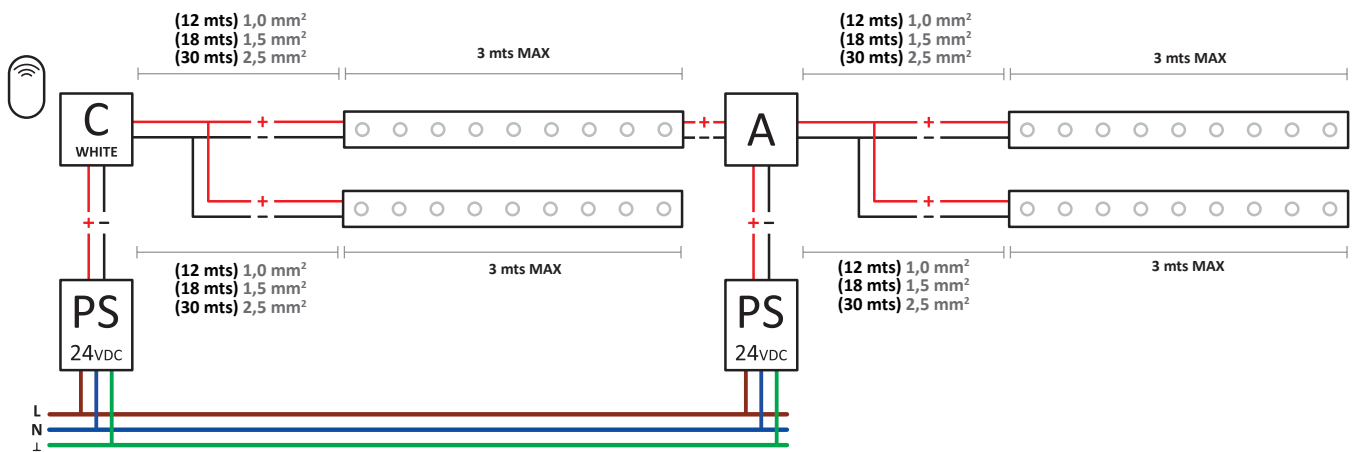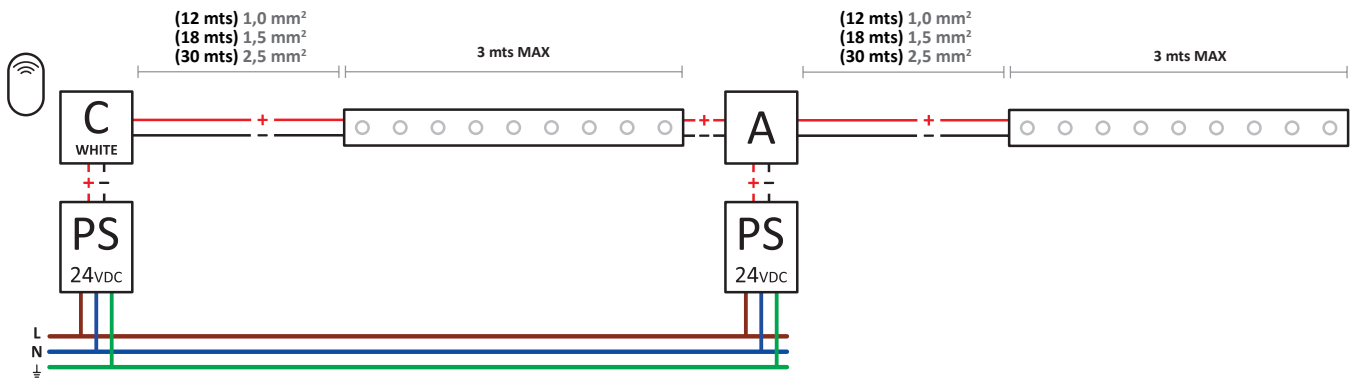

1-10V

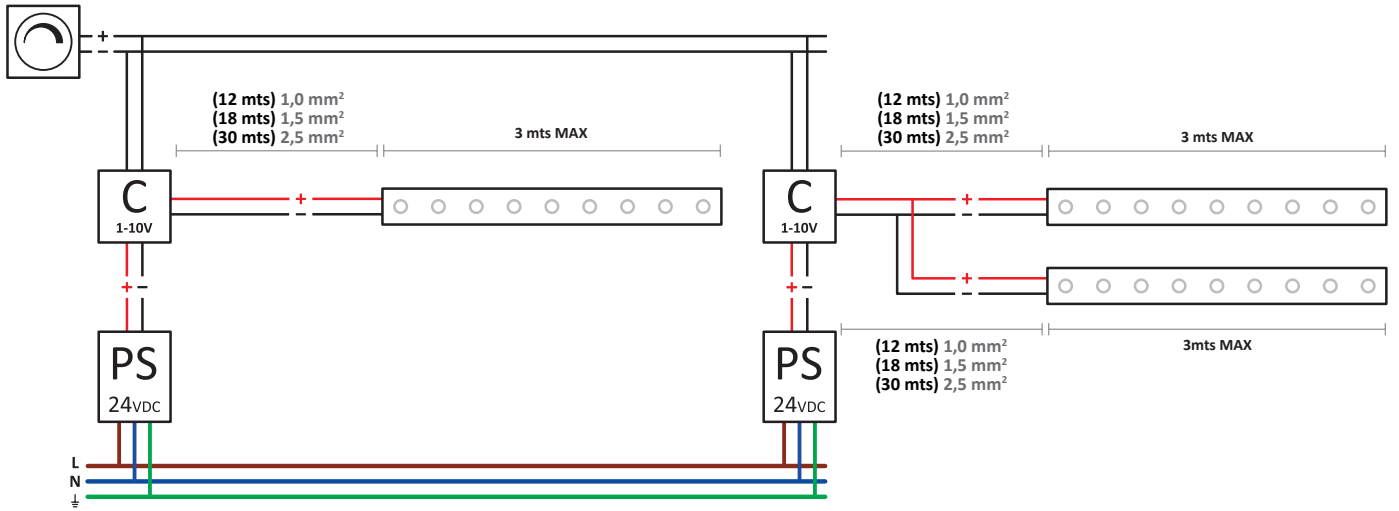

DALI

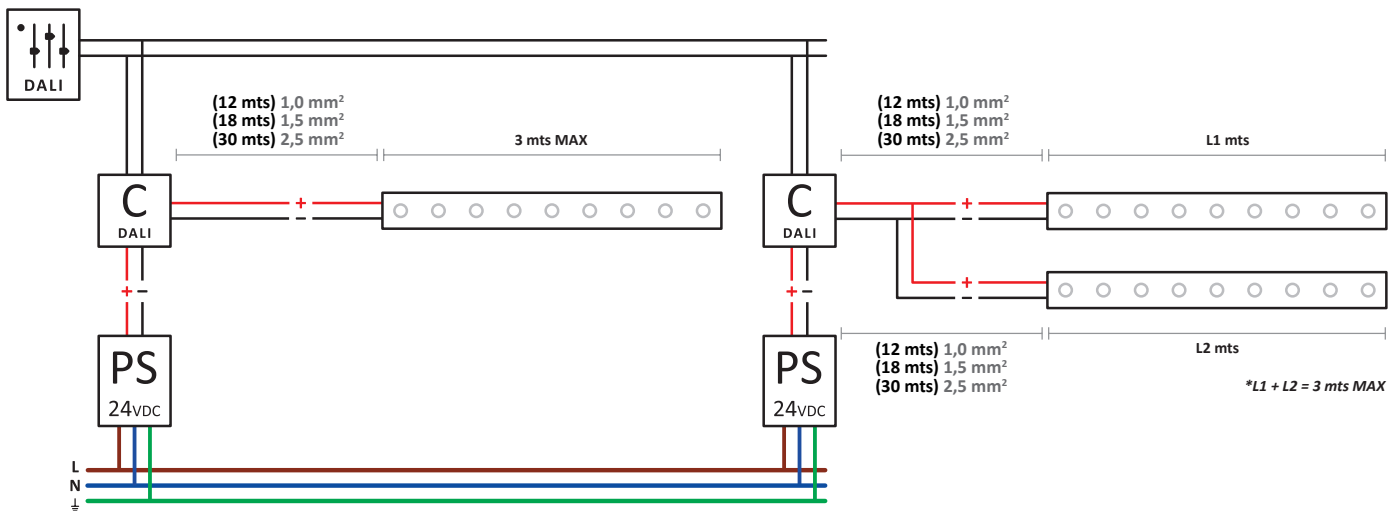



RGB

05-3441-54-H6 (1,0 mt - 36W)

05-3439-54-H6 (0,5 mt - 18W)

RGB CONTROL WITH / WITHOUT REMOTE CONTROL

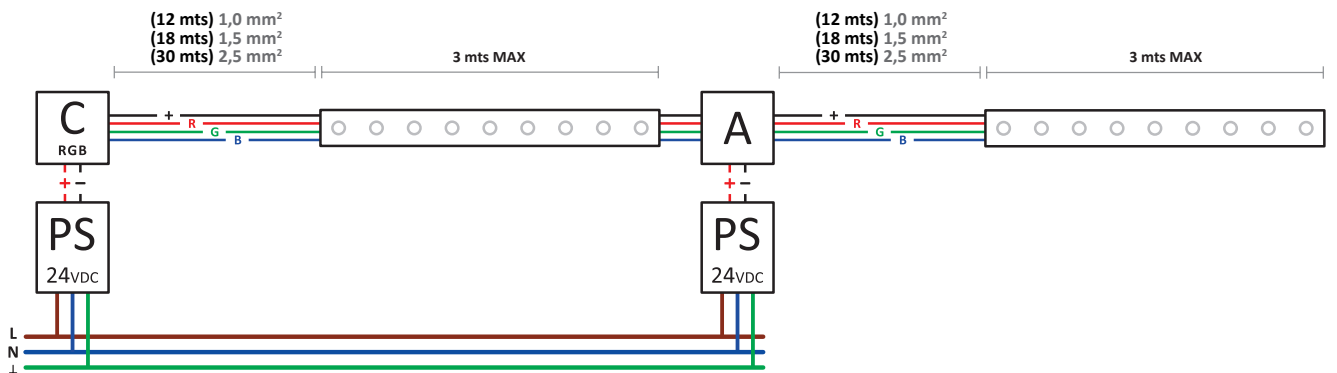

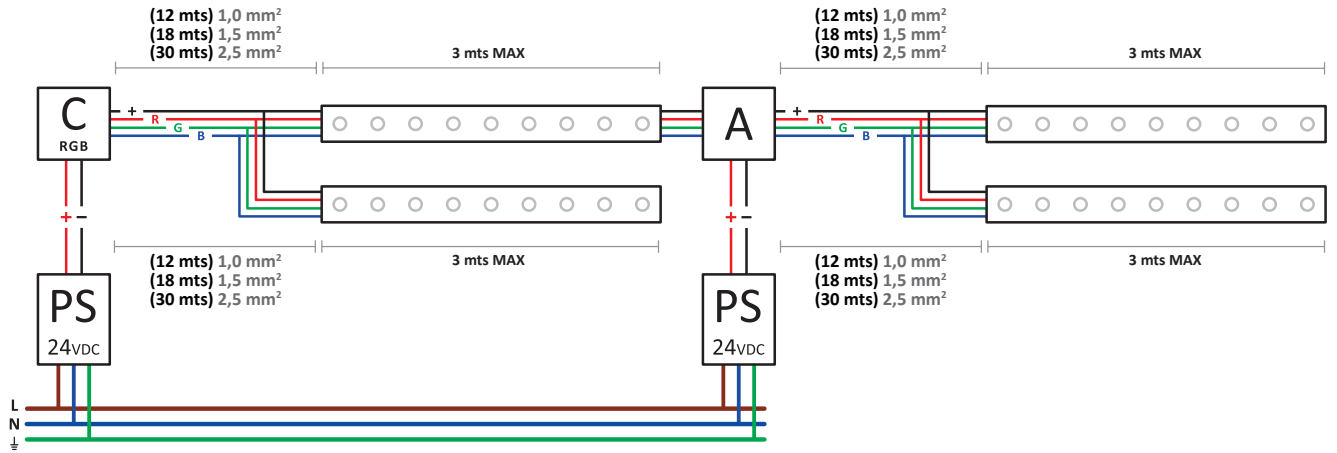

DMX

