


The photograph may not match the reference exactly. Please read the product description to identify the finish.

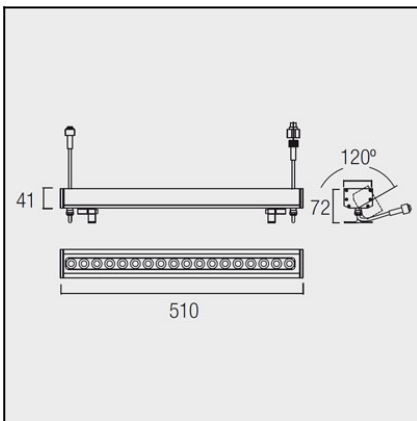


DESCRIPTION

LED floodlight for indoor and outdoor use with 24VDC power supply. Extruded aluminium body, finish in anodized aluminium with UV protected glass included. Unit produces a 25° beam angle, and has 120° vertical rotation. High protection against solid particle and liquid infiltration, high IK. Includes quick installation IP connections.- 0.5m version in two different temperature colours (warm white and cool white), also RGB including 18 LEDs with 18 W power.- 1 metre version in two temperature colours (warm white and cool white) and also in RGB including 36 LEDs with 36 W power.


TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable $\pm 120^\circ$ on the horizontal axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Bulb:	18 x LED Cree. Warm White - 2900K
Power (W):	18
Luminous efficacy (Lm/W):	87,4
Angle Optiques:	25°
Voltage / Frequency:	24 VDC
Warranty (Years):	3
Option to extend the guarantee:	Yes, 5 years
Units per box:	9
Net Weight (Kg):	1.125
EAN:	8435111084946,00

LED Cree Blanco cálido / Warm white - 18w -25°



H (m)	D (m)	Emed (lux)
1	0.37	2318
2	0.75	579
3	1.12	258
4	1.49	145
5	1.87	93



MATERIALS / FINISHES


Structure material:	Silver anodized aluminium	Diffuser material:	UVA glass
Structure finish:	Matt	Diffuser finish:	Transparent

Download photometric file .ldt / .ies

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

71-0017-00-00

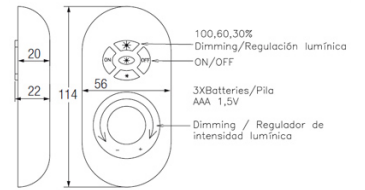


IP20

Luminaria		Ensayo		Lámpara		
Código	05-4667	Código	05-4667	Código	05-4667	
Nombre	Proyector 0.5 mt18 leds blanco	Nombre	Banyador 0.5 mt 18 leds blanco	Número	1	
Familia	- LEDS C4 LEDS	Fecha	05-05-2011	Posición	Universal	
Rendimiento	100.00%	Sist. de Coordin.	C-G	Flujo Total	874.96 lm	
Valor Máximo	3895.31 cd	Posición	C=0.00 G=0.00	Bisimétrico		
Luminaria Rectangular	Longit.	510 mm	Anchura	60 mm	Altura	70 mm
Área Luminosa Rectangular	Longit.	485 mm	Anchura	24 mm	Altura	0 mm
Área Luminosa Horizontal	0.011640 m2	Área Emisión sobre Pl. 180°		0.000000 m2		
Área Emisión sobre Pl. 0°	0.000000 m2	Área Emisión sobre Pl. 270°		0.000000 m2		
Área Emisión sobre Pl. 90°	0.000000 m2	Área de deslumbramiento a 76°		0.002816 m2		
Tipo de Simetría	Bisimétrico	Máximo Ángulo Gamma		90		
Distancia de Ensayo	6.44	Flujo de Ensayo		874.96 lm		
Operador	Asselum T2	Voltaje de la Fuente		230.00 V		
Temperatura	21.00 °C	Corriente de la Fuente		PRC		
Humedad	50.00 %	Fotocélula				
Notas						


Lámparas de la Luminaria					
Familia	Código	Nombre	Flujo/lm	Pot.W	Cant.
- LEDS C4 LEDS	05-4667	Lámpara leds blanco	874.96	30.00	1
C.I.E.	92 97 100 100 100	D DIN 5040			
F UTE	1.00 A	B NBN			
		A60			
		BZ 1			




510mm x 60mm



Semiplanos C
 180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

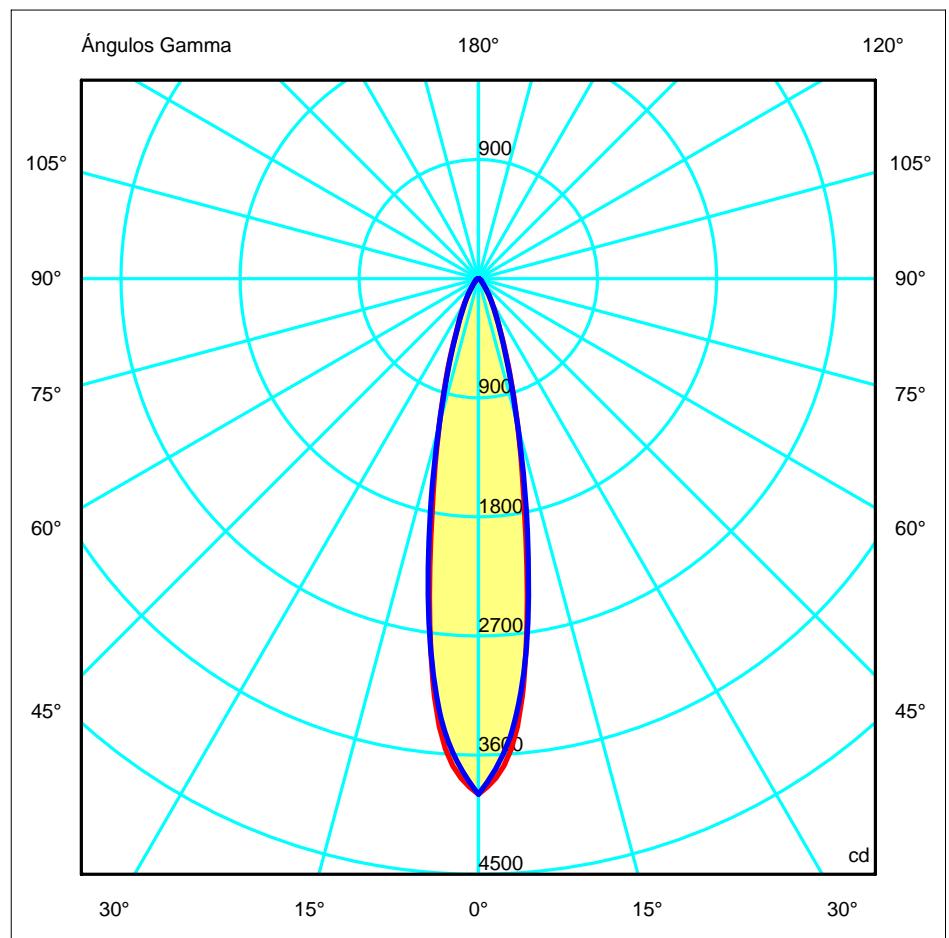

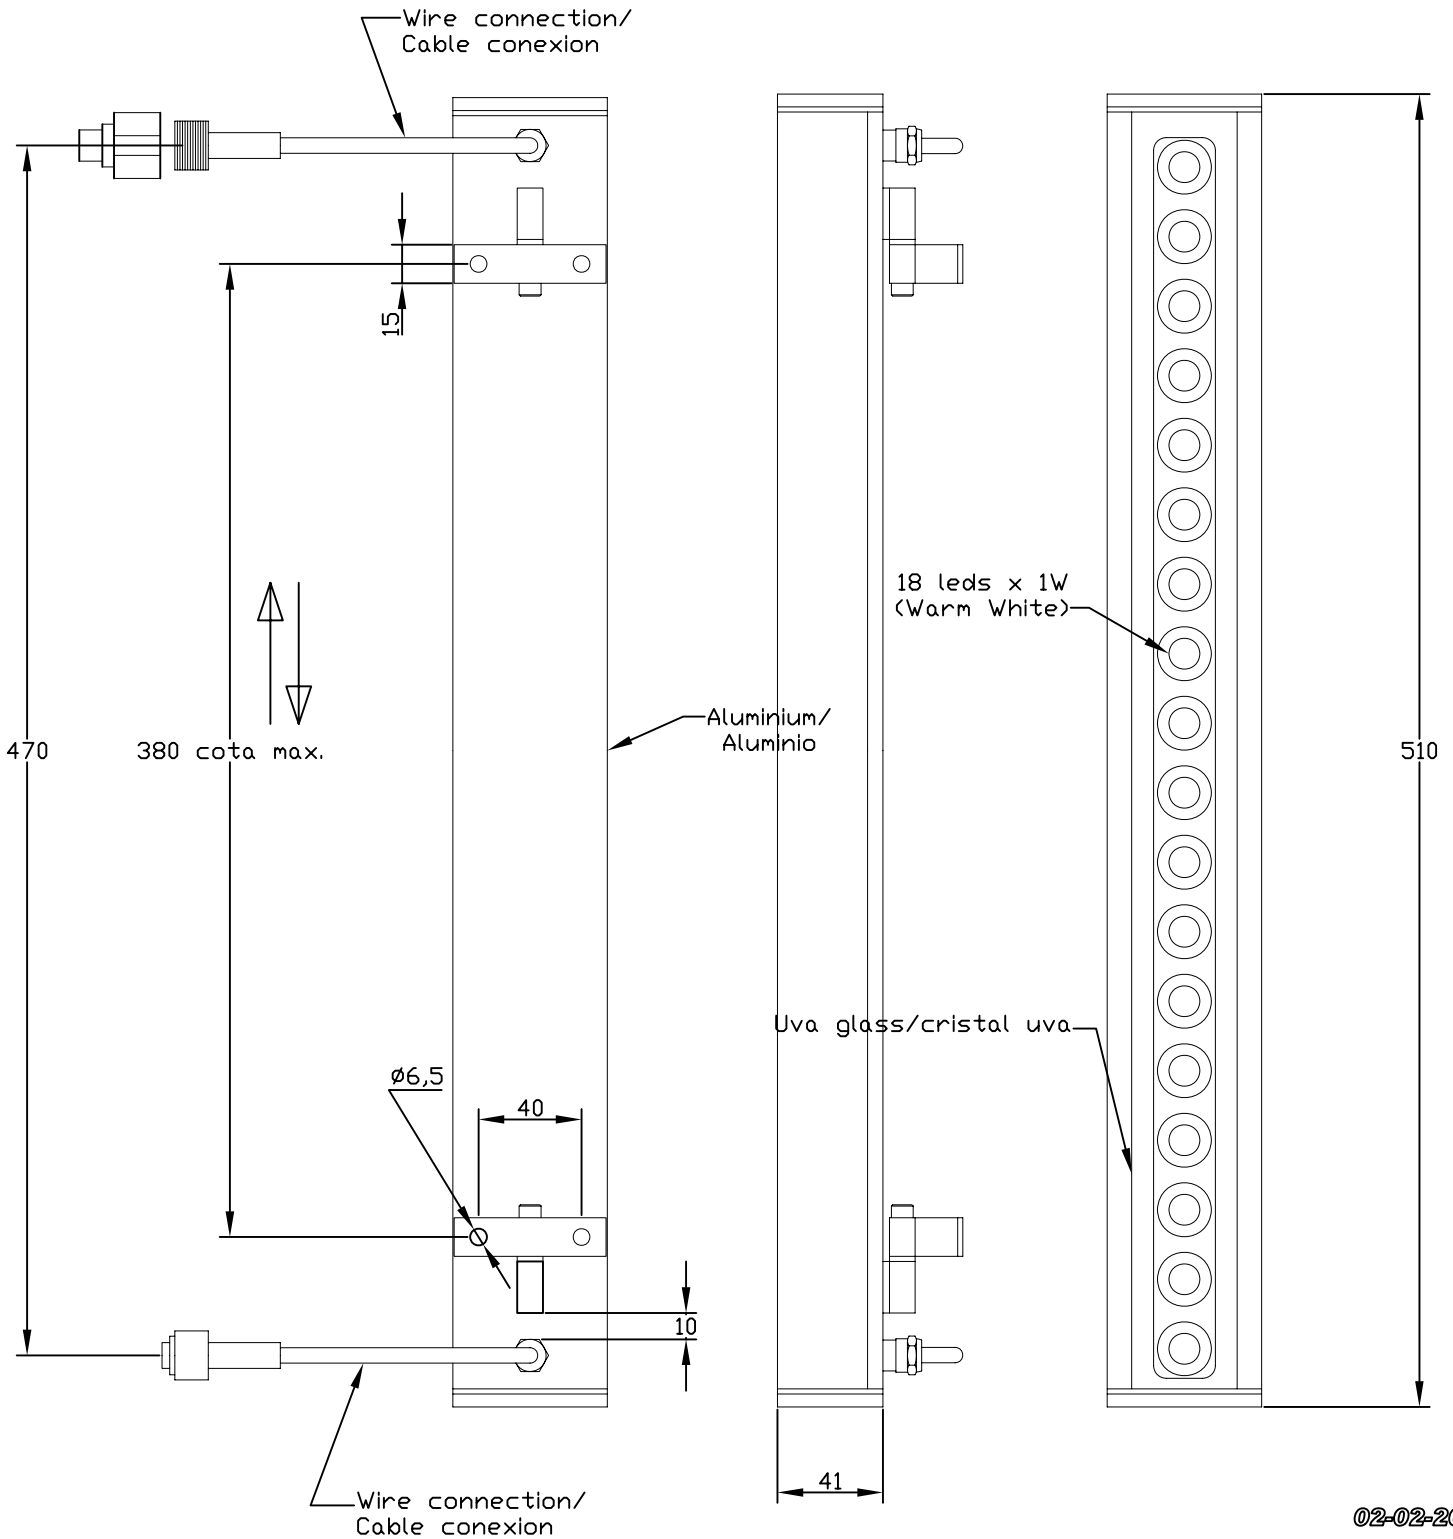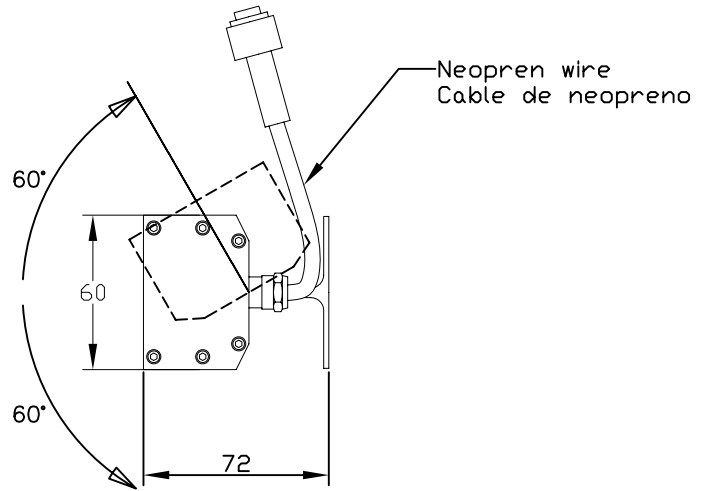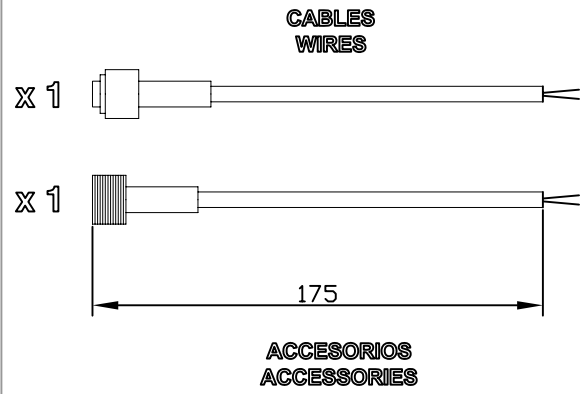



GUIA INSTALCIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-3440-54-H6 / 05-3438-54-H6 - NEUTRAL WHITE








05-4668-54-H6 / 05-4667-54-H6 - WARM WHITE

05-3441-54-H6 / 05-3439-54-H6 - RGB

LEDS-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

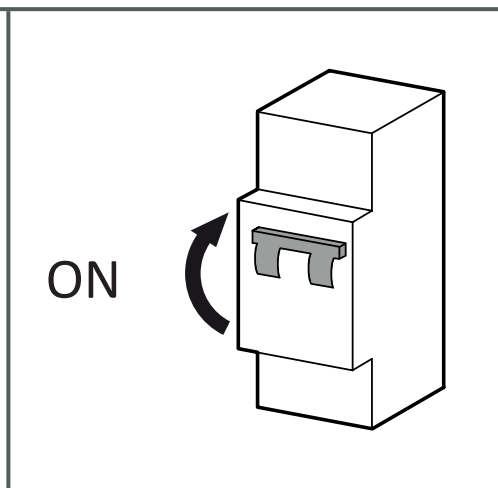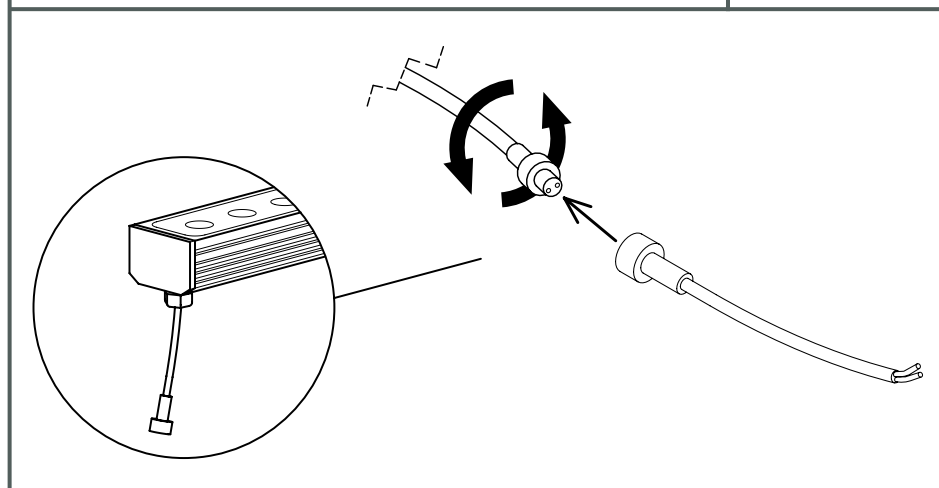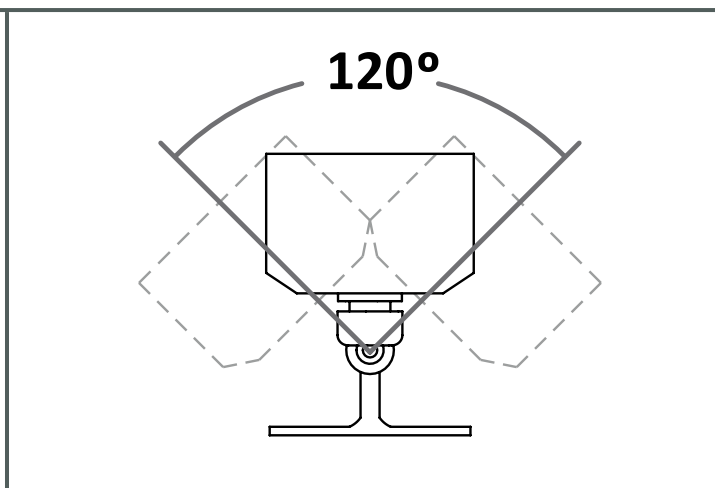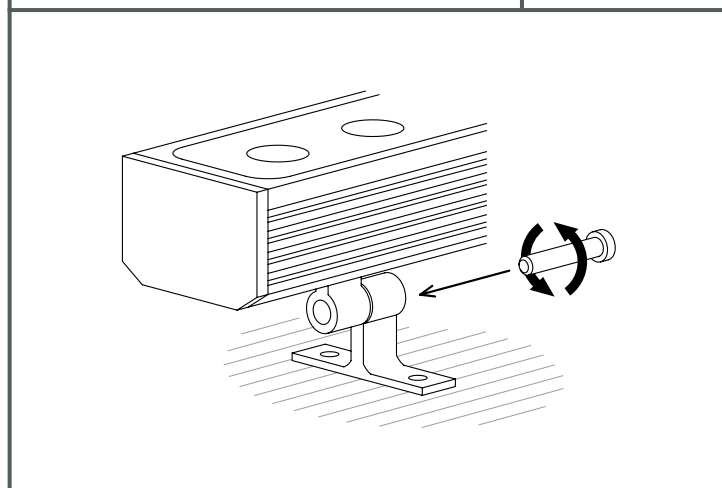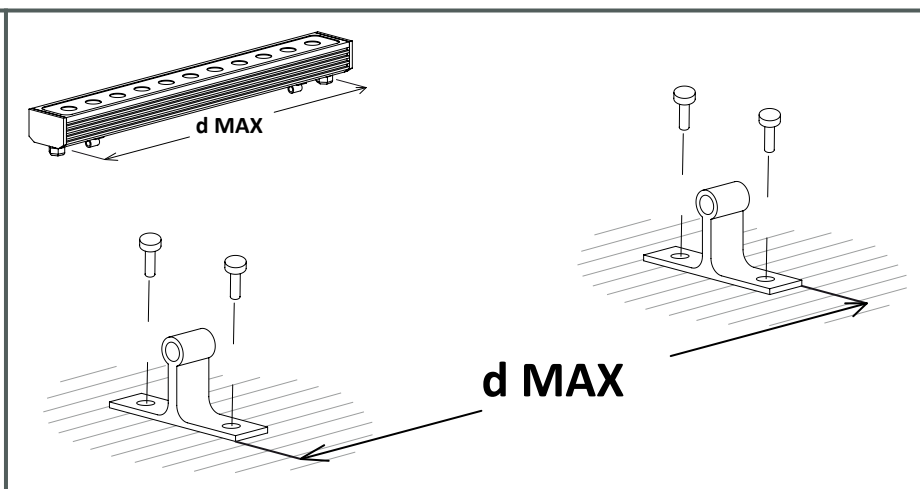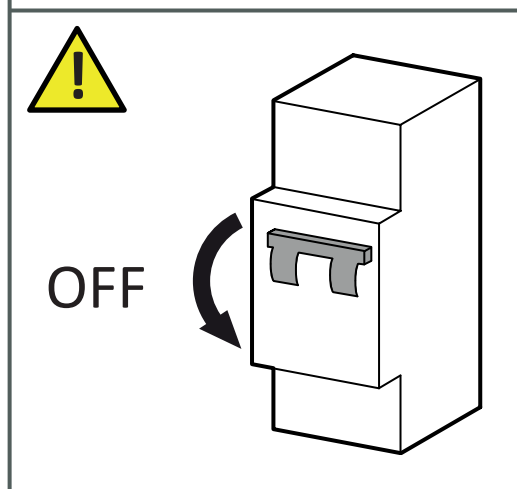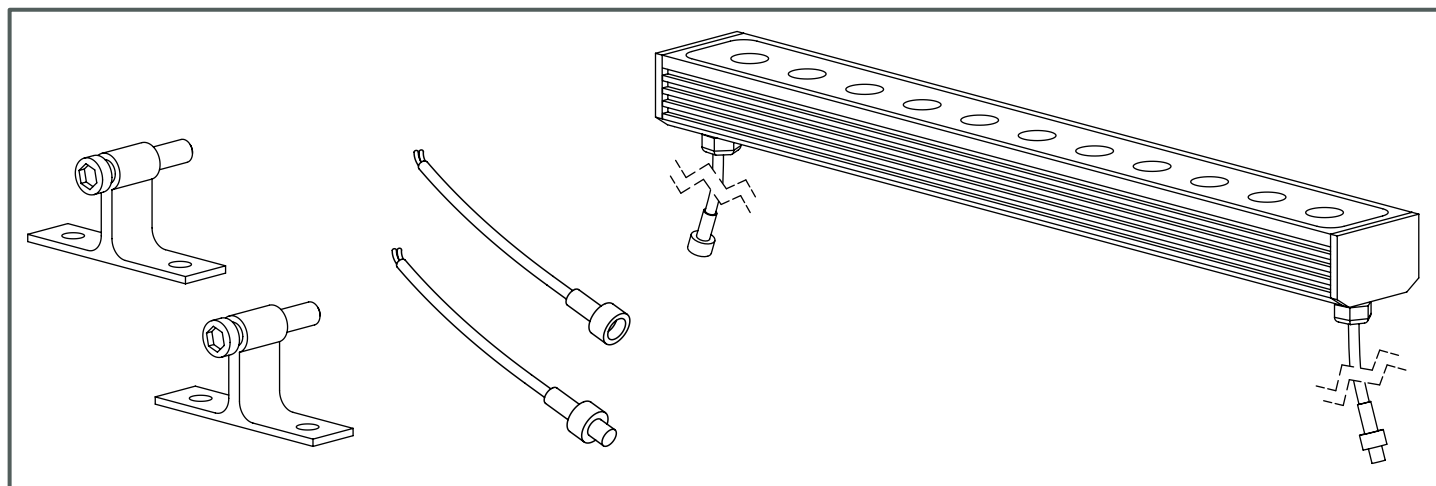

PS
24VDC

71-0038-00-00 - 26,4 W
 71-0039-00-00 - 52,8 W
 71-0063-00-00 - 76,8 W
 71-0064-00-00 - 156 W
 71-0065-00-00 - 240 W
 71-0066-00-00 - 312 W
 71-4727-00-00 - 150 W (IP67)

C
DALI

71-3473-00-00 - 120 W

C
WHITE

71-0017-00-00 - 288 W

C
DMX

71-3493-00-00 - 192 W

C
RGB

71-0019-00-00 - 432 W

A

71-3433-00-00 - 288 W
 71-1553-00-00 - 288 W

C
1-10V

71-0727-00-00 - 312 W

C
RGB


71-4662-00-00 - 432 W
 71-4663-00-00 - 432 W (IP65)
 71-4666-00-00 - REMOTE (OPTIONAL)

WHITE



05-3440-54-H6 / 05-4668-54-H6 (1,0 mt - 36W)

05-3438-54-H6 / 05-4667-54-H6 (0,5 mt - 18W)


ON / OFF

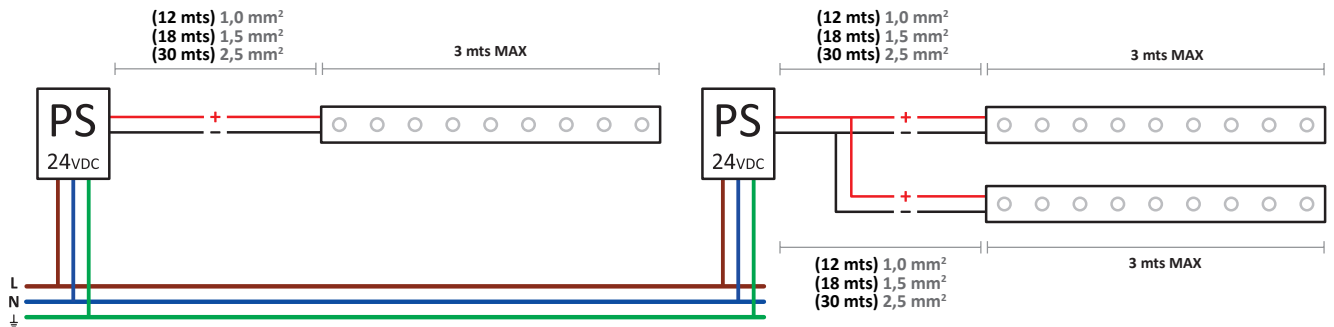


DIMMING WITH REMOTE CONTROL

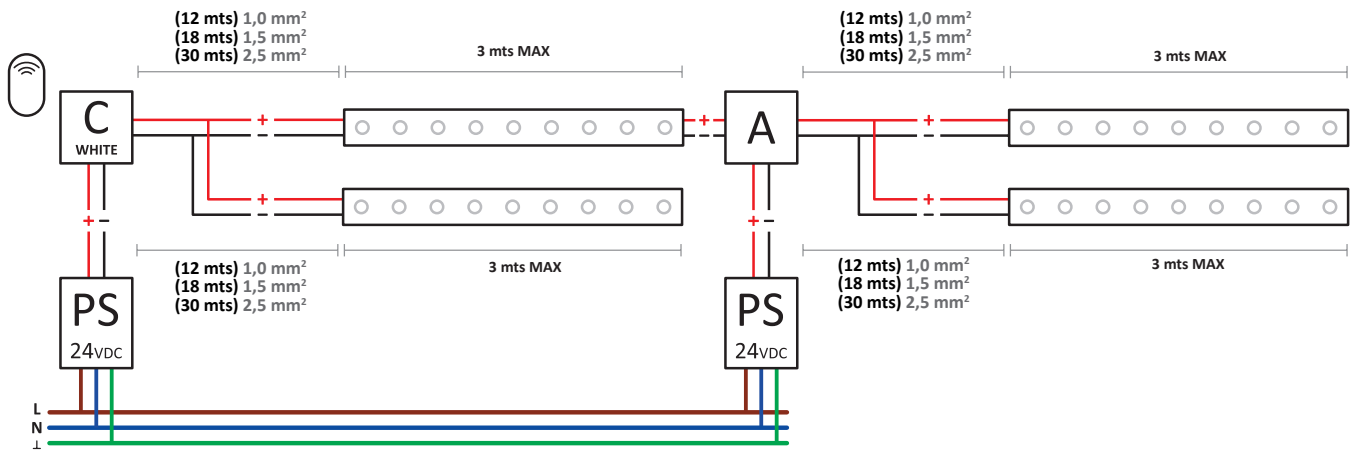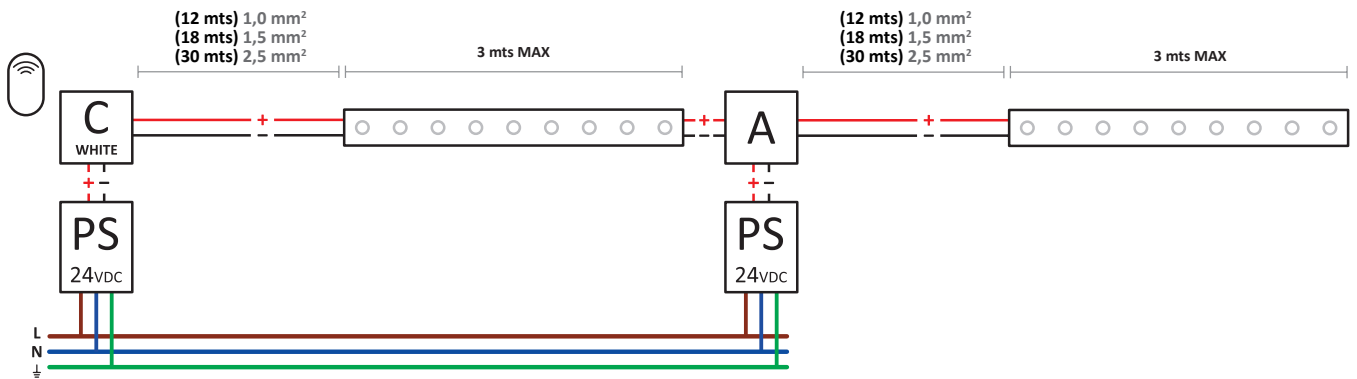

1-10V

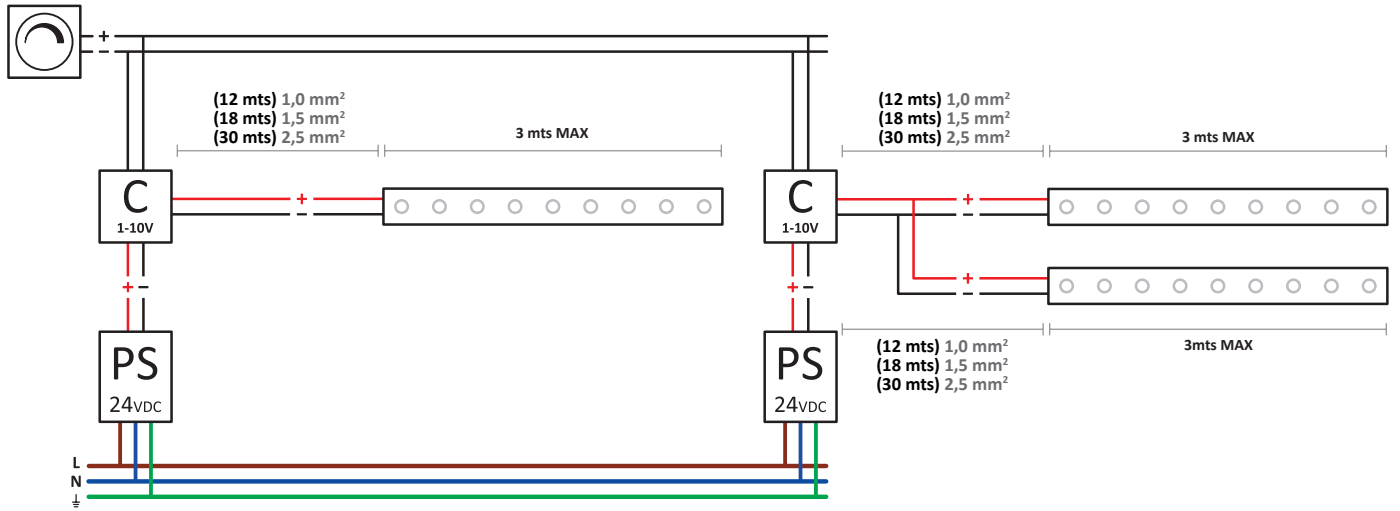

DALI

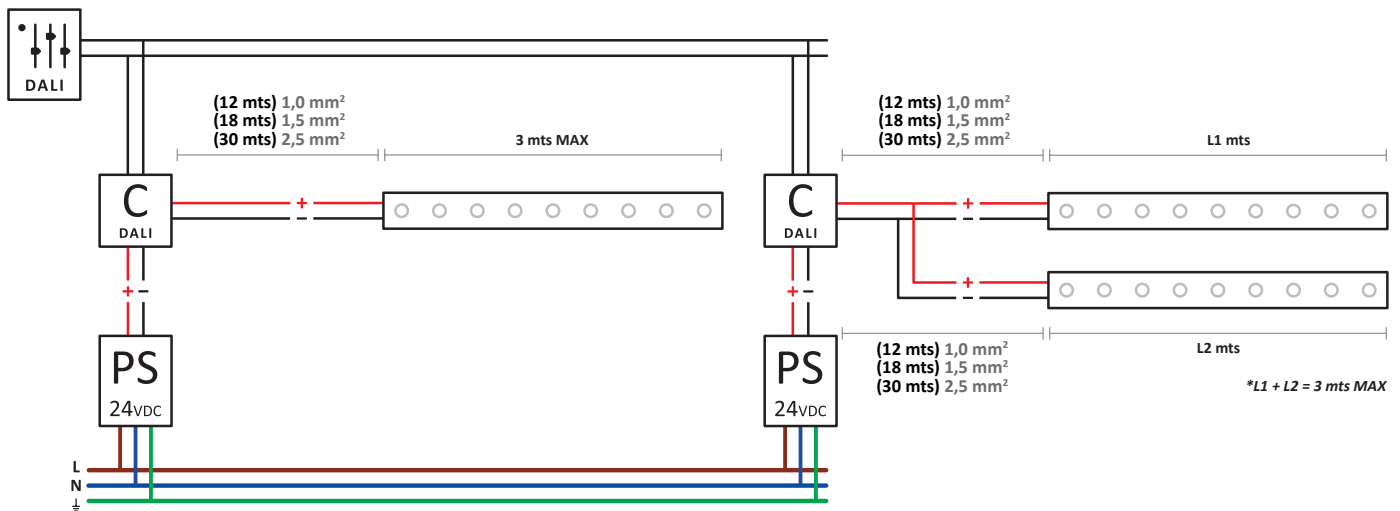



RGB

05-3441-54-H6 (1,0 mt - 36W)

05-3439-54-H6 (0,5 mt - 18W)

RGB CONTROL WITH / WITHOUT REMOTE CONTROL

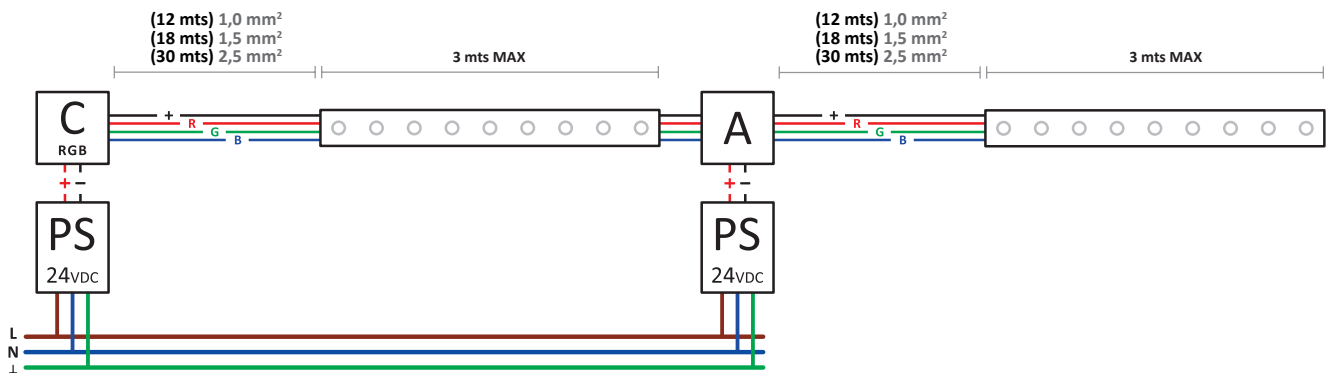

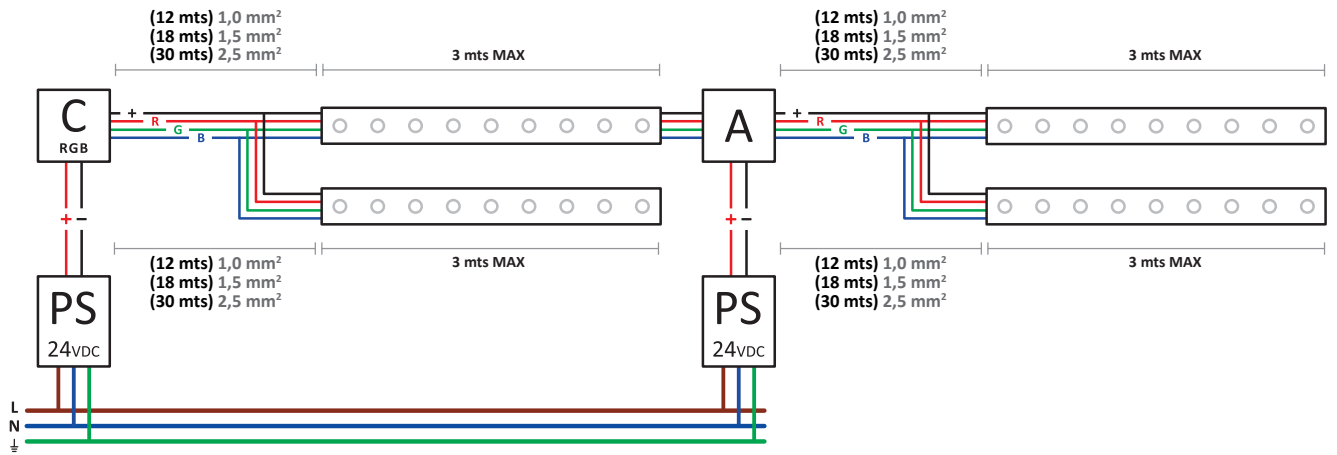

DMX

