


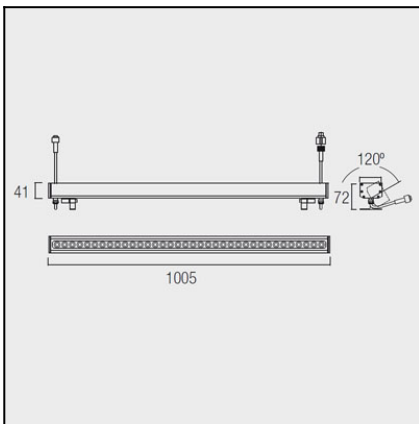

The photograph may not match the reference exactly. Please read the product description to identify the finish.


**TECHNICAL CHARACTERISTICS**

Type:	Spotlight
Adjustable $\pm 120^\circ$ on the horizontal axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Bulb:	36 x LED Cree. Warm White - 2900K
Power (W):	36
Luminous efficacy (Lm/W):	87,4
Angle Óptiques:	25°
Voltage / Frequency:	24 VDC
Warranty (Years):	3
Option to extend the guarantee:	Yes, 5 years
Units per box:	9
Net Weight (Kg):	2.11
EAN:	8435111084953,00






**MATERIALS / FINISHES**

<b>Structure material:</b>	Silver anodized aluminium	<b>Diffuser material:</b>	UVA glass
<b>Structure finish:</b>	Matt	<b>Diffuser finish:</b>	Transparent

**GEAR**

Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt / .ies

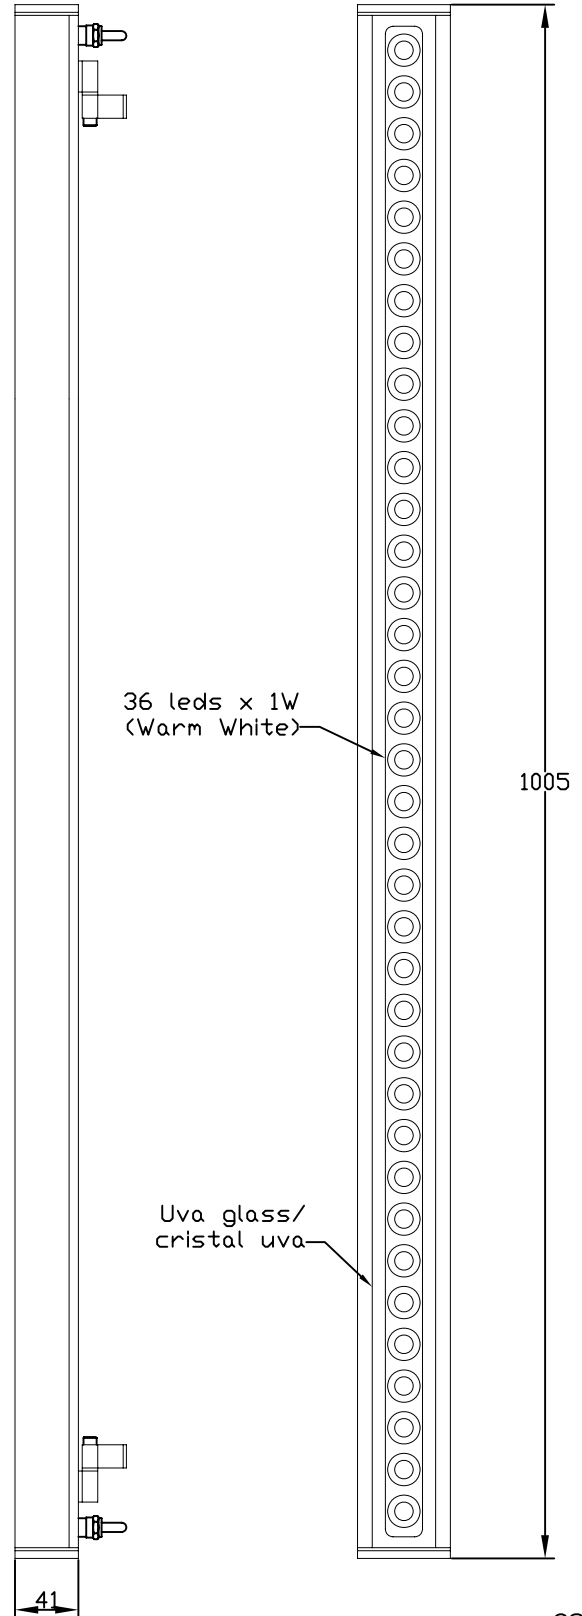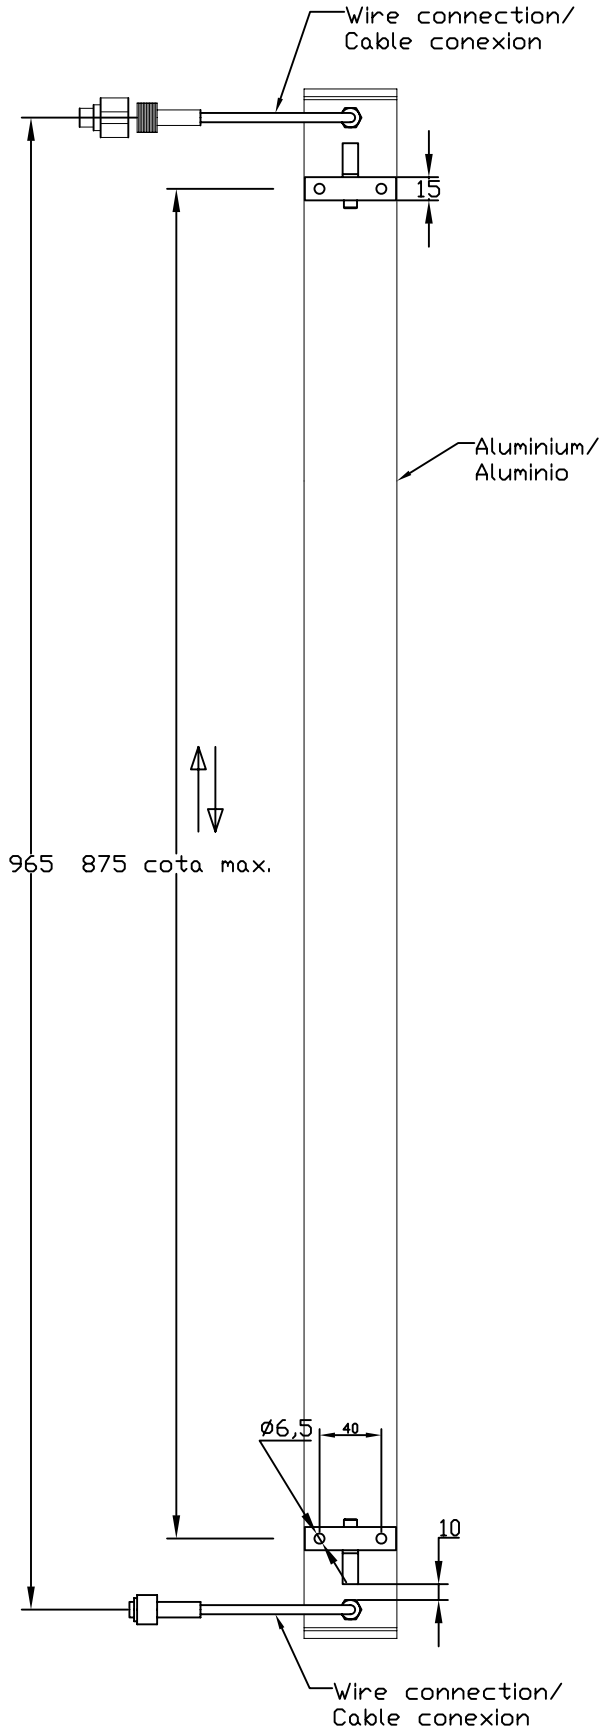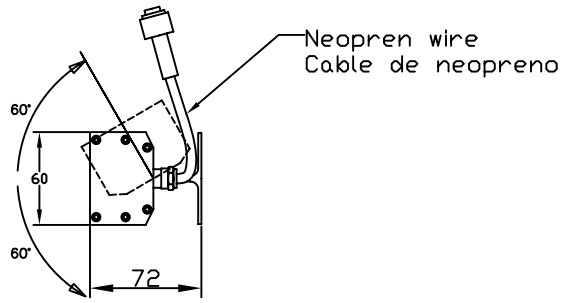



**GUIA INSTALCIÓN SERIE TRON**  
**INSTALLATION GUIDE TRON SERIES**  
**INSTALLATIONSANLEITUNG SERIE TRON**  
**GUIDE D'INSTALLATION SÉRIE TRON**  
**GUIDA DI INSTALLAZIONE SERIE TRON**

**05-3440-54-H6 / 05-3438-54-H6 - NEUTRAL WHITE**








**05-4668-54-H6 / 05-4667-54-H6 - WARM WHITE**

**05-3441-54-H6 / 05-3439-54-H6 - RGB**

**LEDS-C4 S.A.**  
**CIF A-59410910**

**Afores, s/n**  
**25750 Torà · Lleida · Spain**  
**T +34 973 46 81 00**  
**F +34 973 46 81 06**  
**e-mail: leds-c4@leds-c4.com**

**WWW.LEDS-C4.COM**

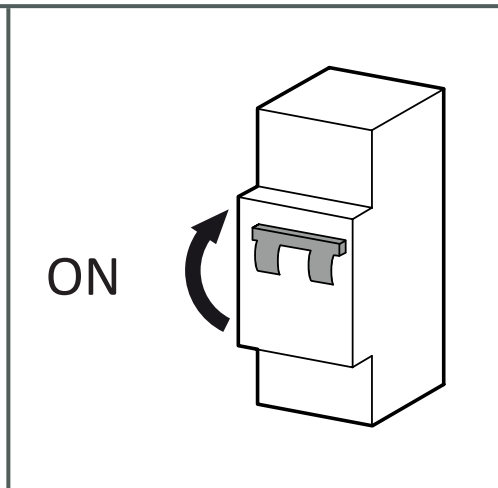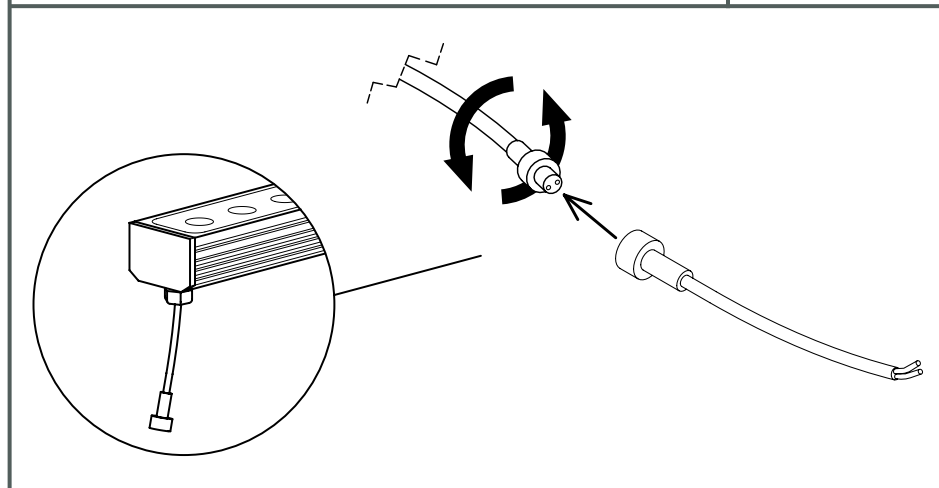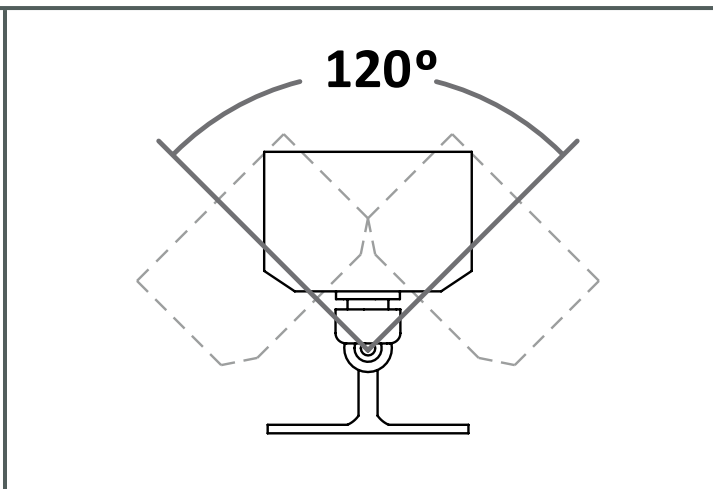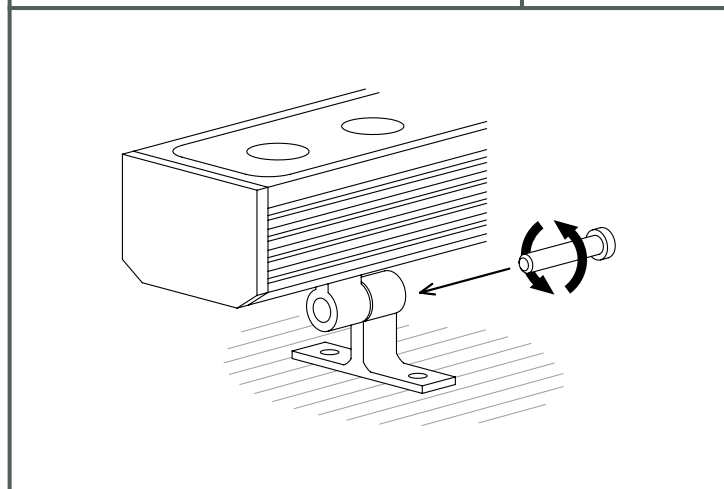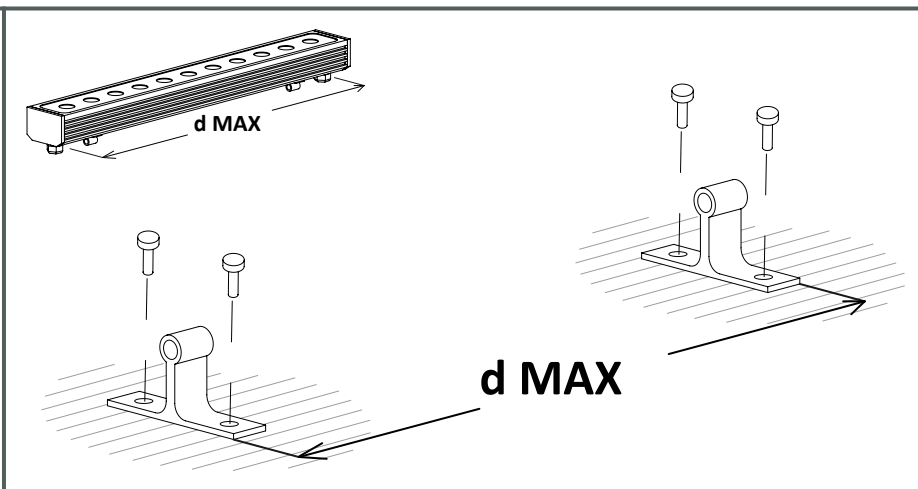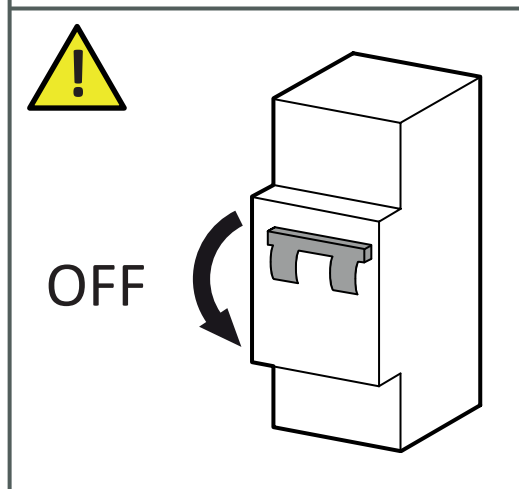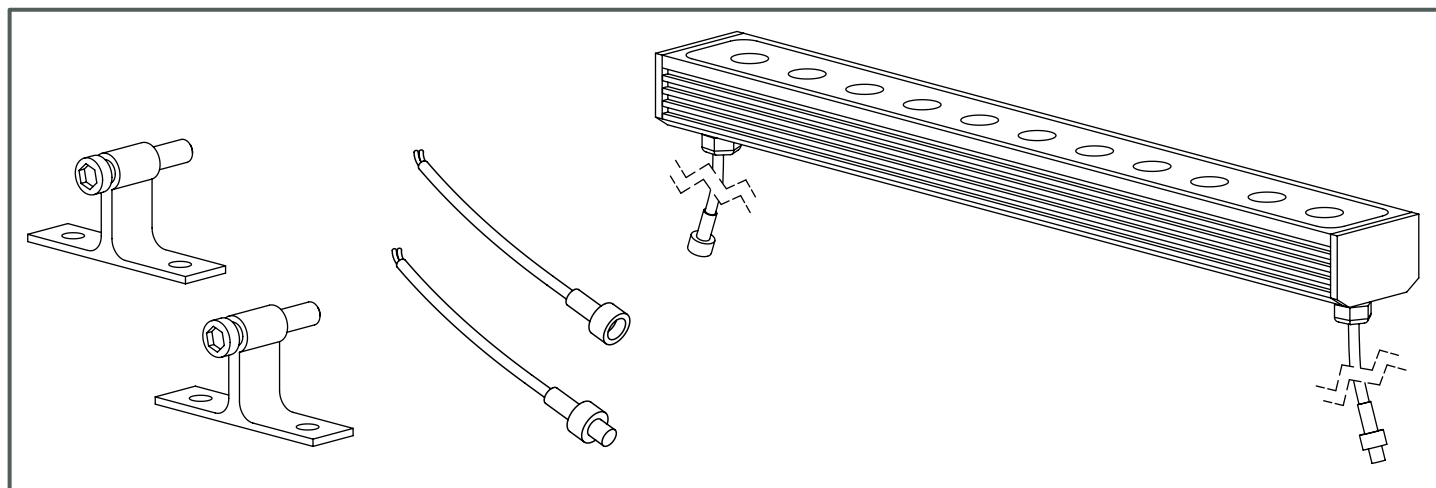

**PS**  
24VDC

71-0038-00-00 - 26,4 W  
 71-0039-00-00 - 52,8 W  
 71-0063-00-00 - 76,8 W  
 71-0064-00-00 - 156 W  
 71-0065-00-00 - 240 W  
 71-0066-00-00 - 312 W  
 71-4727-00-00 - 150 W (IP67)

**C**  
DALI

71-3473-00-00 - 120 W

**C**  
WHITE

71-0017-00-00 - 288 W

**C**  
DMX

71-3493-00-00 - 192 W

**C**  
RGB

71-0019-00-00 - 432 W

**A**

71-3433-00-00 - 288 W  
 71-1553-00-00 - 288 W

**C**  
1-10V

71-0727-00-00 - 312 W

**C**  
RGB


71-4662-00-00 - 432 W  
 71-4663-00-00 - 432 W (IP65)  
 71-4666-00-00 - REMOTE (OPTIONAL)

## WHITE



05-3440-54-H6 / 05-4668-54-H6 (1,0 mt - 36W)

05-3438-54-H6 / 05-4667-54-H6 (0,5 mt - 18W)


### ON / OFF

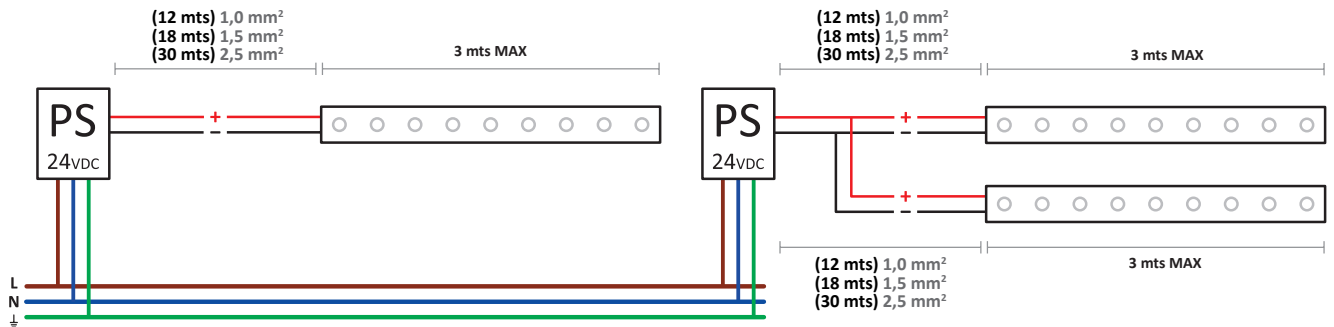


### DIMMING WITH REMOTE CONTROL

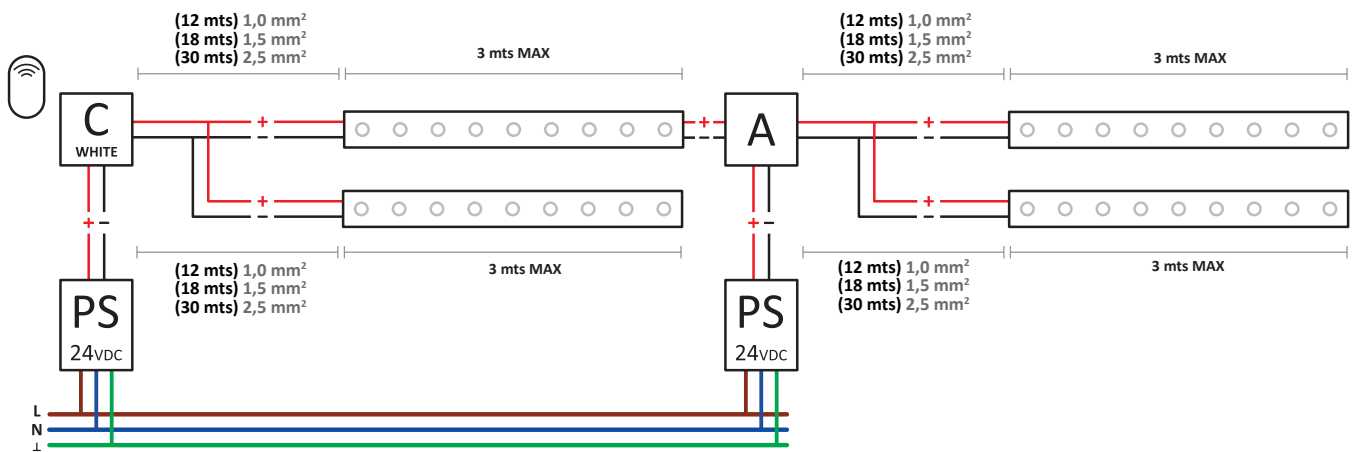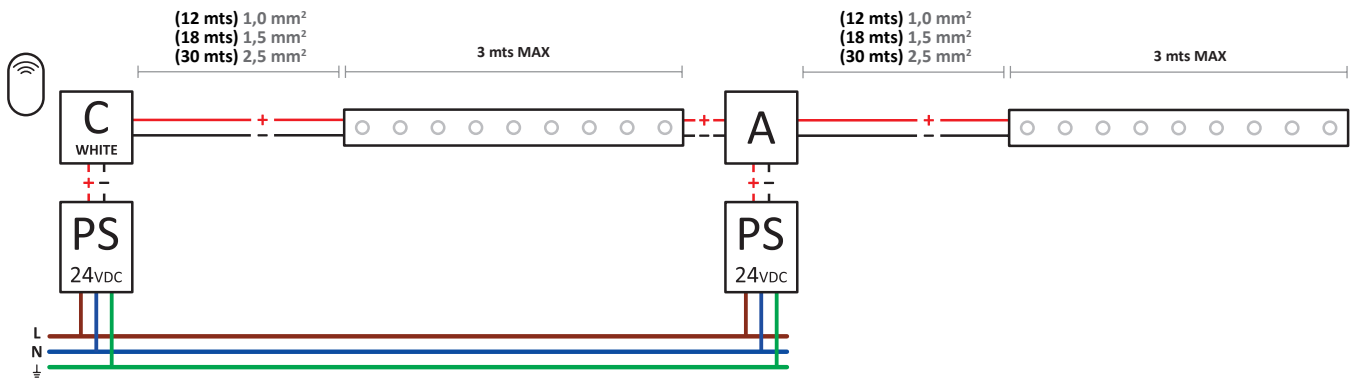

**1-10V**

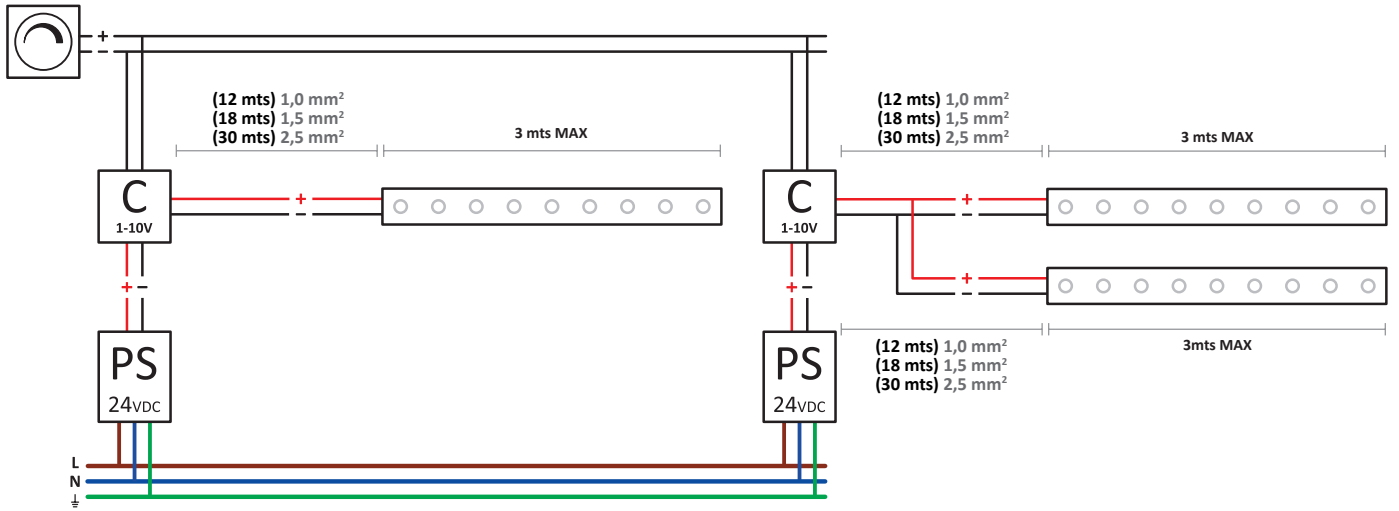

**DALI**

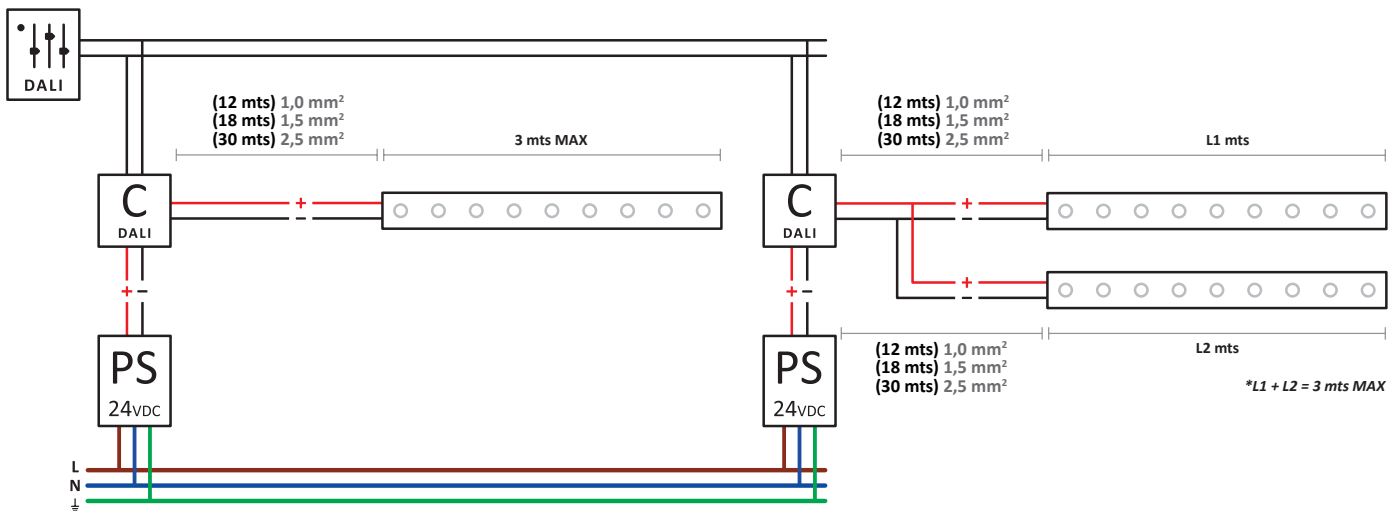



**RGB**

05-3441-54-H6 (1,0 mt - 36W)

05-3439-54-H6 (0,5 mt - 18W)

**RGB CONTROL WITH / WITHOUT REMOTE CONTROL**

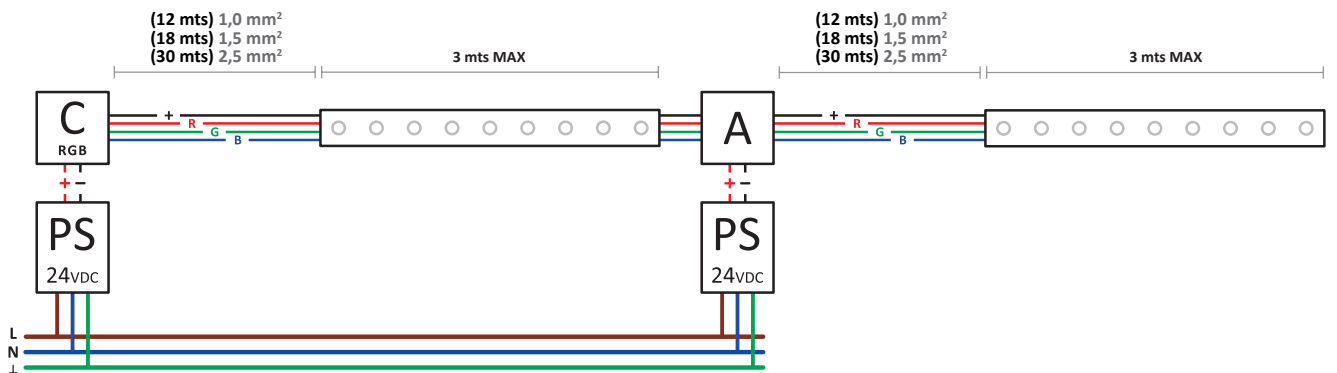

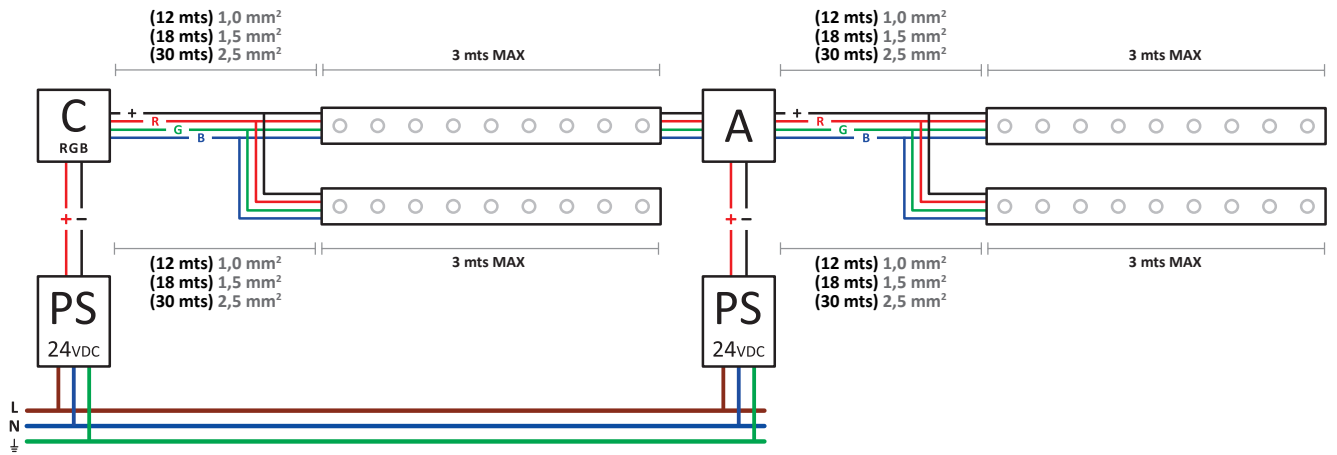

DMX

