


Design by Nahtrang Design



The photograph may not match the reference exactly. Please read the product description to identify the finish.

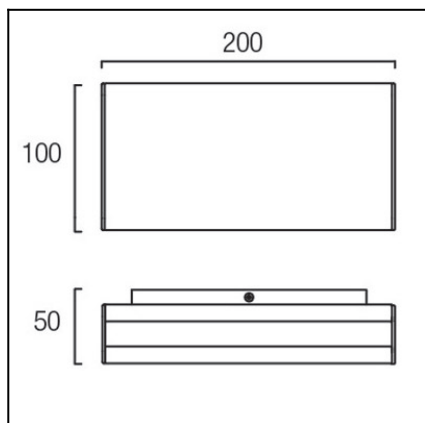

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Bulb:	12 x LED Cree. Warm White - 3000K
Power (W):	12x1W
Total power consumption (W):	18.5
Luminous efficacy (Lm/W):	80,6
LED lifetime (h):	50.000
Voltage / Frequency:	100-240V/50-60Hz
Possibilitat extensió garantia:	Si, 5 anys
Units per box:	7
Net Weight (Kg):	0.68
EAN:	8435111090862



MATERIALS / FINISHES

Structure material: Aluminium Steel	Diffuser material: Polystyrene
Structure finish: Metallic grey	Diffuser finish: Tinted


GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Luminaire			Measur.			Lamp		
Code	05-4719-AH-M3		Code	05-4719-AH-M3		Code	05-4719-AH-M3	
Name	Aplique LINE leds 12x1W		Name	Aplique LINE 12 leds x 1W		Number	1	
Line	- LEDS C4 LEDS		Date	14-03-2013		Position	Universal	
Efficiency			100.00%	Coordinate system		CG	Total Flux	302.83 lm
Maximum value			69.90 cd	Position		C=90.00 G=10.00	Asymmetrical	
Rectangular Luminaire			Length	50 mm	Width	200 mm	Height	100 mm
Rectangular Luminous Area			Length	16 mm	Width	195 mm	Height	100 mm
Horizontal Luminous Area			0.003120 m2		Emitting area on Plane 180°		0.001600 m2	
Emitting area on Plane 0°			0.001600 m2		Emitting area on Plane 270°		0.019500 m2	
Emitting area on Plane 90°			0.019500 m2		Glare area at 76°		0.002307 m2	
Symmetry Type			Asymmetrical		Maximum Gamma Angle		180	
Measurement Distance			6.44		Measurement Flux		302.83 lm	
Operator			Asselum T2		Source voltage		230.00 V	
Temperature			20.00 °C		Source current		PRC	
Humidity			49.00 %		Photocell			
Notes								

Line						Luminaire Lamps			
- LEDS C4 LEDS						Name	Flux [lm]	Pow. [W]	Q.ty
						Lámpara led blanco càido12x1W	302.83	12.00	1
						D DIN 5040	C41		
						B NBN	BZ 3 / 2.5 / BZ 4		


50mm x 200mm






C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %


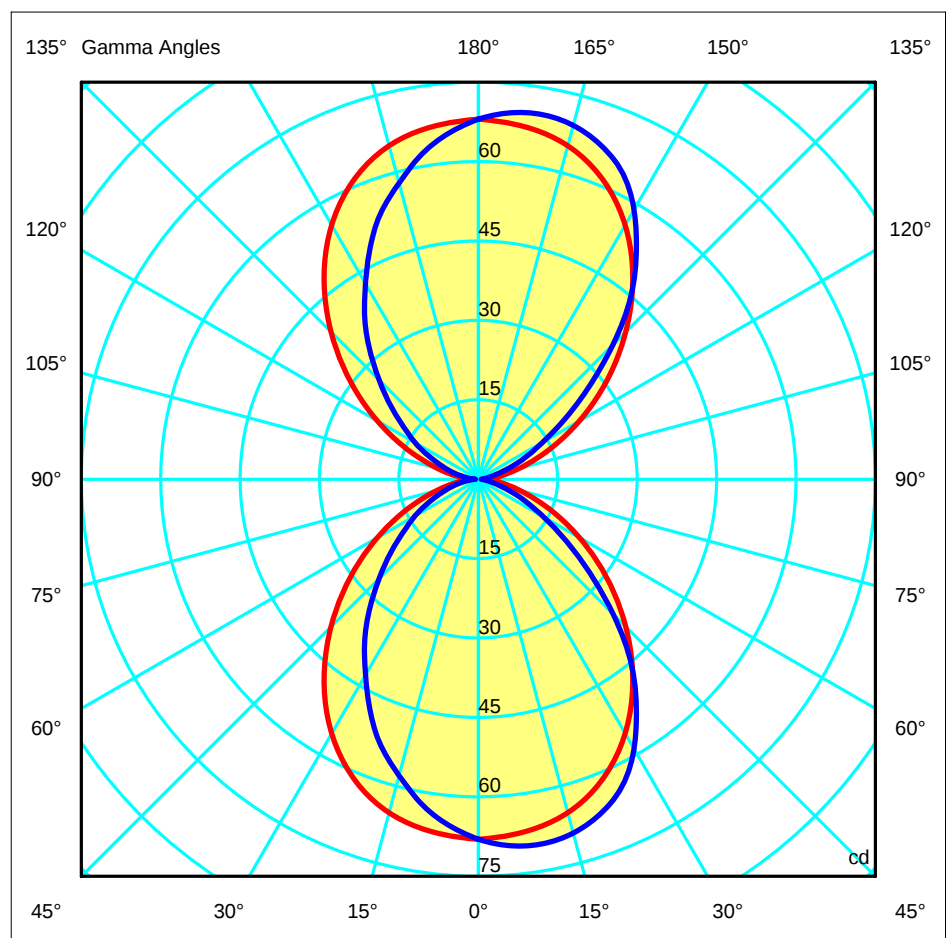


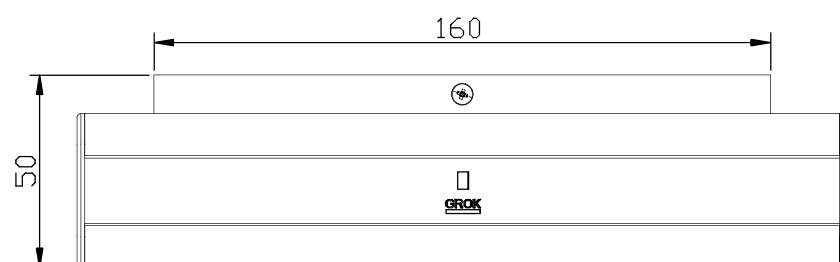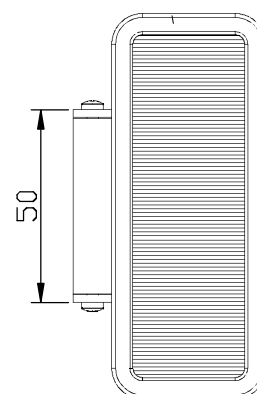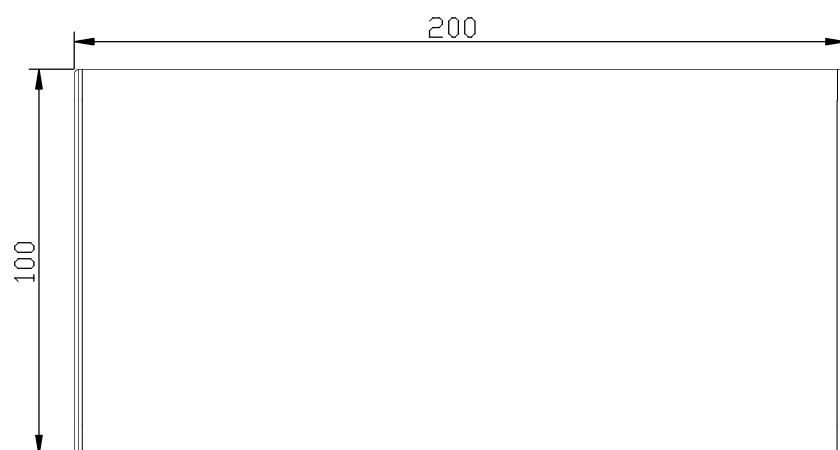

aluminum(white/grey) /
aluminio (blanco/gris)


polystyrene (frosted) /
poliestireno (arenado)

aluminum (grey) /
aluminio (gris)

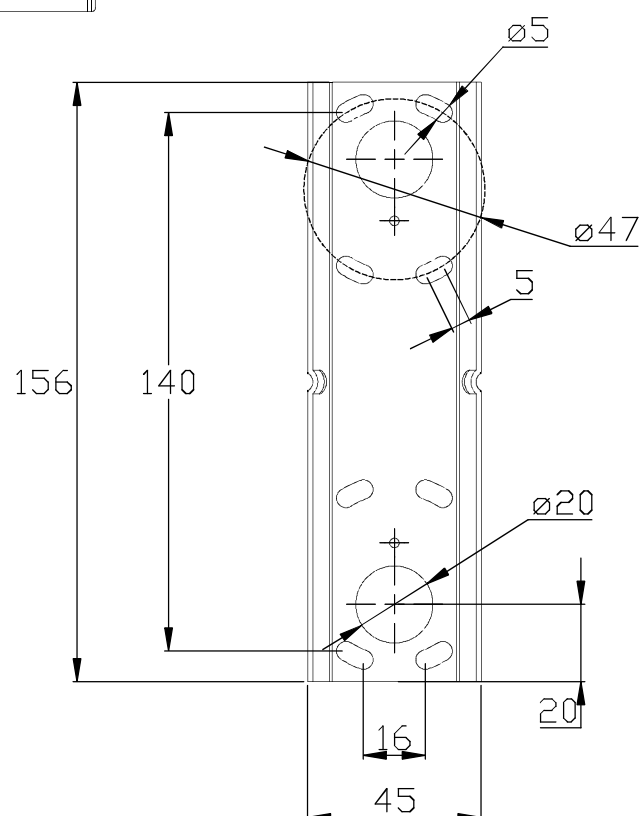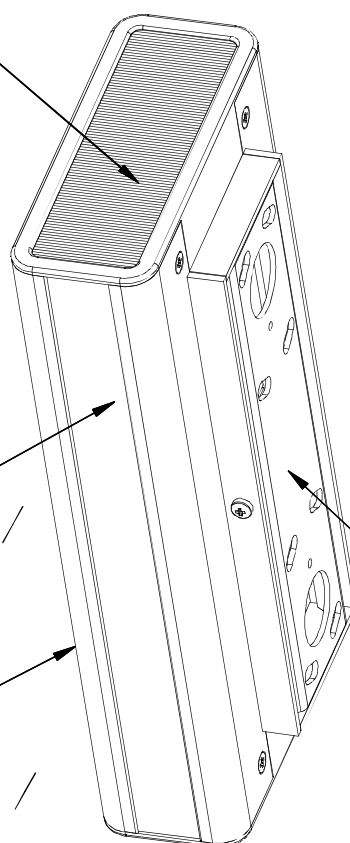


iron (grey) /
acero (gris)


1

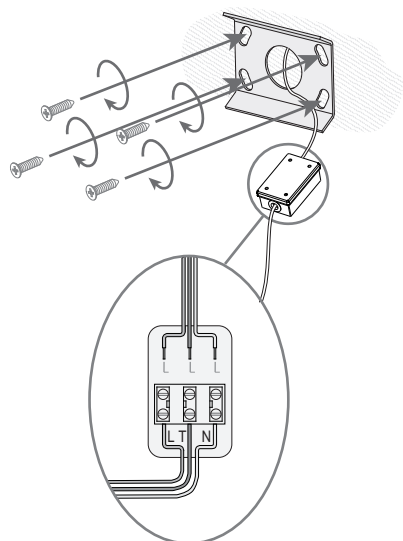


2A

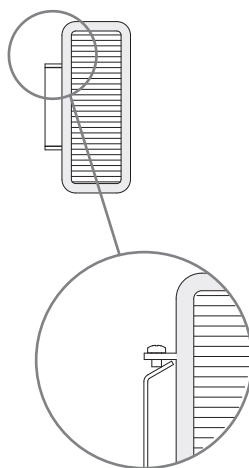


2B

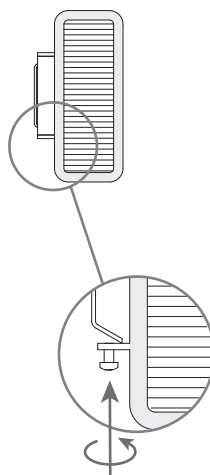


3




4

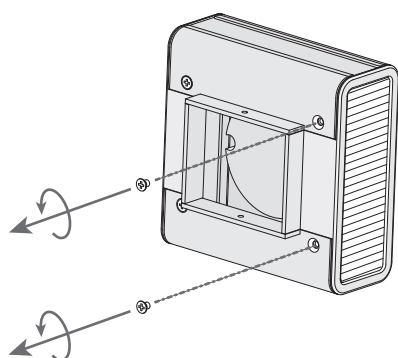


5

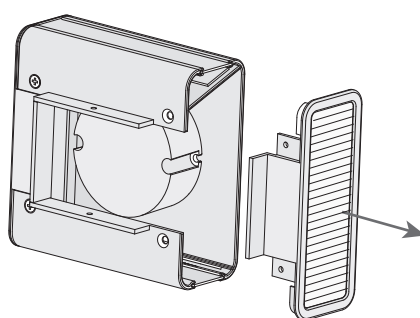


6



7



8

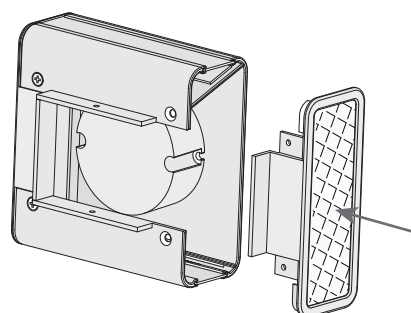

9

