





The photograph may not match the reference exactly. Please read the product description to identify the finish.

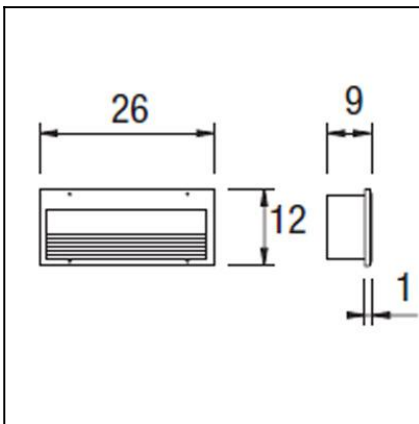

### TECHNICAL CHARACTERISTICS

Type:	Downlight
IP Protection degrees:	IP44
IK Protection degrees:	IK06
Lampholder:	1 x G24d3
Power (W):	G24d3 26W
Total power consumption (W):	33.4
Voltage / Frequency:	230V/50Hz
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	1.41
EAN:	8435111044629,00




### MATERIALS / FINISHES

**Structure material:** Injected aluminium  
**Structure finish:** Grey

**Diffuser material:** Glass  
**Diffuser finish:** Matt

### GEAR

Gear included: Yes, Magnetic



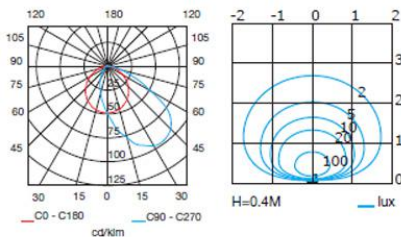



Download photometric file .ldt / .ies

<b>Luminaria</b>		<b>Ensayo</b>		<b>Lámpara</b>	
Código	05-9179-34-B8	Código	05-9179-34-B8	Código	DULUX D 26W840
Nombre	Aplicador indir. 26W TC-D G24d3	Nombre	Aplicador indir. 26W TC-D G24d3	Número	1
Familia	- LEDS-C4	Fecha	11-11-2008	Posición	Universal
Eficiencia	16.07%	Sist. de Coorden.	C-G	Flujo Total	1800.00 lm
Valor Máximo	98.32 cd/klm	Posición	C=90.00 G=35.00	Sim. en los planos	270-90

120mm x 265mm


Semiplanos C

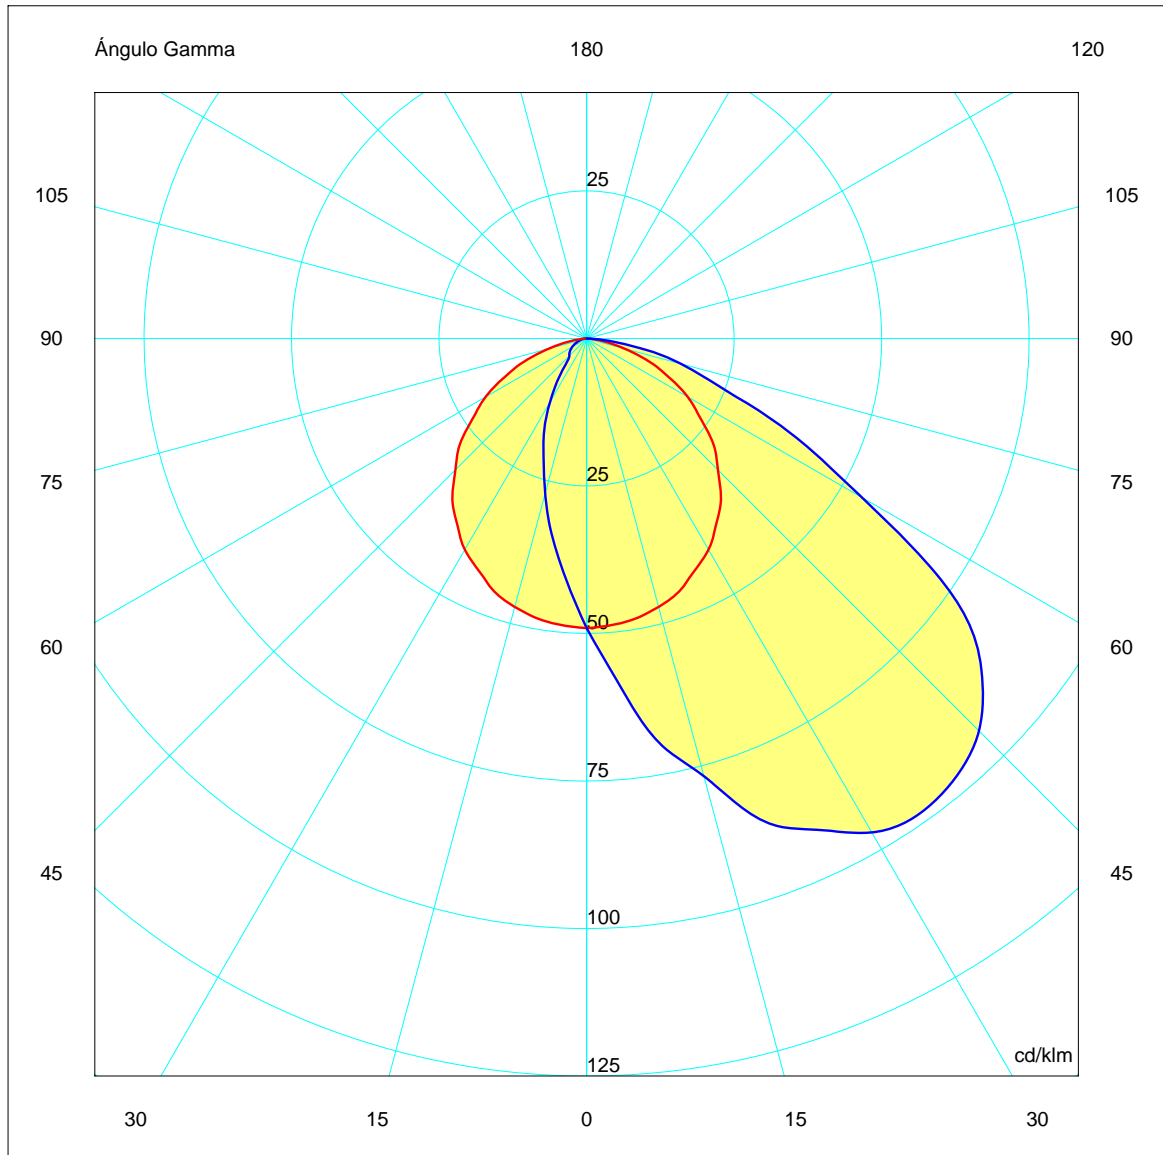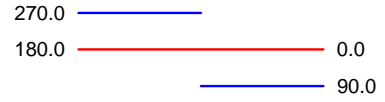

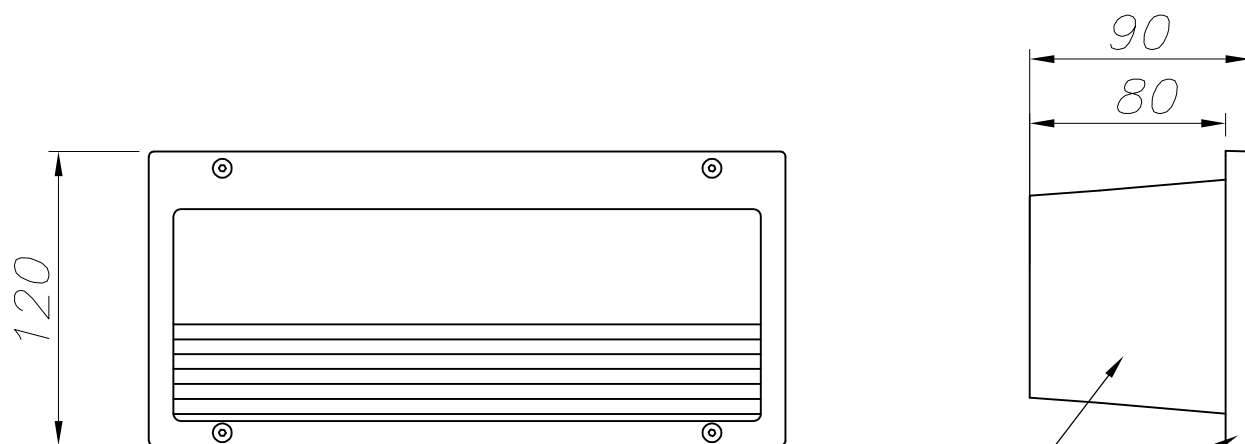


ALUMINIO INYECTADO  
INJECTED ALUMINUM

CAJA DE EMPOTRAR DE PP  
PP FLUSH FITTING BOX

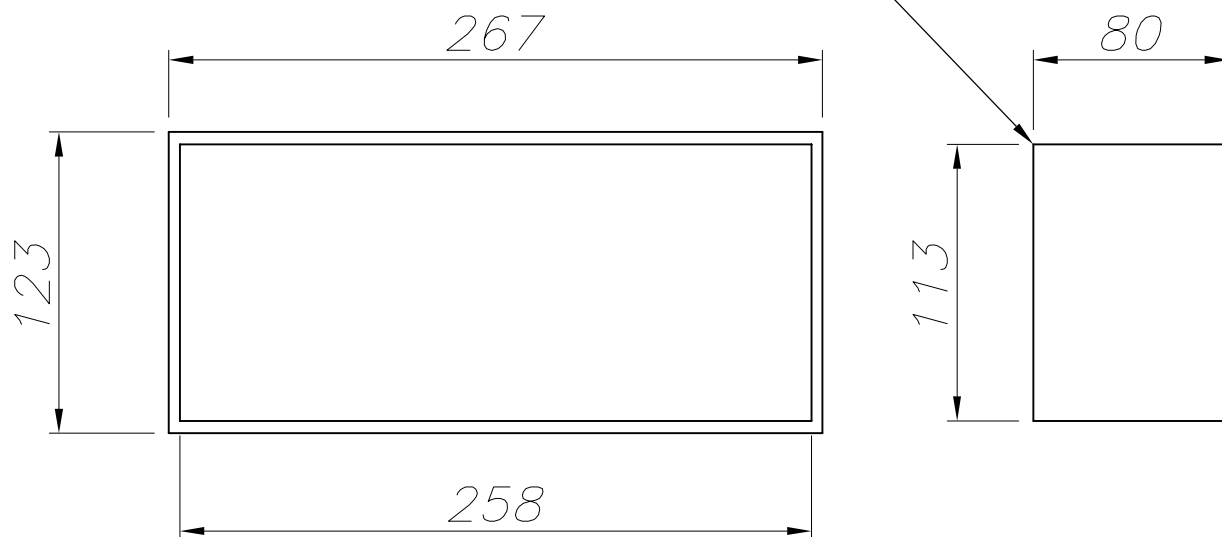


CAJA DE EMPOTRAR  
FLUSH FITTING BOX


①

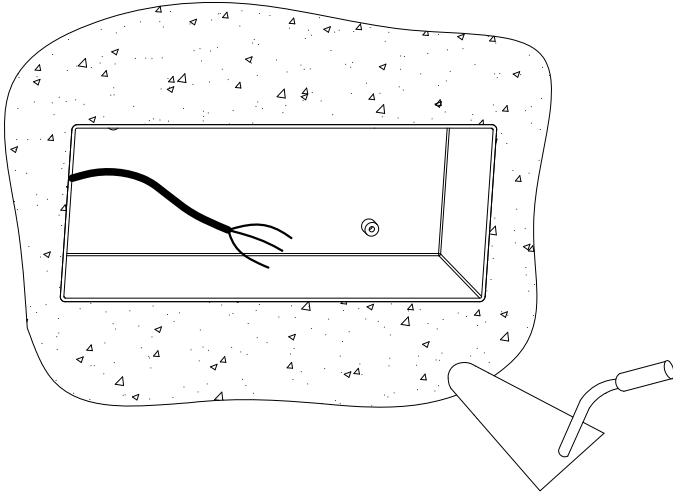

②

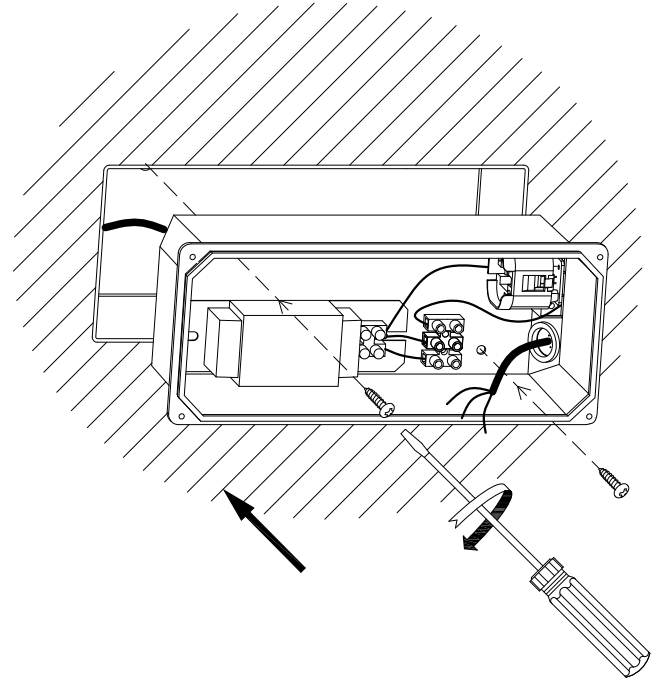

③

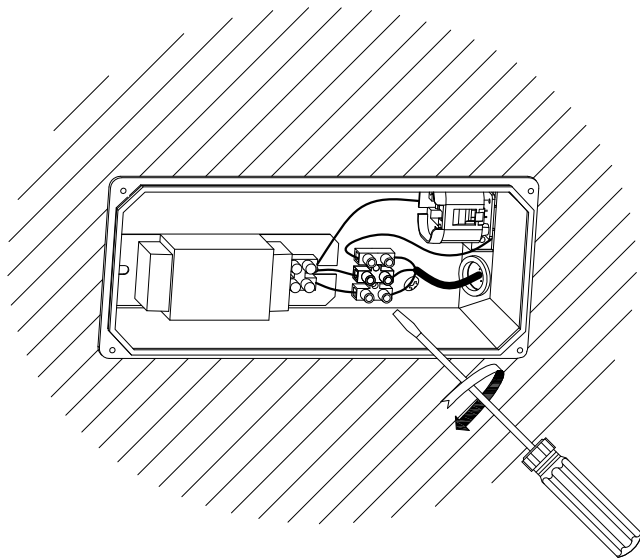

④

