





The photograph may not match the reference exactly. Please read the product description to identify the finish.

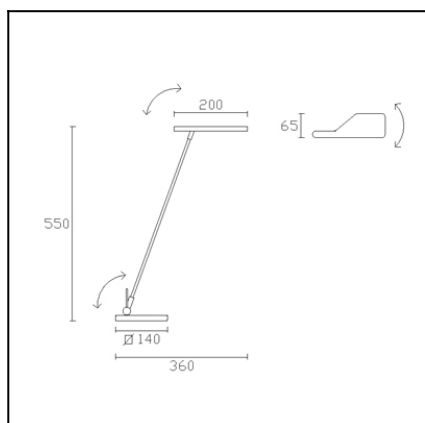

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Table lamp
IP Protection degrees:	IP20
Bulb:	1 x LED Citizen. Warm White - 3000K
Power (W):	6
Total power consumption (W):	8
Luminous efficacy (Lm/W):	72
CRI:	80
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	6
Net Weight (Kg):	1.95
EAN:	8435111098240,00
Stability:	>15°



MATERIALS / FINISHES

Structure material: Aluminium
Steel

Structure finish: Chrome

GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Report No.: 10-1523

Test Time: 2012-12-7 09:31

Luminaire Property

Luminaire Manufacturer: LEDS-C4
Luminaire Category: 10-1523
Lamp Catalog: LED
Number of Lamps: 1
Luminous Length (mm): 360 mm
Luminous Height (mm): 550 mm
Current: 0.093 A
Power Factor: 0.431

Luminaire Description: ELVA
Lamp Description: 1X3W
Lumens per Lamp: 390.0 lm
Luminous Width (mm): 140 mm
Voltage: 220.7 V
Power: 8.90 W

Photometric Results


CIE Class: Direct
Measurement Flux: 301.1 lm
Downward Ratio: 77.21%
Field Angle: H147.2 V152.7
Luminaire Efficacy Rating (LER): 34
Max. Intensity: 132.84 cd

Total Rated Lamp Lumens: 390.0 lm
Efficiency: 77.21%
Upward Ratio: 0.00%
Beam Angle: H95.7 V96.3
Central Intensity: 129.36 cd
Pos of Max. Intensity: H90 V3

Picture Of Luminaire



Luminous Intensity Distribution Curve

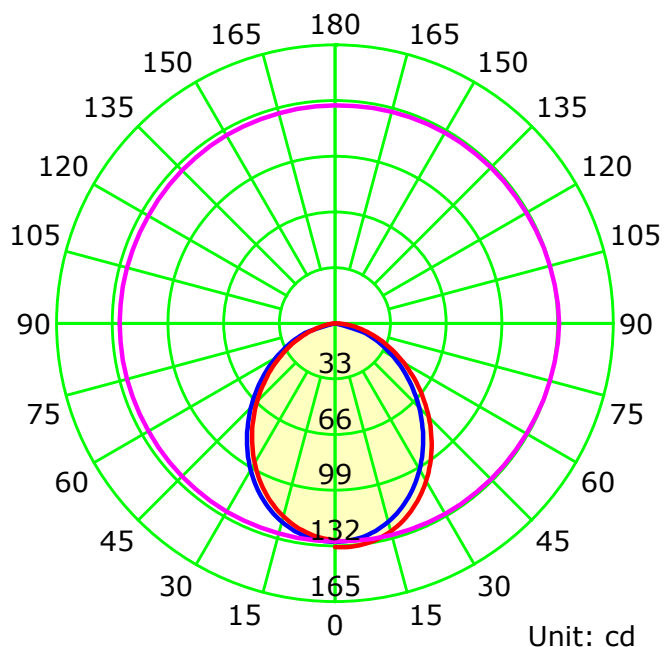


Average Diffuse Angle(50%): 96.0°


— C0-C180 — C90-C270 — G3

C Plane (°): 0.0-360.0: 30.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:


Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1800B
Distance: 5.107 m
Humidity:
Inspector:

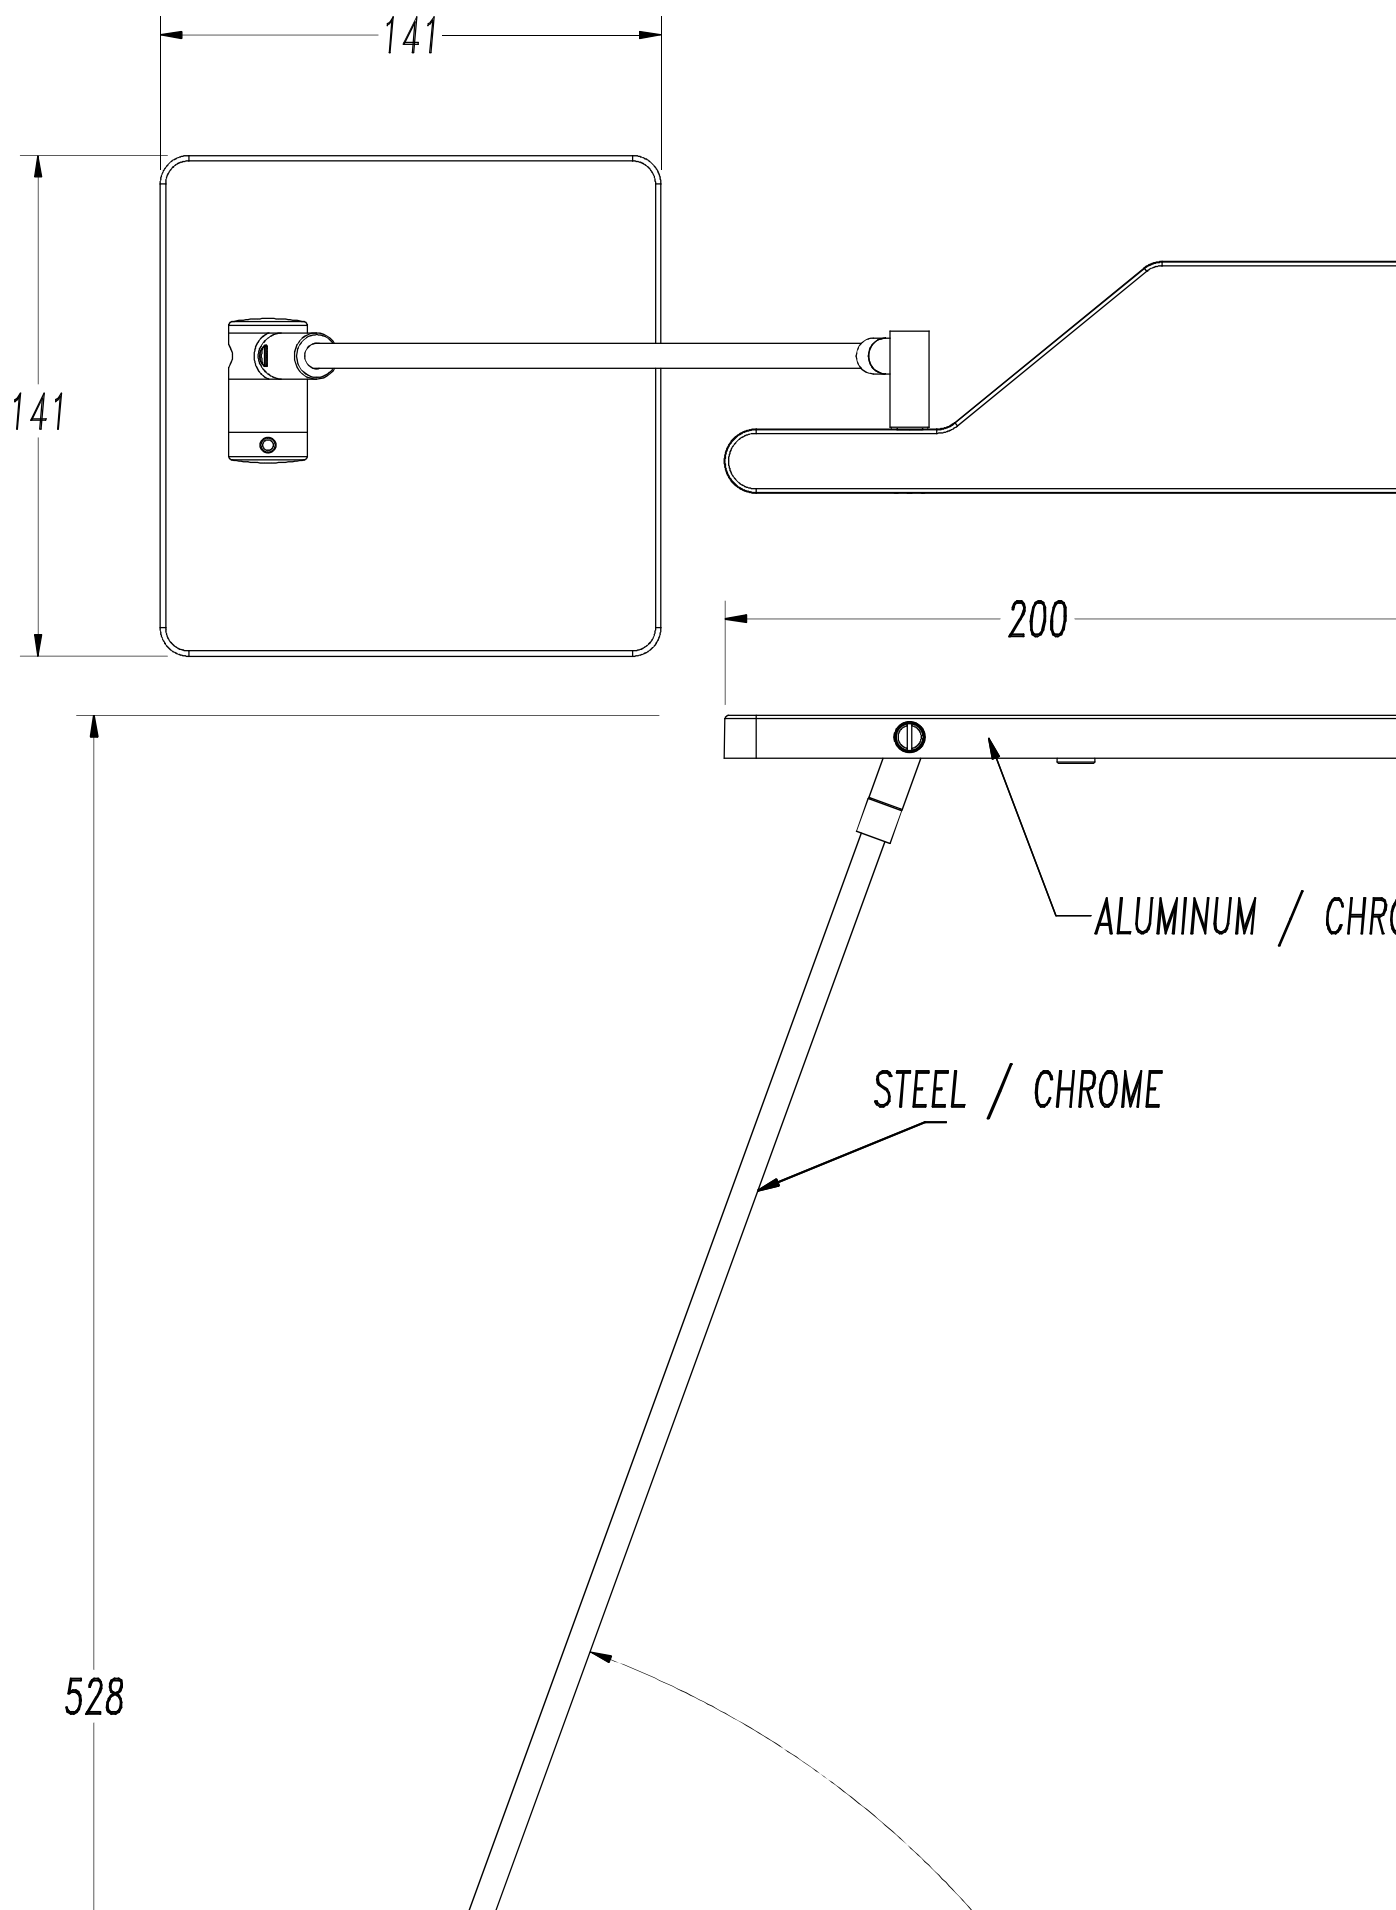


1

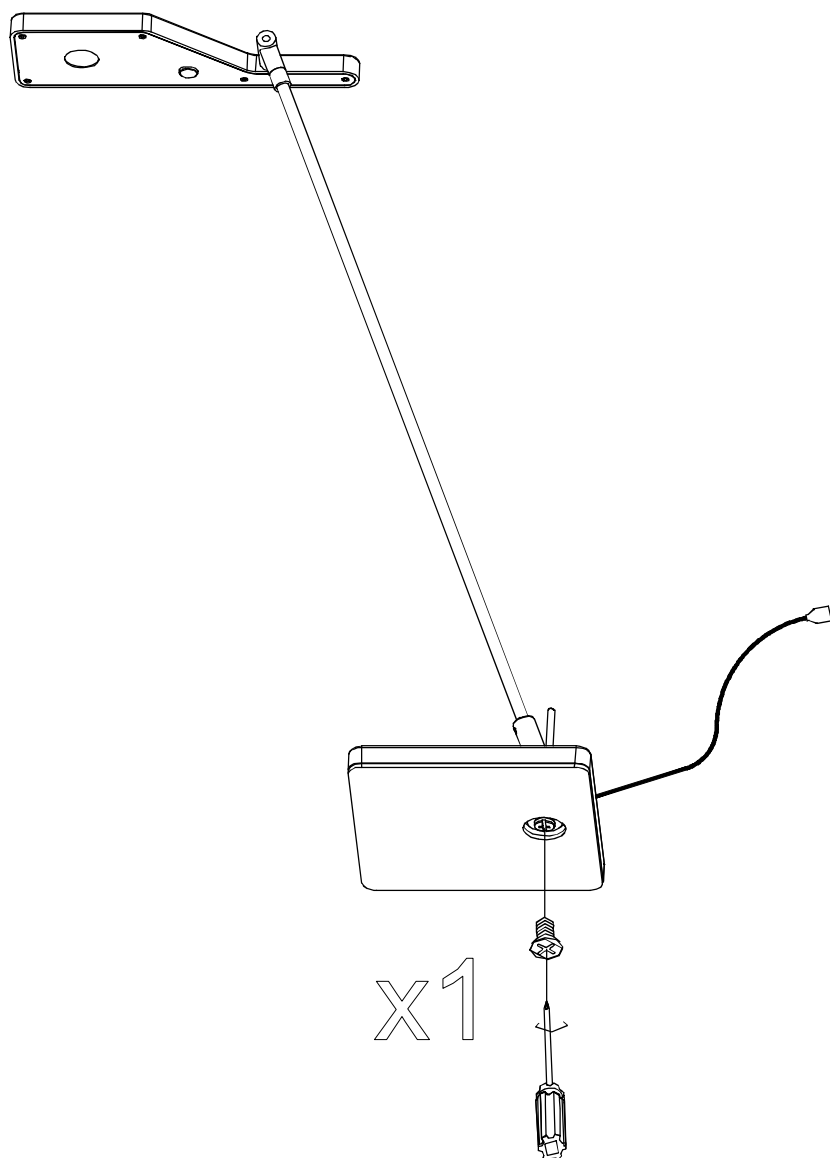

2

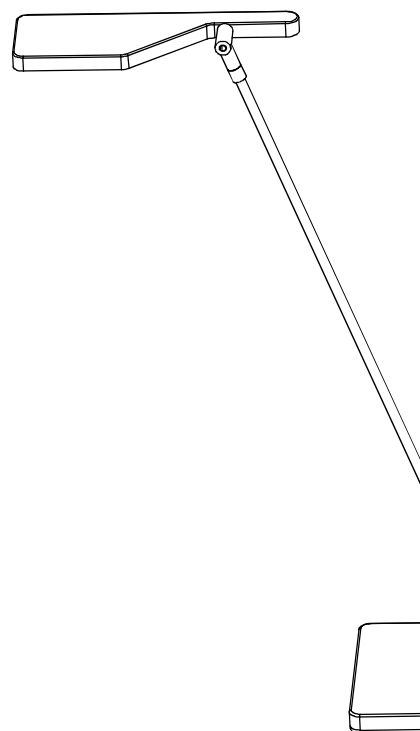

3



4

