


Design by Josep Patsí




The photograph may not match the reference exactly. Please read the product description to identify the finish.

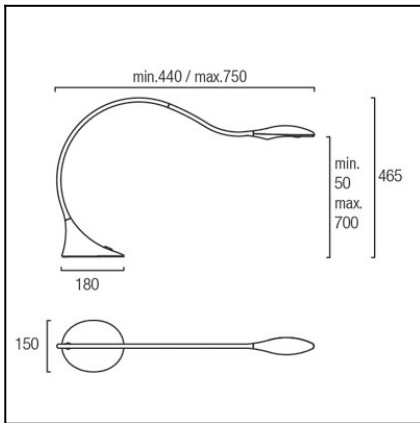

Download photometric file .ldt / .ies

TECHNICAL CHARACTERISTICS

Type:	Table lamp
Adjustable $\pm 180^\circ$ on the vertical axis	
IP Protection degrees:	IP20
Bulb:	1 x LED Cree. Warm White - 3000K
Power (W):	4.5W
Total power consumption (W):	5.9
Luminous efficacy (Lm/W):	70
LED lifetime (h):	50.000
Voltage / Frequency:	110-240V/50-60Hz
Possibilitat extensió garantia:	Sí, 5 anys
Units per box:	1
Net Weight (Kg):	2.615
EAN:	8435111089576



MATERIALS / FINISHES

Structure material: Aluminium Steel	Diffuser material: Polycarbonate
Structure finish: Chrome Black lacquered	Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Luminaire		Measur.		Lamp	
Code	10-4415-78-M2	Code	10-4415-78-M2	Code	10-4415-78-M2
Name	Sobremesa SUPLE led 4.5W	Name	Sobremesa SUPLE led 1x4.5W	Number	1
Line	- LEDS C4 LEDS	Date	14-03-2013	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	236.53 lm
Maximum value	143.56 cd	Position	C=0.00 G=5.00	Double Symmetrical	
Rectangular Luminaire Round Luminous Area	Length Diam.	440 mm 21 mm	Width Height	50 mm 0 mm	Height 35 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000346 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000084 m2	
Symmetry Type Measurement Distance	Double Symmetrical 6.44	Maximum Gamma Angle Measurement Flux	90 236.53 lm		
Operator Temperature Humidity Notes	Asselum T2 20.00 °C 47.00 %	Source voltage Source current Photocell	230.00 V PRC		


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
- LEDS C4 LEDS	10-4415-78-M2	Lámpara led blanco cálido 4.5W	236.53	4.00	1	
C.I.E.	82 91 98 100 100	D DIN 5040	A60			
F UTE	1.00 B	B NBN	BZ 2			



440mm x 50mm




C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

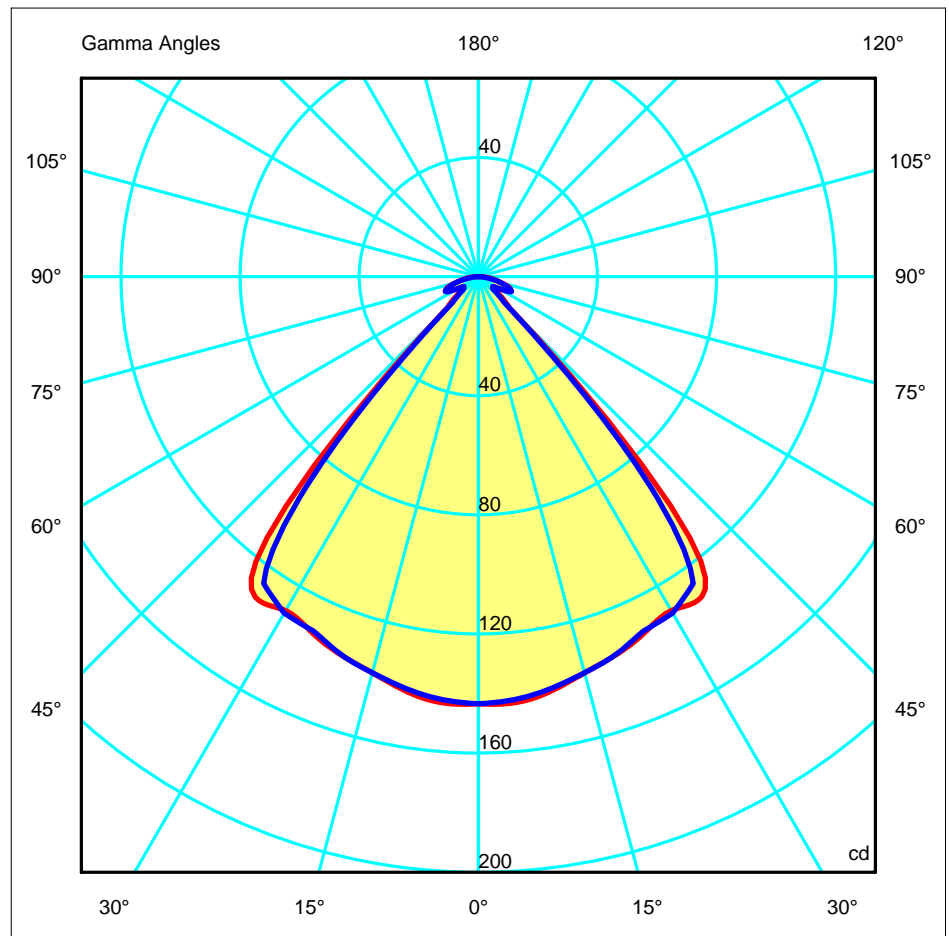

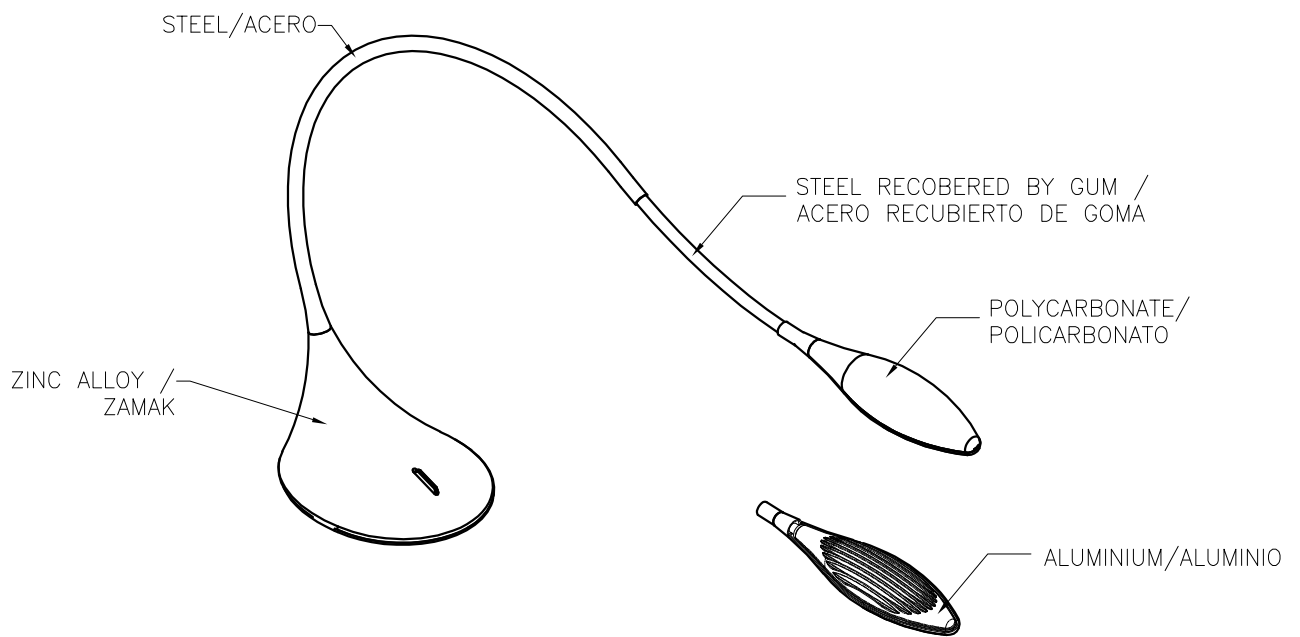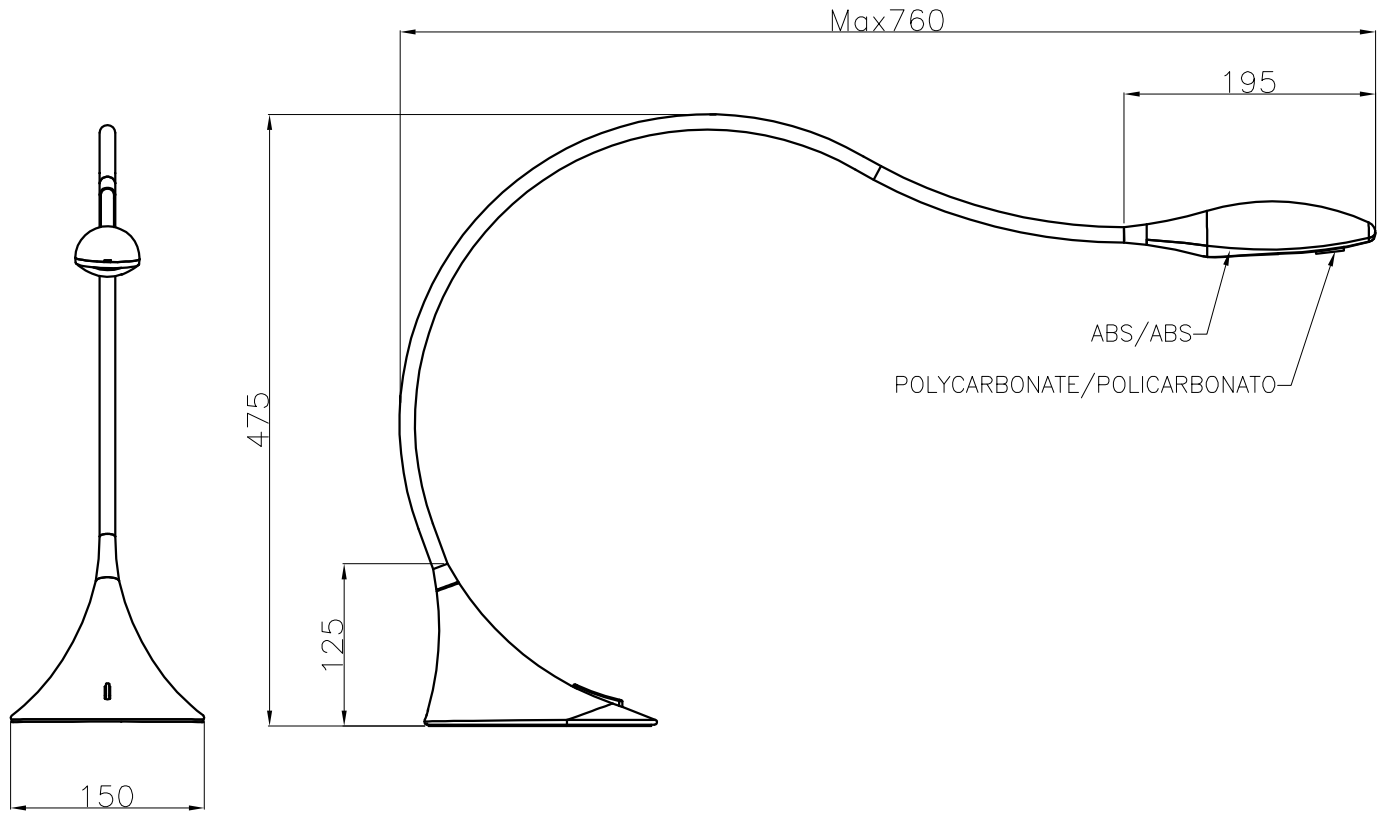

1

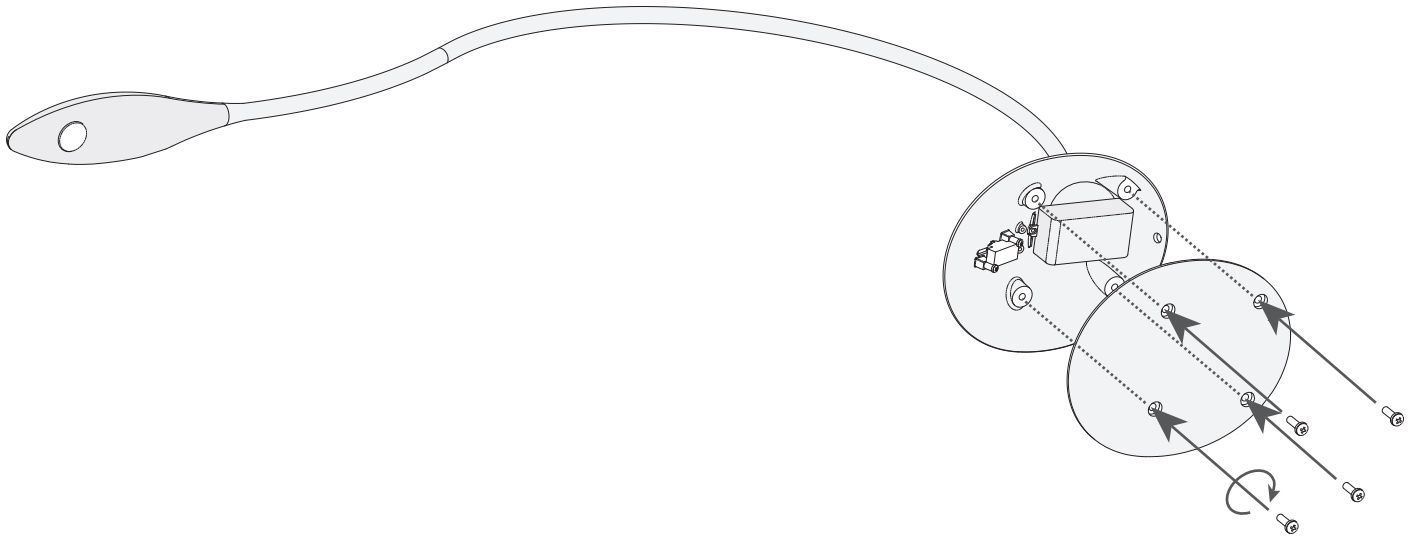

2

