



Design by Francesc Vilaró

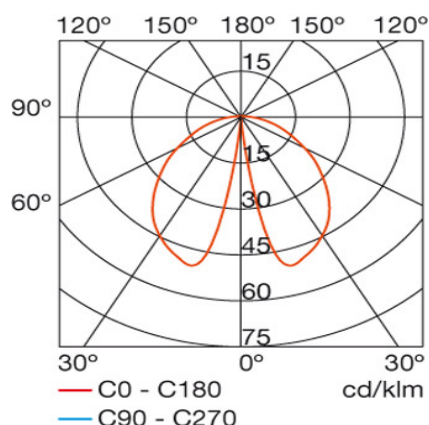

The photograph may not match the reference exactly. Please read the product description to identify the finish.

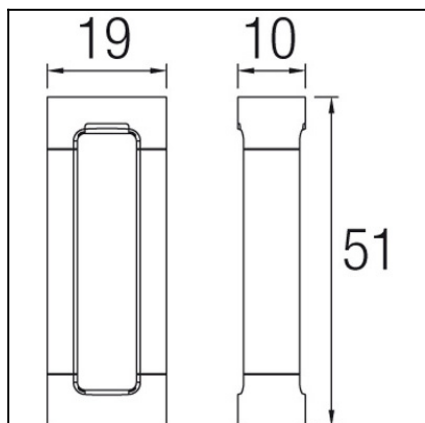

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Beacon
IP Protection degrees:	IP54
IK Protection degrees:	IK08
Lampholder:	1 x GX53
Power (W):	GX53 max. 13W
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	4
Net Weight (Kg):	2.58
EAN:	8435111089057




MATERIALS / FINISHES

Structure material:	High purity aluminium	Diffuser material:	Polycarbonate
Structure finish:	Urban grey	Diffuser finish:	Matt

Luminaria			Ensayo			Lámpara				
Código	10-9556		Código	10-9556		Código	DOWNLIGHTER 7W/827			
Nombre	Baliza fluor 7W GX5.3 dif opal		Nombre	Baliza fluor 7W GX53 dif. opal		Número	1			
Familia	- LEDS-C4		Fecha	11-11-2011		Posición	Universal			
Rendimiento			32.27%		Sist. de Coord.	C-G		Flujo Total	250.00 lm	
Valor Máximo			50.13 cd		Posición	C=0.00 G=15.00		Bisimétrico		
Luminaria Rectangular			Longit.	185 mm		Anchura	65 mm		Altura	505 mm
Área Luminosa Rectangular			Longit.	65 mm		Anchura	105 mm		Altura	5 mm
Área Luminosa Horizontal			0.006825 m2		Área Emisión sobre Pl. 180°			0.000325 m2		
Área Emisión sobre Pl. 0°			0.000325 m2		Área Emisión sobre Pl. 270°			0.000525 m2		
Área Emisión sobre Pl. 90°			0.000525 m2		Área de deslumbramiento a 76°			0.001966 m2		
Tipo de Simetría			Bisimétrico		Máximo Ángulo Gamma			180		
Distancia de Ensayo			6.44		Flujo de Ensayo			250.00 lm		
Operador			Asselum T2		Tensión de alimentación			230.00 V		
Temperatura			22.00 °C		Corr. aliment.					
Humedad			50.00 %		Fotocélula			PRC		
Notas										
Lámparas de la Luminaria										
Familia			Código	Nombre			Flujo	Pot.	Cant.	
PHILIPS 2005 ILCOS FBT,G,C,FSQ			DOWNLIGHTER 7W/827	DOWNLIGHTER 7W/827 GX53			250.00	7.00	1	
C.I.E.	48 79 94 95 32				D DIN 5040		A31			
F UTE	0.31 E + 0.02 T				B NBN		BZ 4 / 1.5 / BZ 5			


185mm x 65mm





Semiplanos C

180.0 — 0.0
270.0 — 90.0


ULOR 1.61 %
DLOR 30.66 %
RN 4.98 %

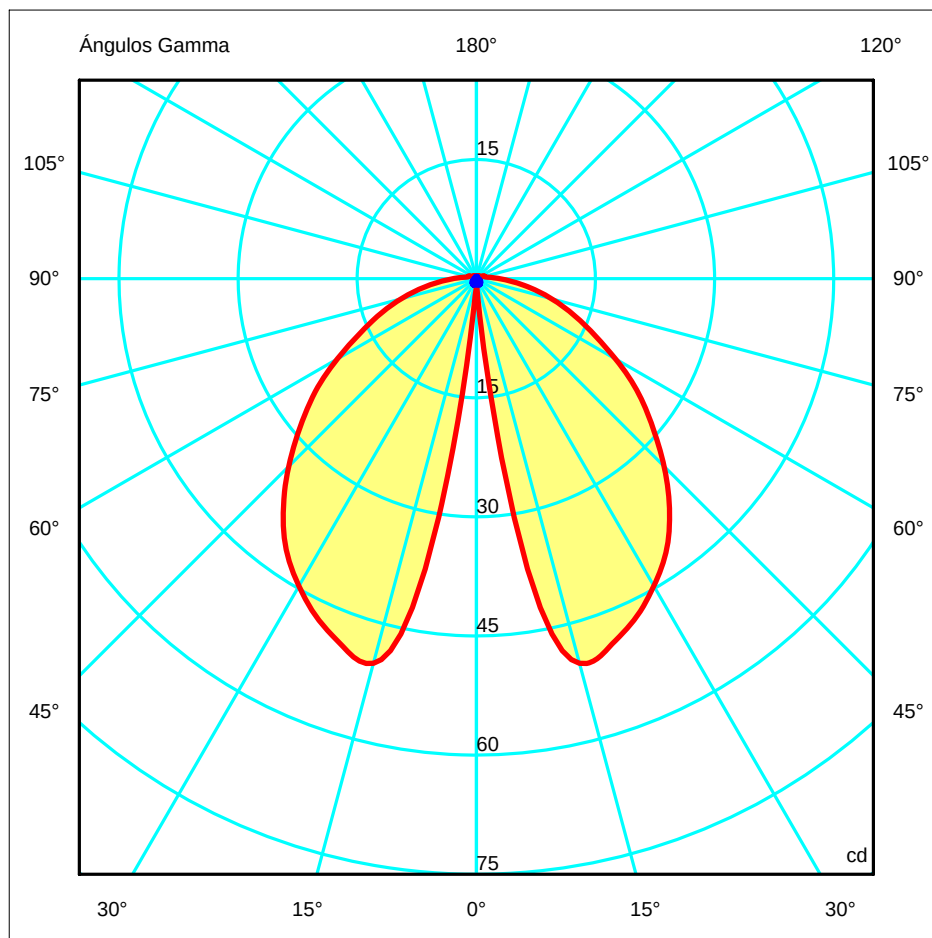

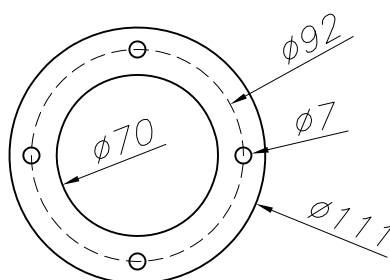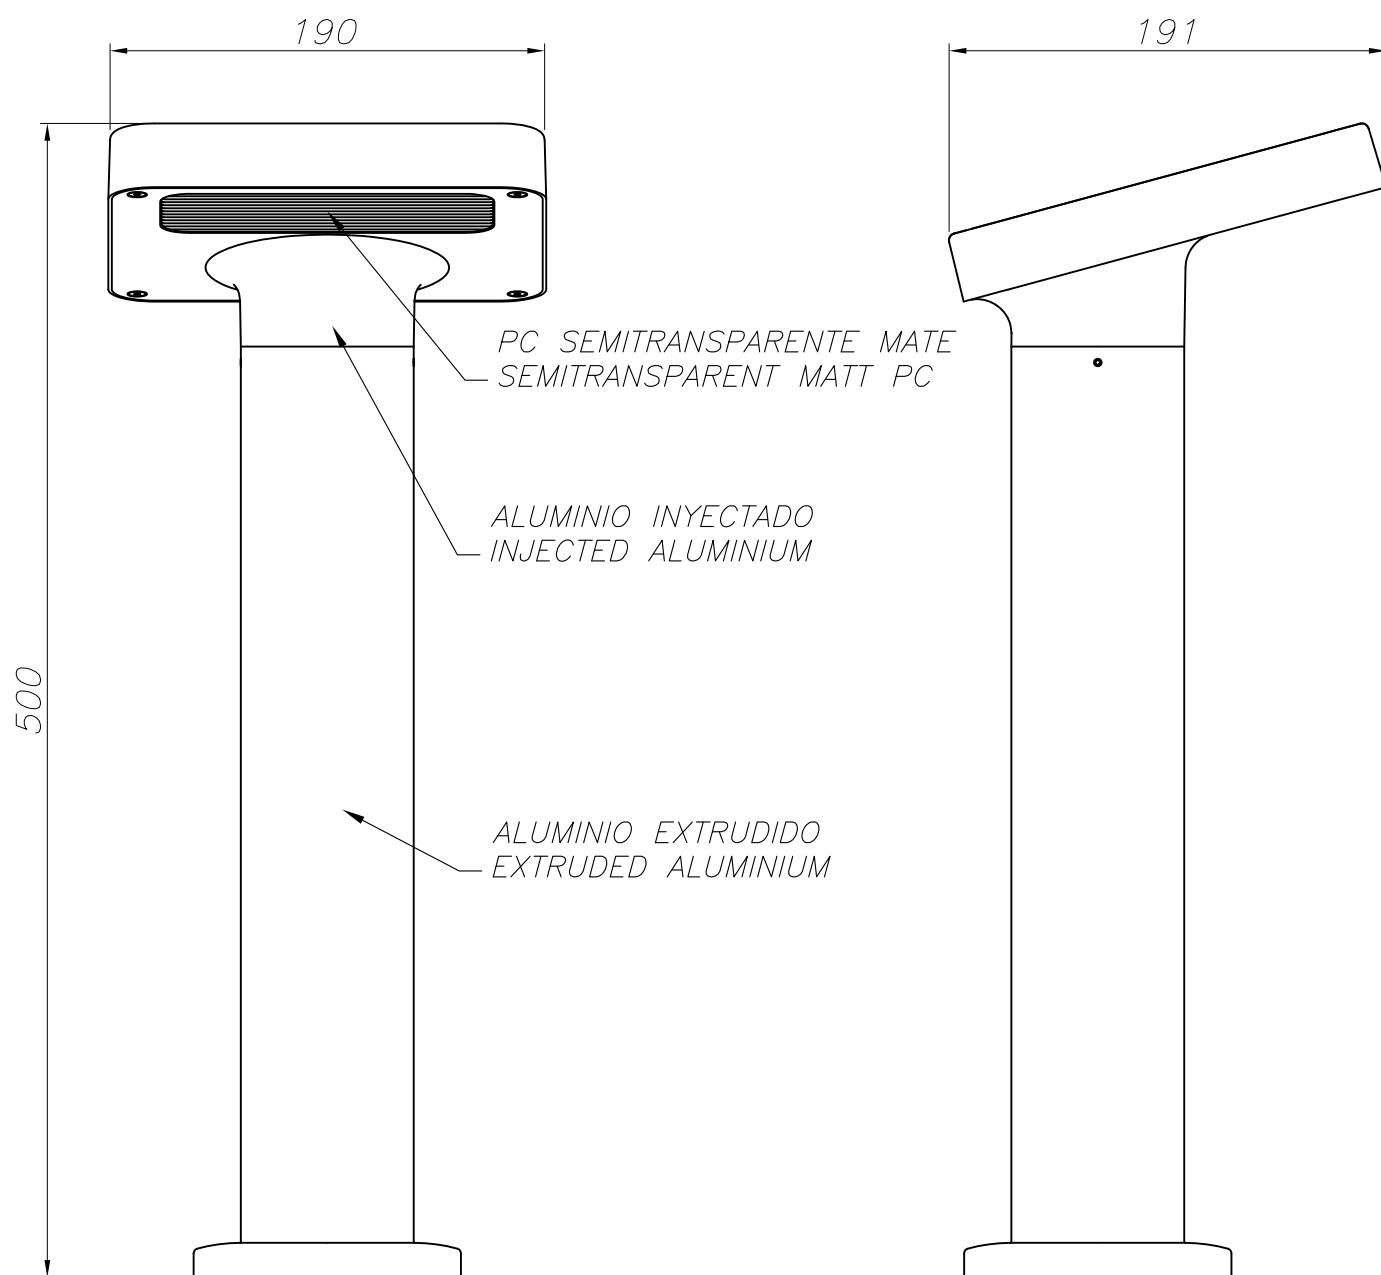


PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE


①




X2 PCS

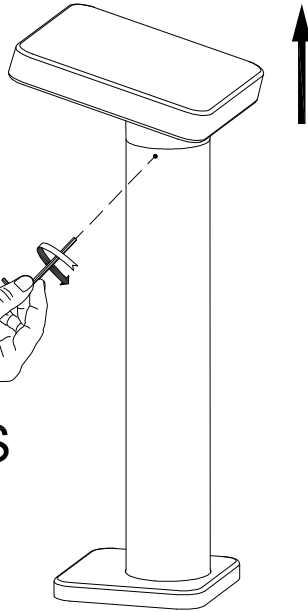

②

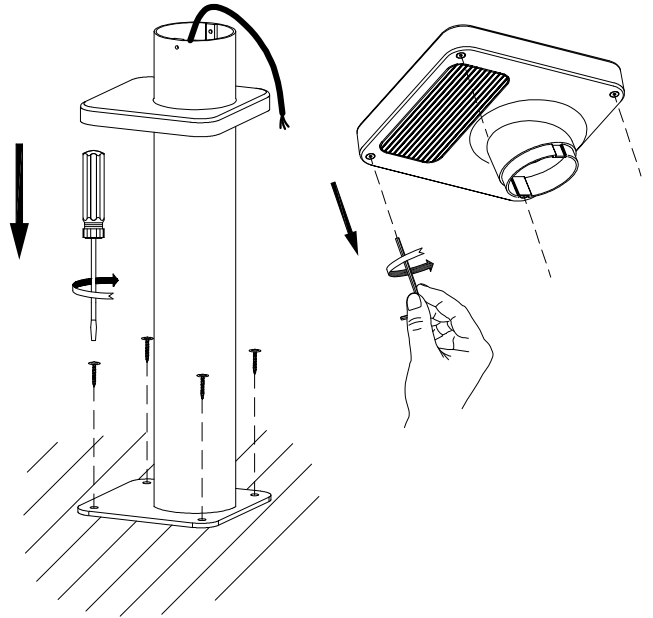

③

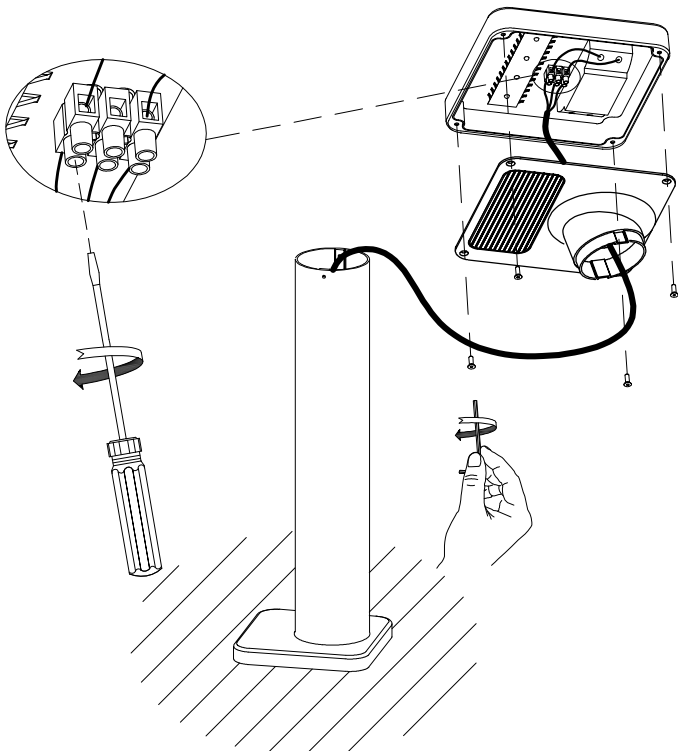

④

X2 PCS

