





The photograph may not match the reference exactly. Please read the product description to identify the finish.

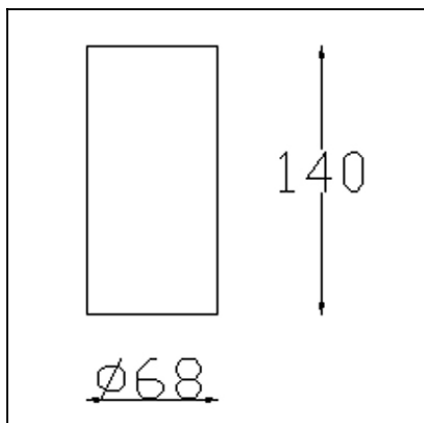

TECHNICAL CHARACTERISTICS

Type:	Focus
IP Protection degrees:	IP23
Lampholder:	1 x GU10 1 x GU10 1 x GU10
Power (W):	GU10 MAX 50W GU10 MAX 11W GU10 MAX 5.5W
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	50
Net Weight (Kg):	0.28
EAN:	8435111088159



MATERIALS / FINISHES

Structure material: Extruded aluminium
Steel


Structure finish: Matt white
Matt black

Download photometric file .ldt /.ies

Luminaire			Measurem.			Lamp		
Code	15-0073-14-05		Code	15-0073-14-05		Code	64826FL	
Name	Foco simplw 50W GU10		Name	Foco simple 50W GU10		Number	1	
Line	- LEDS-C4		Date	17-01-2013		Position	Universal	
Efficiency			83.35%		Coordinate system	C-G	Total Flux	370.00 lm
Maximum value			719.19 cd		Position	C=0.00 G=0.00	Double Symmetrical	
Round Luminaire			Diam.	68 mm	Height	140 mm		
Round Luminous Area			Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area			0.001590 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°			0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°			0.000000 m2		Glare area at 76°		0.000385 m2	
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		90	
Measurement Distance			6.44		Measurement Flux		367.00 lm	
Operator			Asselum T2		Source voltage		230.00 V	
Temperature			20.00 °C		Source current			
Humidity			49.00 %		Photocell		PRC	
Notes								

Luminaire Lamps					
Line	Code	Name	Fluxlm	Pow.W	Qta
OSRAM 2006 HS,HM,HD,HR	64826FL	HALOPAR® 16 50W GZ10	370.00	50.00	1
C.I.E.	93 99 100 100 83	D DIN 5040		A60	
F UTE	0.83 A	B NBN		BZ 1	


Diam=68mm




C Halfplanes


180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 83.35 %
RN 0.00 %

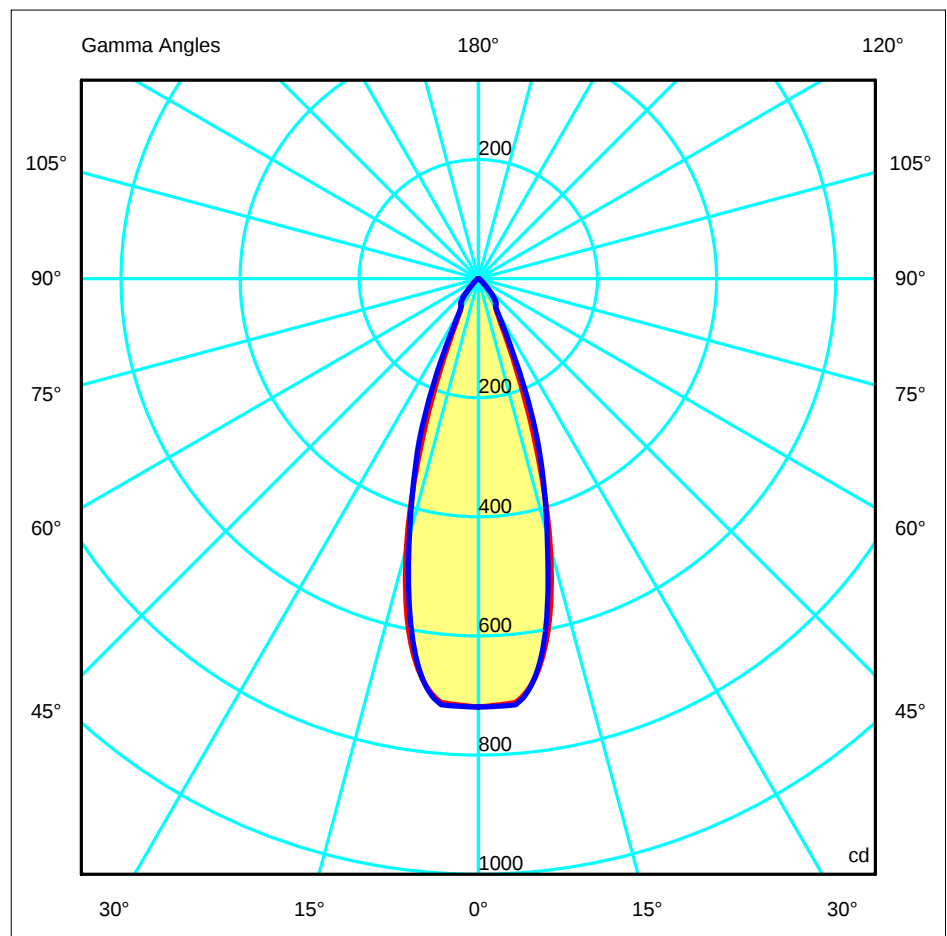


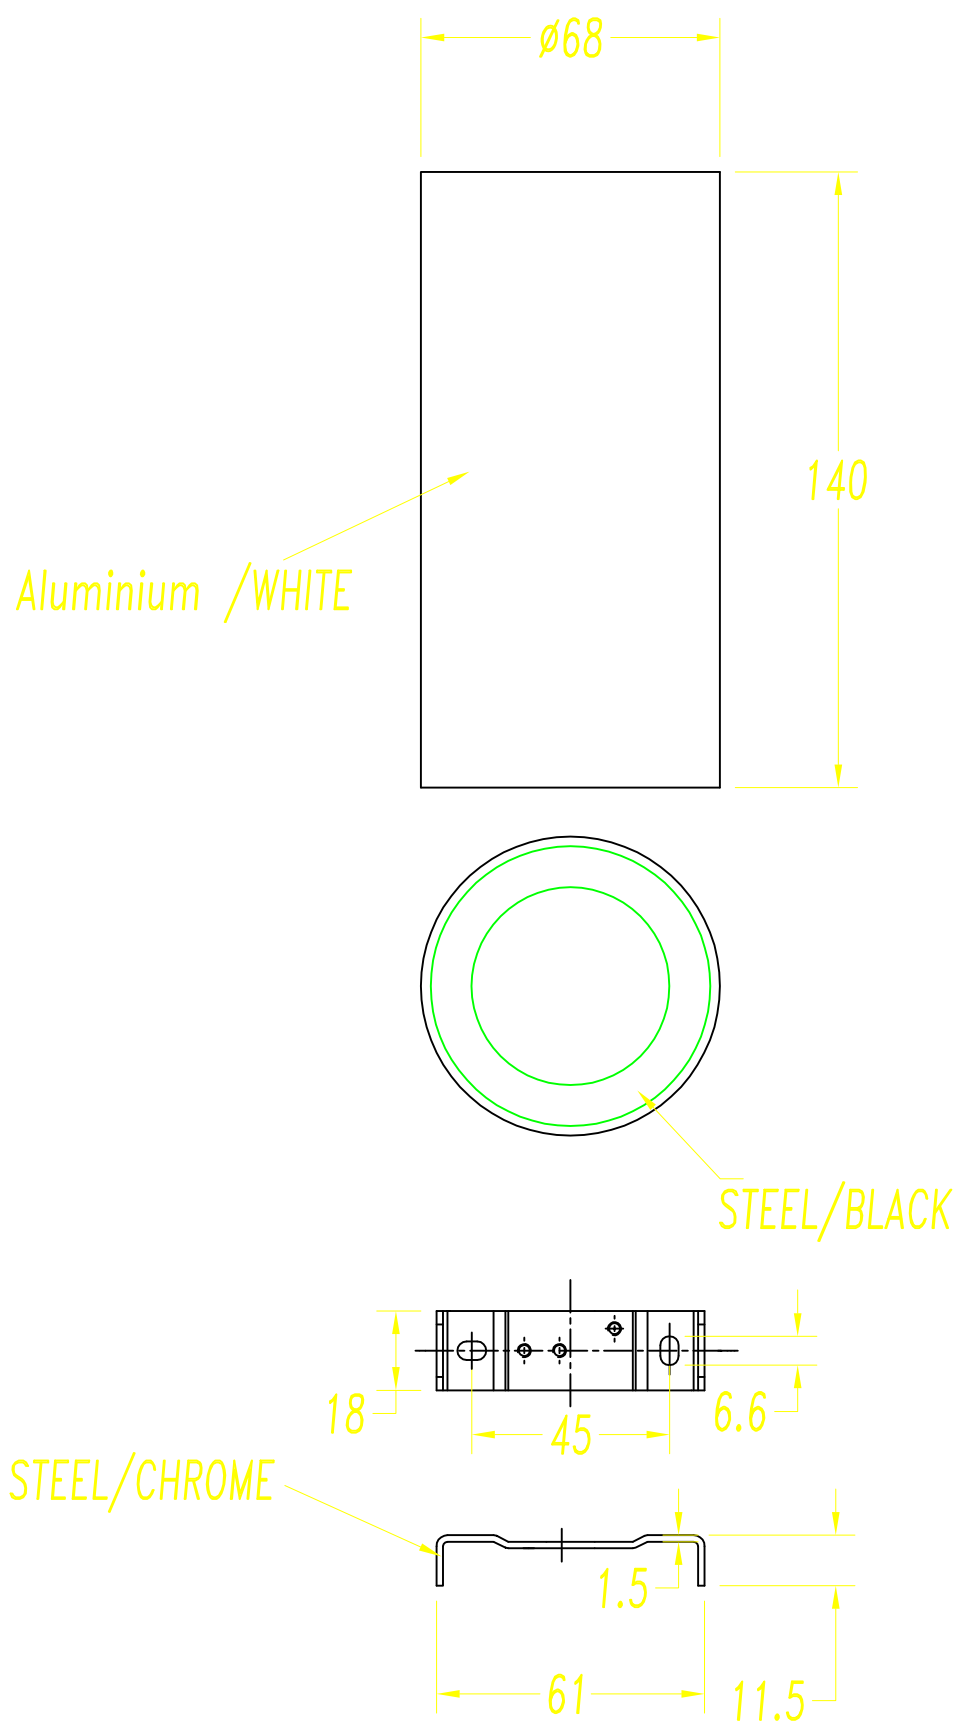


1

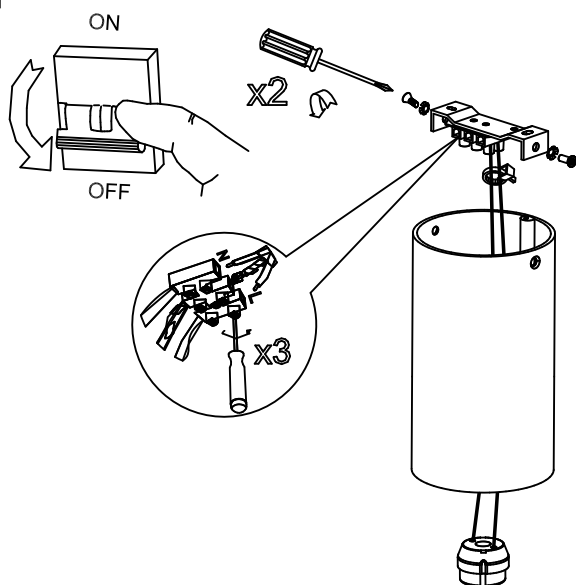


2

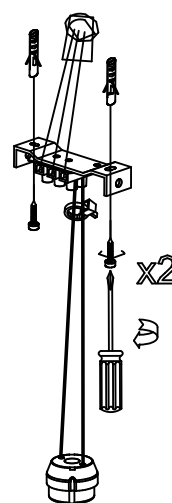


3

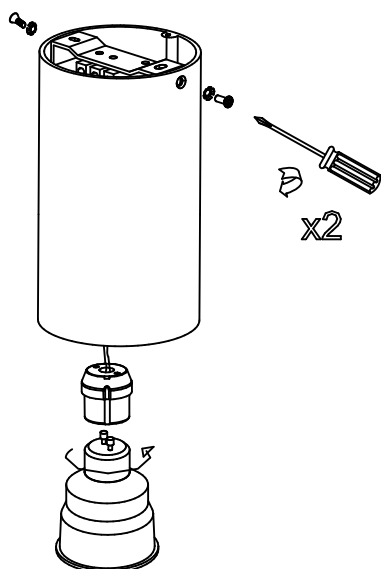

4

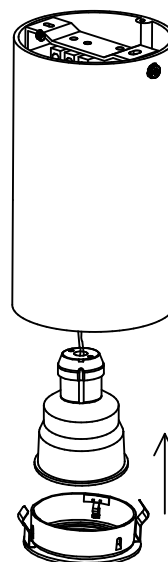

5

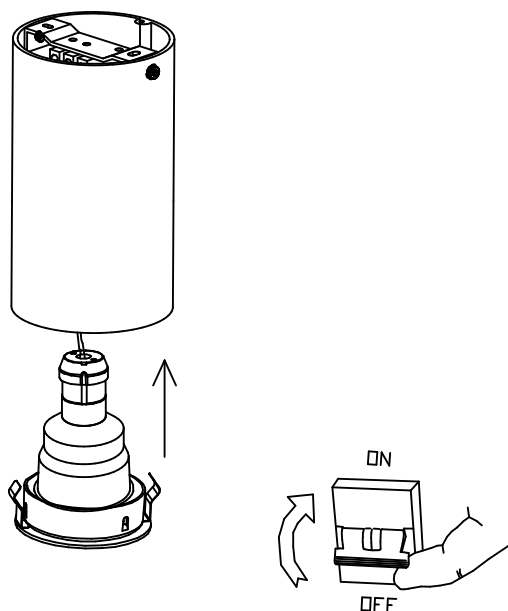

6

