



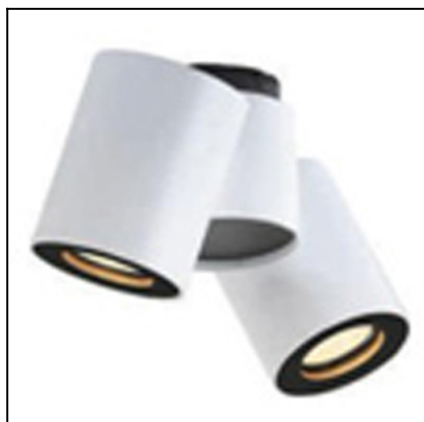


The photograph may not match the reference exactly. Please read the product description to identify the finish.

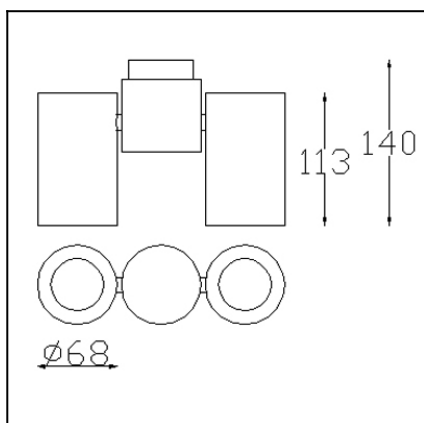

TECHNICAL CHARACTERISTICS

Type:	Focus
Adjustable $\pm 180^\circ$ on the vertical axis	
IP Protection degrees:	IP23
Lampholder:	2 x GU10 2 x GU10 2 x GU10
Power (W):	GU10 MAX 50W GU10 MAX 11W GU10 MAX 5.5W
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	6
Net Weight (Kg):	0.82
EAN:	8435111088166



MATERIALS / FINISHES


Structure material:	Aluminium Steel
Structure finish:	Matt white Matt black

Download photometric file .ldt /.ies

Luminaire			Measurem.			Lamp		
Code	15-0074-14-05		Code	15-0074-14-05		Code	64826FL	
Name	Foco doble 2x50W halogen GU10		Name	Foco doble 2x50W GU10		Number	2	
Line	- LEDS-C4		Date	19-02-2013		Position	Universal	
Efficiency			87.48%	Coordinate system		CG	Total Flux	740.00 lm
Maximum value			1274.59 cd	Position		C=0.00 G=0.00	Double Symmetrical	
Flush Rectangular			Length	212 mm	Width	68 mm	Height	125 mm
Rectangular Luminous Area			Length	188 mm	Width	45 mm	Height	0 mm
Horizontal Luminous Area			0.008460 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°			0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°			0.000000 m2		Glare area at 76°		0.002047 m2	
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		90	
Measurement Distance			6.44		Measurement Flux		589.00 lm	
Operator			Asselum T2		Source voltage		230.00 V	
Temperature			20.00 °C		Source current		PRC	
Humidity			48.00 %		Photocell			
Notes								

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
OSRAM 2006 HS,HM,HD,HR	64826FL	HALOPAR® 16 50W GZ10	370.00	50.00	2
C.I.E.	94 99 100 100 87	D DIN 5040	A60		
F UTE	0.87 A	B NBN	BZ 1		


212mm x 68mm






C Halfplanes


180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 87.48 %
RN 0.00 %

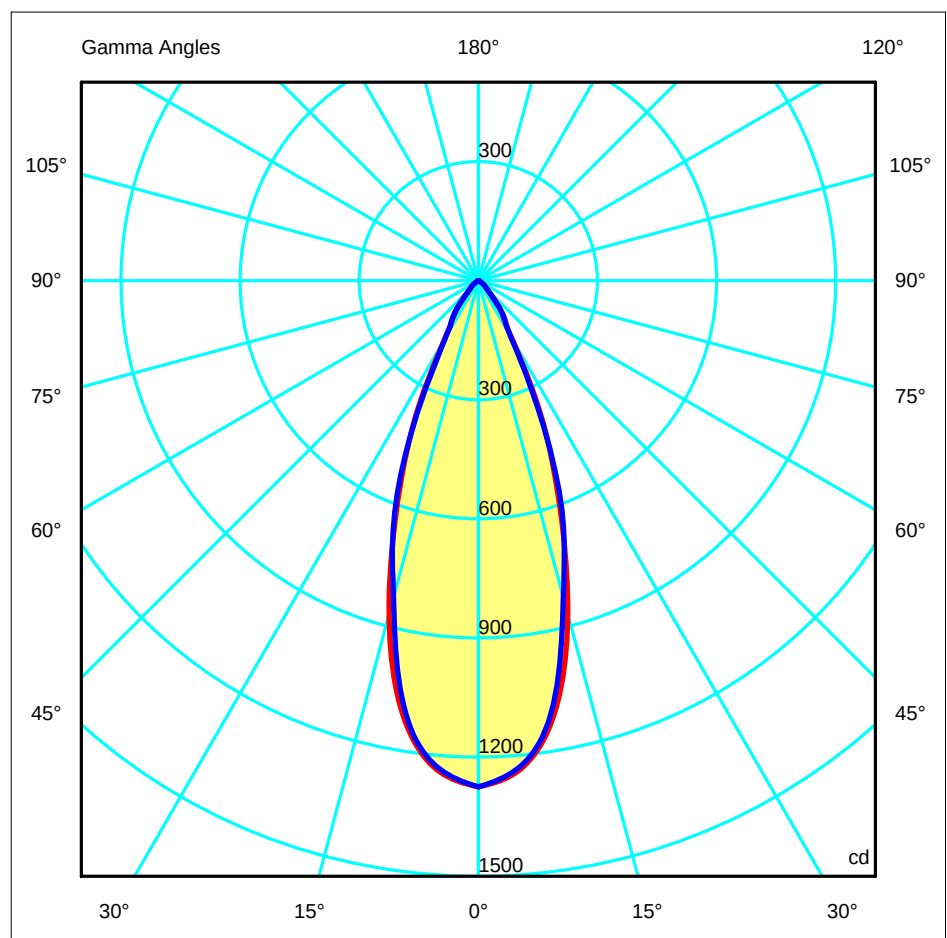


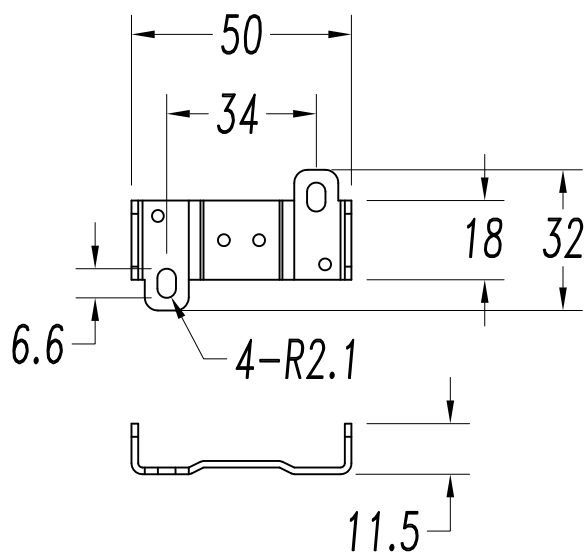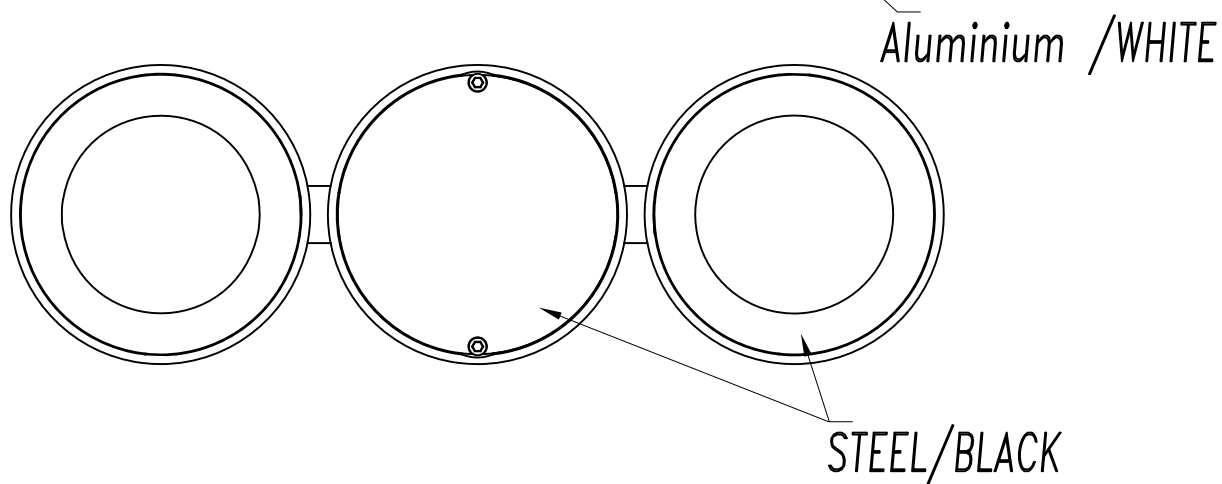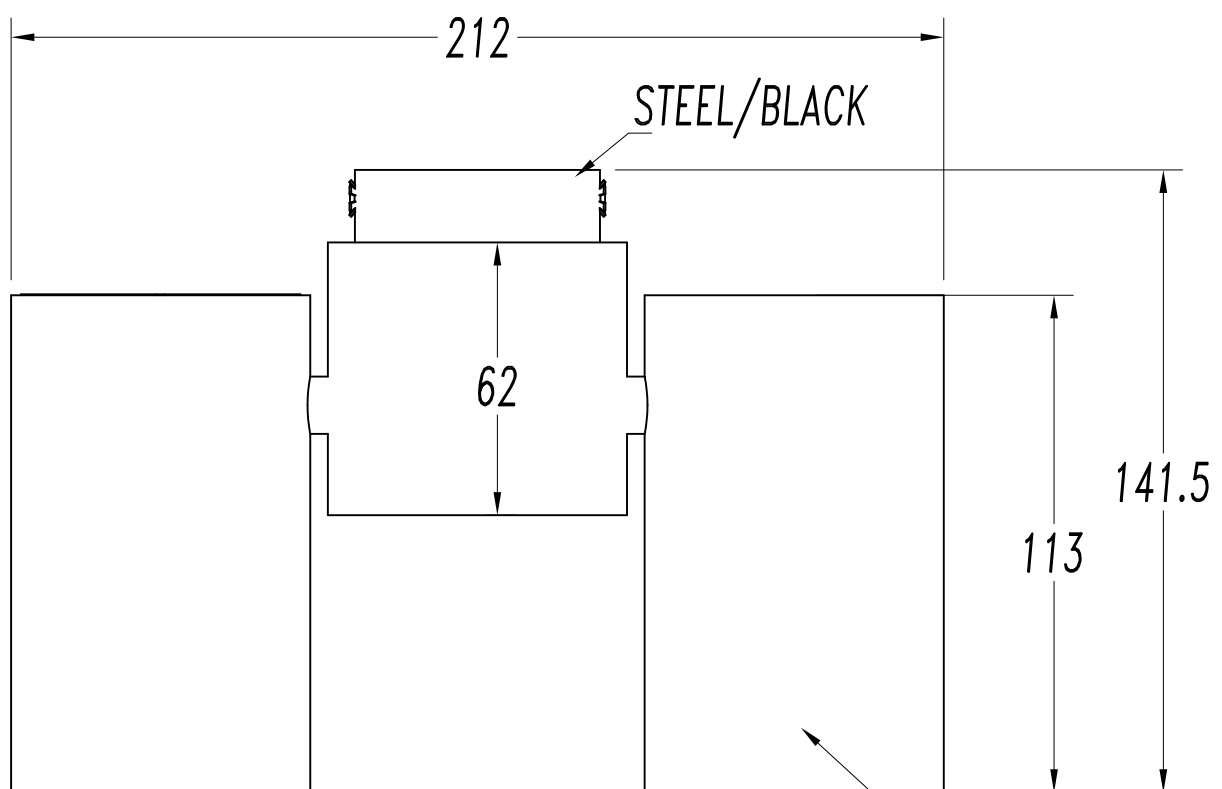


1

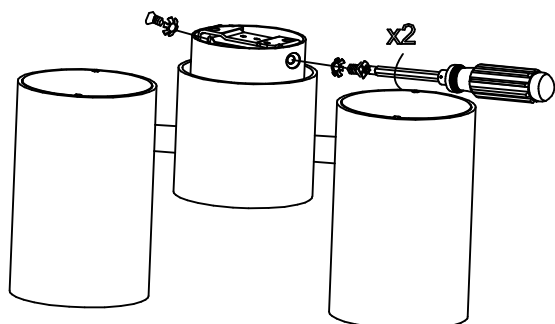


2

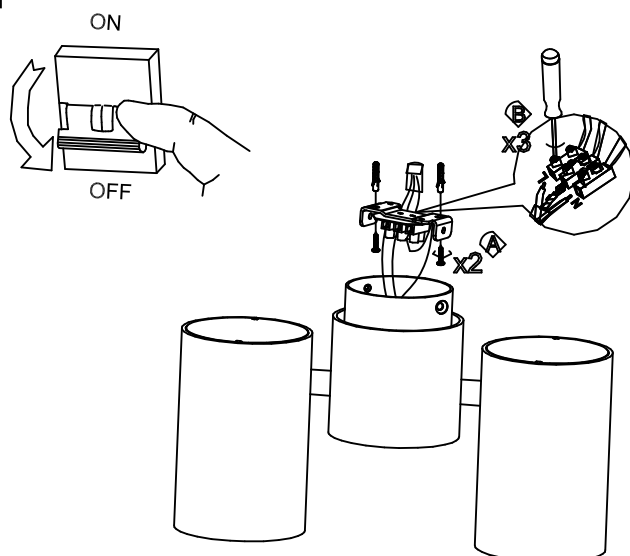


3

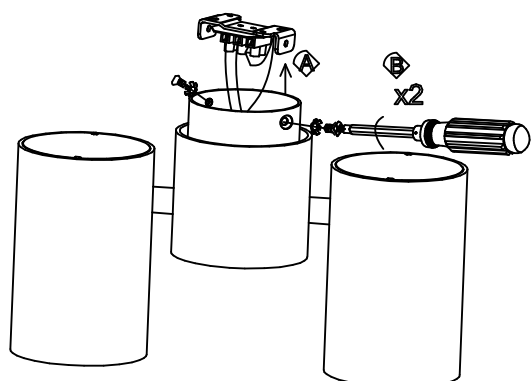

4

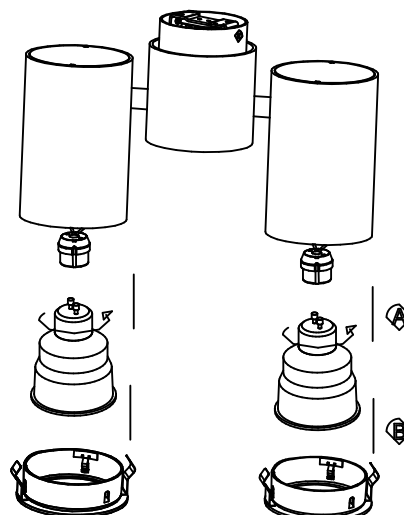

5

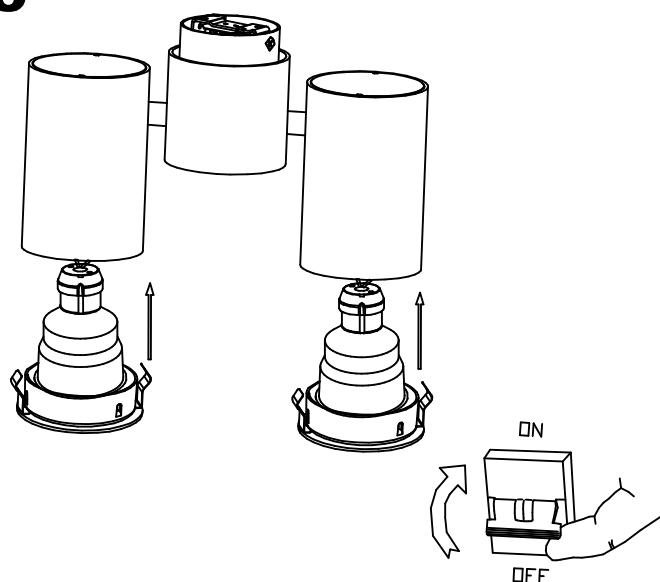

6

