


# PRISMA

## 15-4692-14-M1



The photograph may not match the reference exactly. Please read the product description to identify the finish.

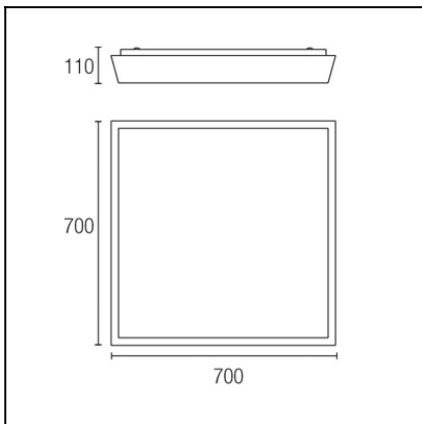

### TECHNICAL CHARACTERISTICS

|                        |                  |
|------------------------|------------------|
| Type:                  | Ceiling fixture  |
| IP Protection degrees: | IP23             |
| Lampholder:            | 3 x 2G11         |
| Power (W):             | 2G11 55W         |
| Voltage / Frequency:   | 220-240V/50-60Hz |
| Warranty (Years):      | 2                |
| Units per box:         | 1                |
| Net Weight (Kg):       | 8.77             |
| EAN:                   | 8435111087060,00 |



### MATERIALS / FINISHES

**Structure material:** Aluminium

**Structure finish:** Matt white

**Diffuser material:** Acrylic

**Diffuser finish:** Satin

### GEAR


Gear included: Yes, electronic

Download photometric file .ldt /.ies

|                            |                                |                           |                               |        |                |                |
|----------------------------|--------------------------------|---------------------------|-------------------------------|--------|----------------|----------------|
| <b>Luminaria</b>           |                                | <b>Ensayo</b>             |                               |        | <b>Lámpara</b> |                |
| Código                     | 15-4692-14-M1                  | Código                    | 15-4692-14-M1                 |        | Código         | PL-L55W/840/4P |
| Nombre                     | Plafón 3x55W TC-L difusor opal | Nombre                    | Plafon 3x55W L 2G11 dif. opal |        | Número         | 3              |
| Familia                    | - LEDS-C4                      | Fecha                     | 05-04-2012                    |        | Posición       | Universal      |
| Rendimiento                | 45.85%                         | Sist. de Coordin.         | C-G                           |        | Flujo Total    | 14400.00 lm    |
| Valor Máximo               | 2414.28 cd                     | Posición                  | C=0.00 G=0.00                 |        | Bisimétrico    |                |
| Luminaria Rectangular      | Longit.                        | 700 mm                    | Anchura                       | 700 mm | Altura         | 110 mm         |
| Área Luminosa Rectangular  | Longit.                        | 625 mm                    | Anchura                       | 625 mm | Altura         | 0 mm           |
| Área Luminosa Horizontal   | 0.390625 m2                    |                           | Área Emisión sobre Pl. 180°   |        | 0.000000 m2    |                |
| Área Emisión sobre Pl. 0°  | 0.000000 m2                    |                           | Área Emisión sobre Pl. 270°   |        | 0.000000 m2    |                |
| Área Emisión sobre Pl. 90° | 0.000000 m2                    |                           | Área de deslumbramiento a 76° |        | 0.094501 m2    |                |
| Tipo de Simetría           | Bisimétrico                    | Máximo Ángulo Gamma       |                               |        | 90             |                |
| Distancia de Ensayo        | 6.44                           | Flujo de Ensayo           |                               |        | 14400.00 lm    |                |
| Operador                   | Asselum T2                     | Tensión de alimentación   |                               |        | 230.00 V       |                |
| Temperatura                | 20.00 °C                       | Corriente de alimentación |                               |        |                |                |
| Humedad                    | 50.00 %                        | Fotocélula                |                               |        | PRC            |                |
| Notas                      |                                |                           |                               |        |                |                |

| Lámparas de la Luminaria       |                 |                             |          |       |       |  |
|--------------------------------|-----------------|-----------------------------|----------|-------|-------|--|
| Familia                        | Código          | Nombre                      | Flujo/lm | Pot.W | Cant. |  |
| PHILIPS 2005 ILCOS FBT,G,C,FSQ | PL-L55W/840/4P  | MASTER PL-L 55W/840/4P 2G11 | 4800.00  | 55.00 | 3     |  |
| C.I.E.                         | 48 80 96 100 46 | D DIN 5040                  |          |       |       |  |
| F UTE                          | 0.46 E          | B NBN                       |          |       |       |  |
|                                |                 | A30                         |          |       |       |  |
|                                |                 | BZ 4                        |          |       |       |  |


700mm x 700mm






Semiplanos C


180.0 — 0.0  
270.0 — 90.0

ULOR 0.00 %  
DLOR 45.85 %  
RN 0.00 %

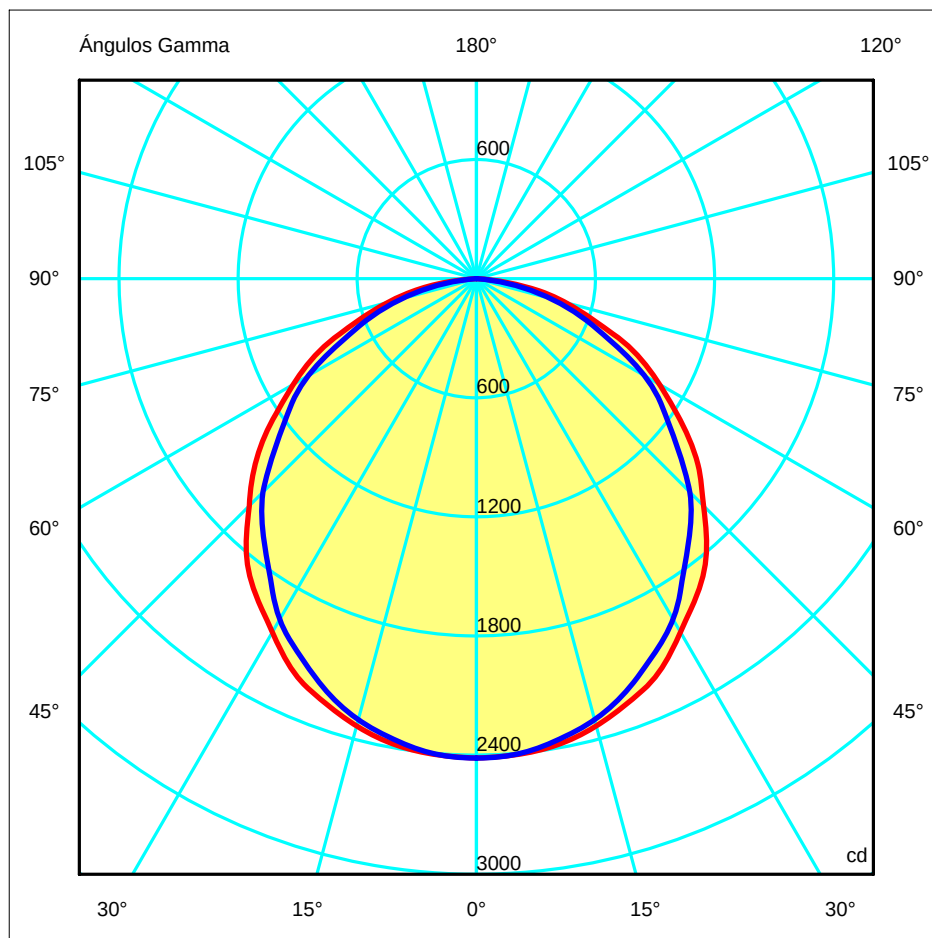


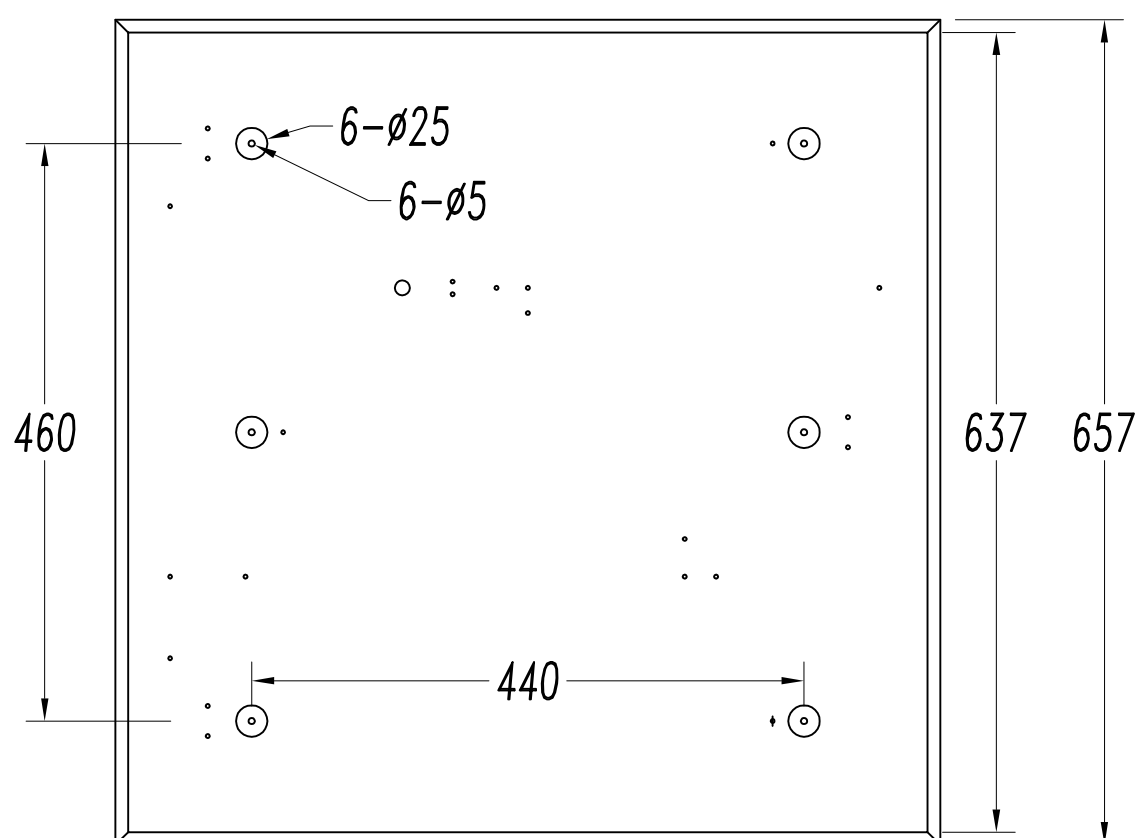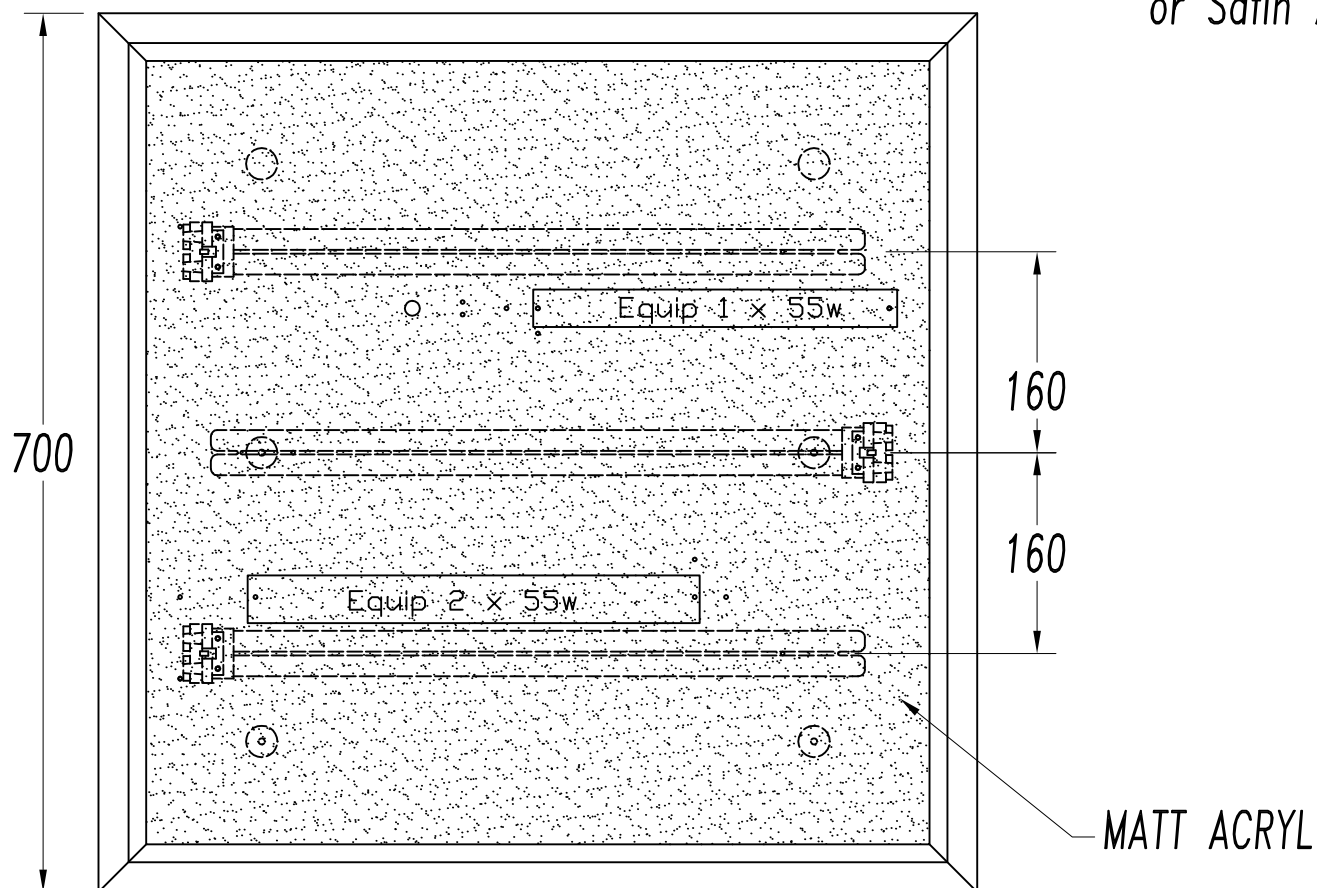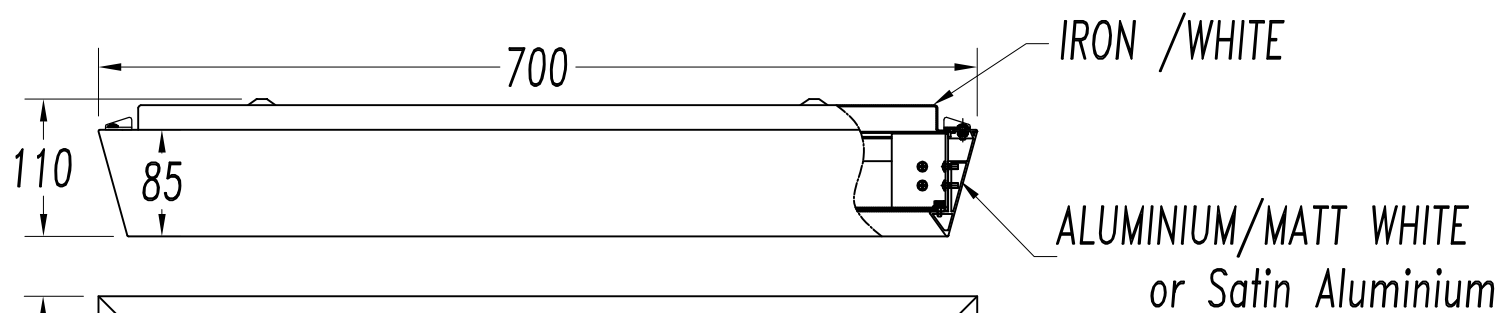


**1**

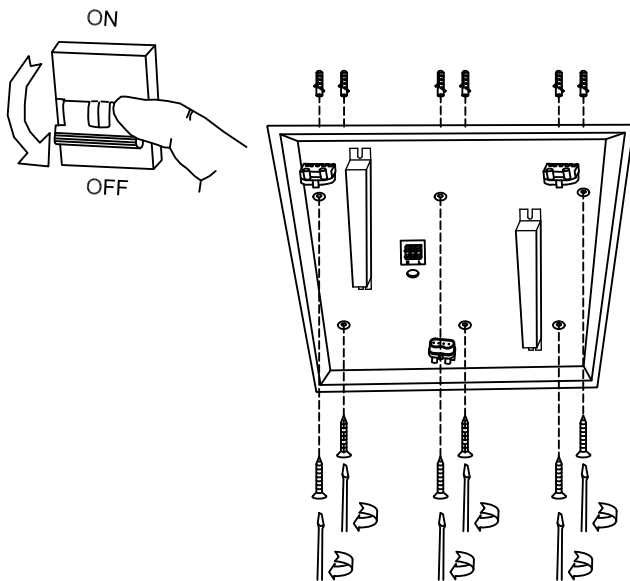


**2**

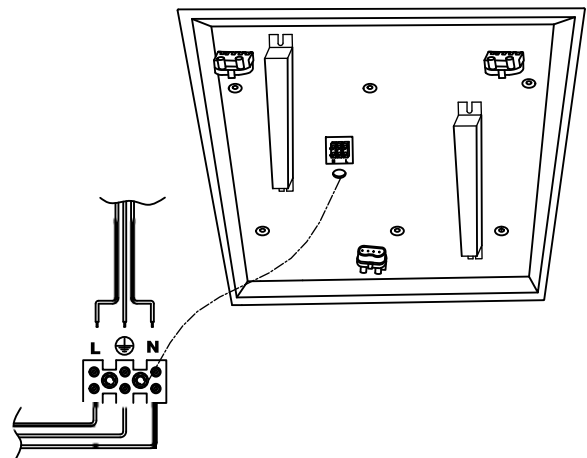


**3**

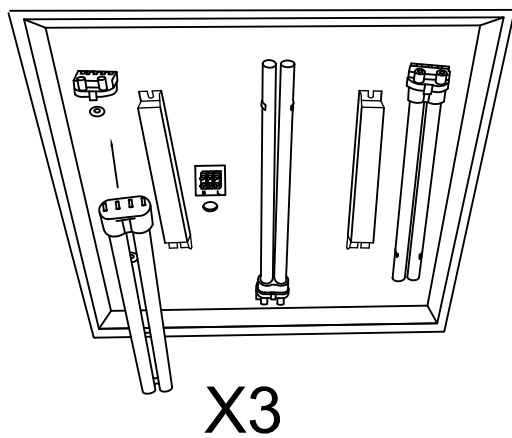

**4**

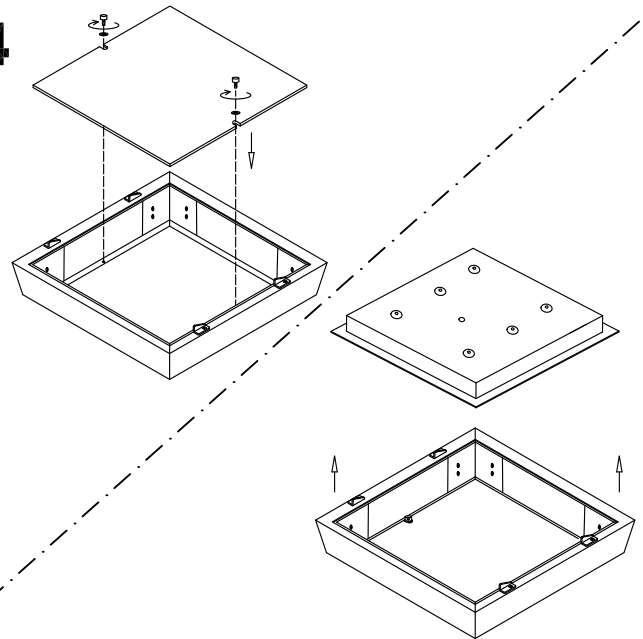

**5**

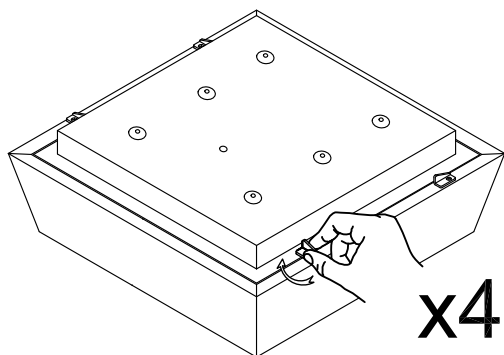

**6**

