




The photograph may not match the reference exactly. Please read the product description to identify the finish.

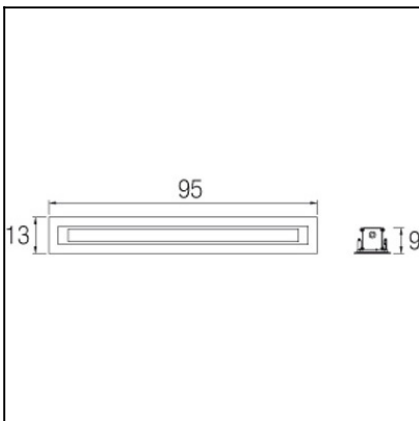


Download photometric file .ldt /.ies

**DESCRIPTION**

May be flush mounted into the wall. Body produced in extruded aluminium with an aluminium surround and a tempered glass diffuser. Light source using fluorescent bulb (not supplied). Available in two sizes: one for T5 39W and the other for T5 54W lights. Includes BAG electronic control components. It can be rotated by +/- 15°. Its design with wire outlets on both sides makes it particularly suitable for an array installation

**TECHNICAL CHARACTERISTICS**

Type:	Uplight
Adjustable $\pm 15^\circ$ on the vertical axis	
IP Protection degrees:	IP54
IK Protection degrees:	IK07
Lampholder:	1 x G5
Power (W):	G5 39W
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	2
Net Weight (Kg):	4.03
EAN:	8435111089590


**MATERIALS / FINISHES**

**Structure material:** Extruded aluminium




**Diffuser material:** Glass

**Structure finish:** Grey

**Diffuser finish:** Tempered

**GEAR**

Gear included: Yes, electronic

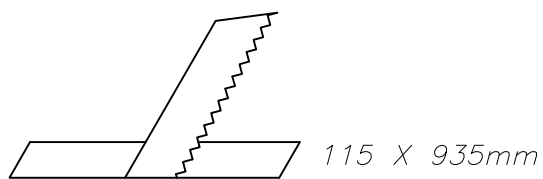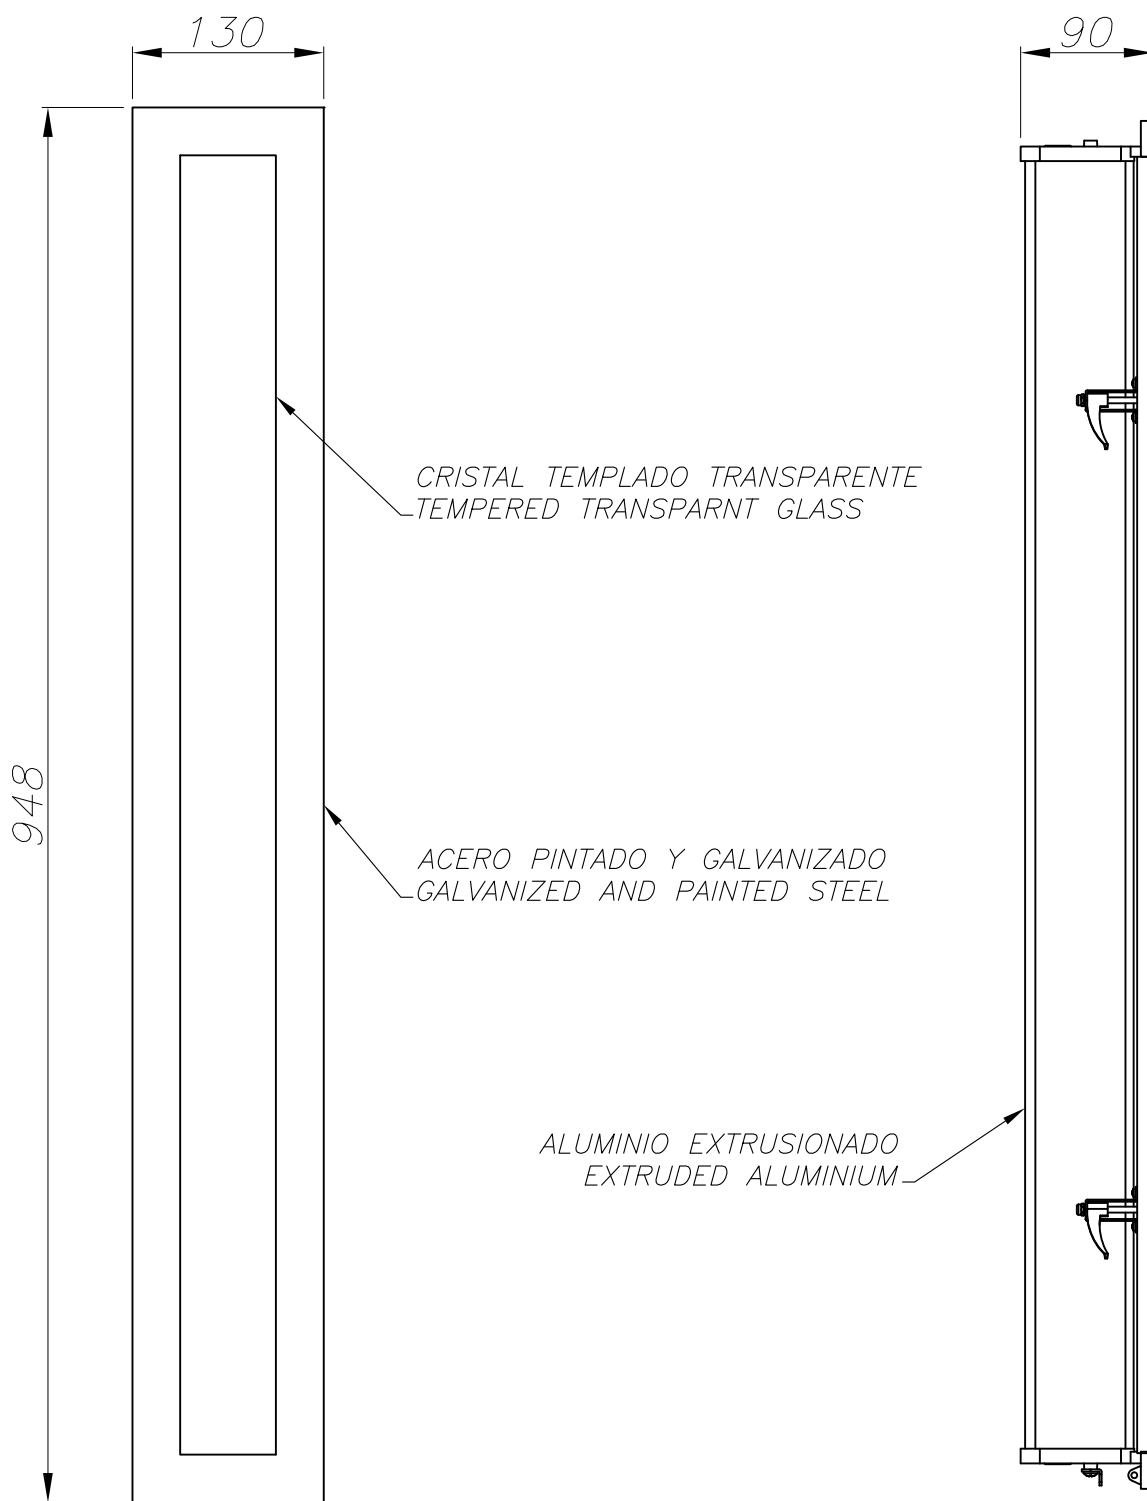

AGUJERO PARA EMPOTRAR  
FITTING HOLE

