





The photograph may not match the reference exactly. Please read the product description to identify the finish.

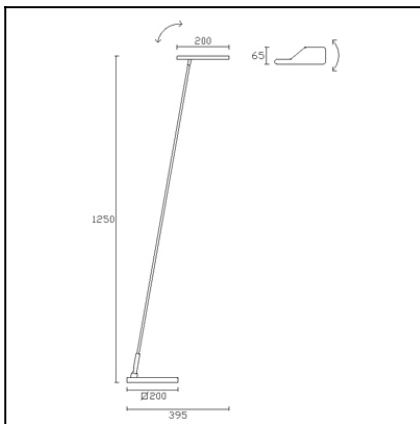

Download photometric file .ldt /.ies

### TECHNICAL CHARACTERISTICS

Type:	Floor lamp
Adjustable $\pm 180^\circ$ on the horizontal axis.	
Adjustable $\pm 90^\circ$ on the vertical axis	
IP Protection degrees:	IP20
Bulb:	1 x LED Citizen. Warm White - 3000K
Power (W):	6
Total power consumption (W):	8
Luminous efficacy (Lm/W):	72
CRI:	80
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	2
Net Weight (Kg):	3.775
EAN:	8435111098257,00
Stability:	$>15^\circ$



### MATERIALS / FINISHES

**Structure material:** Aluminium  
Steel

**Structure finish:** Chrome


### GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>		
Code	25-1523-21-21	Code	25-1523-21-21	Code	LED	
Name	ELVA	Name	ELVA	Number	1	
Line	IESNA-1995	Date	07-12-2012	Position		
Efficiency	77.21%	Coordinate system	CG	Total Flux	390.00 lm	
Maximum value	132.84 cd	Position	C=180.00 G=3.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	395 mm 395 mm	Width Width	200 mm 200 mm	Height Height	1250 mm 1250 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.079000 m2 0.493750 m2 0.250000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.493750 m2 0.250000 m2 0.498195 m2		
Symmetry Type Measurement Distance	Asymmetrical 0.00	Maximum Gamma Angle Measurement Flux		180 390.00 lm		
Operator Temperature Humidity Notes	25.00 °C 60.00 %	Source voltage Source current Photocell				

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
IESNA-1995	LED	1X3W - 8.90 W	390.00	8.90	1	
C.I.E.	54 85 98 100 77	D DIN 5040	A40			
F UTE	0.77 D	B NBN	BZ 4 / 2 / BZ 3			

395mm x 200mm



**C Halfplanes**


180.0 — 0.0




270.0 — 90.0

ULOR 0.00 %


DLOR 77.21 %

RN 0.00 %

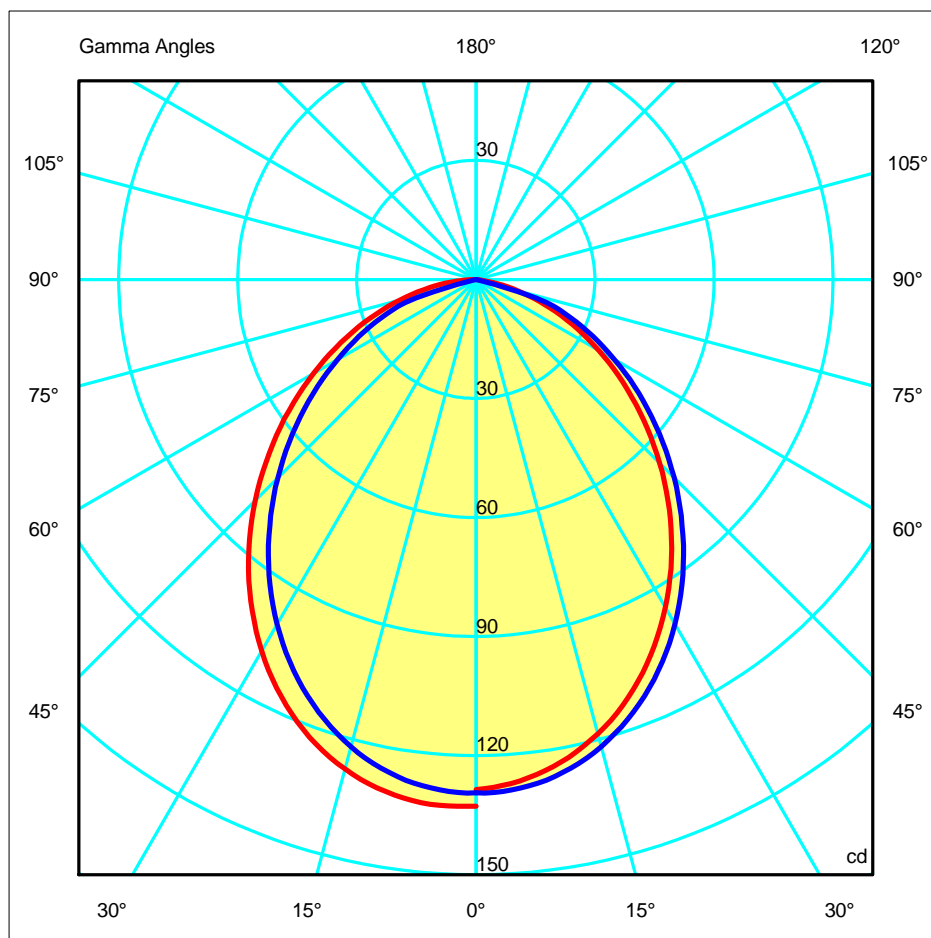


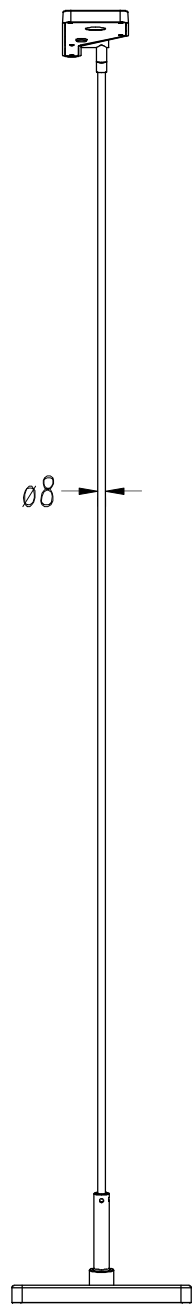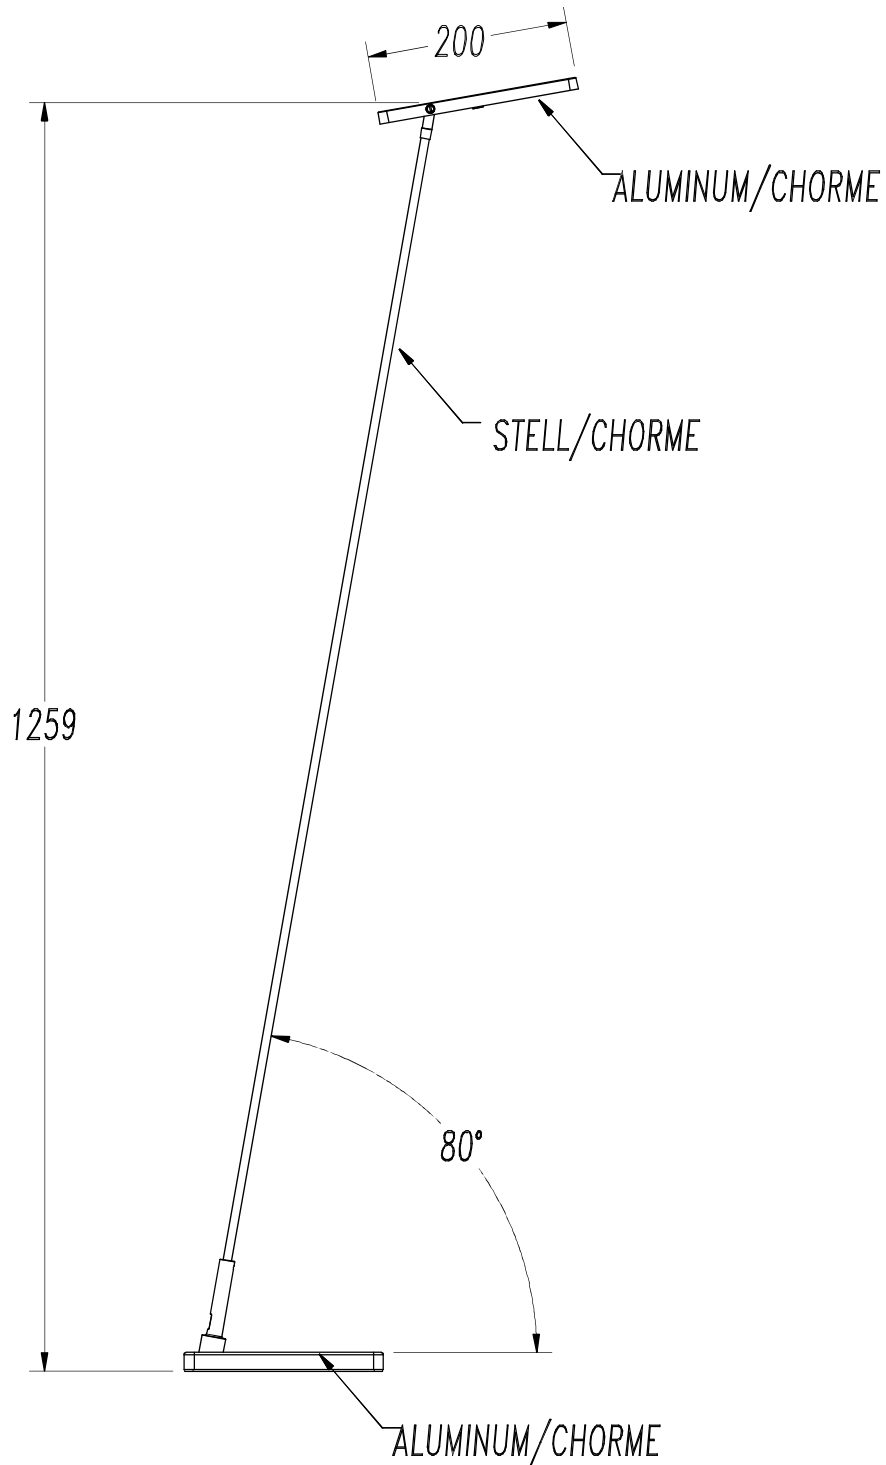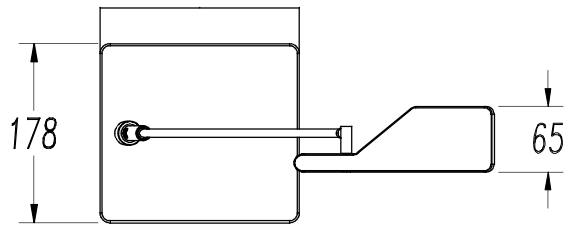


**1**

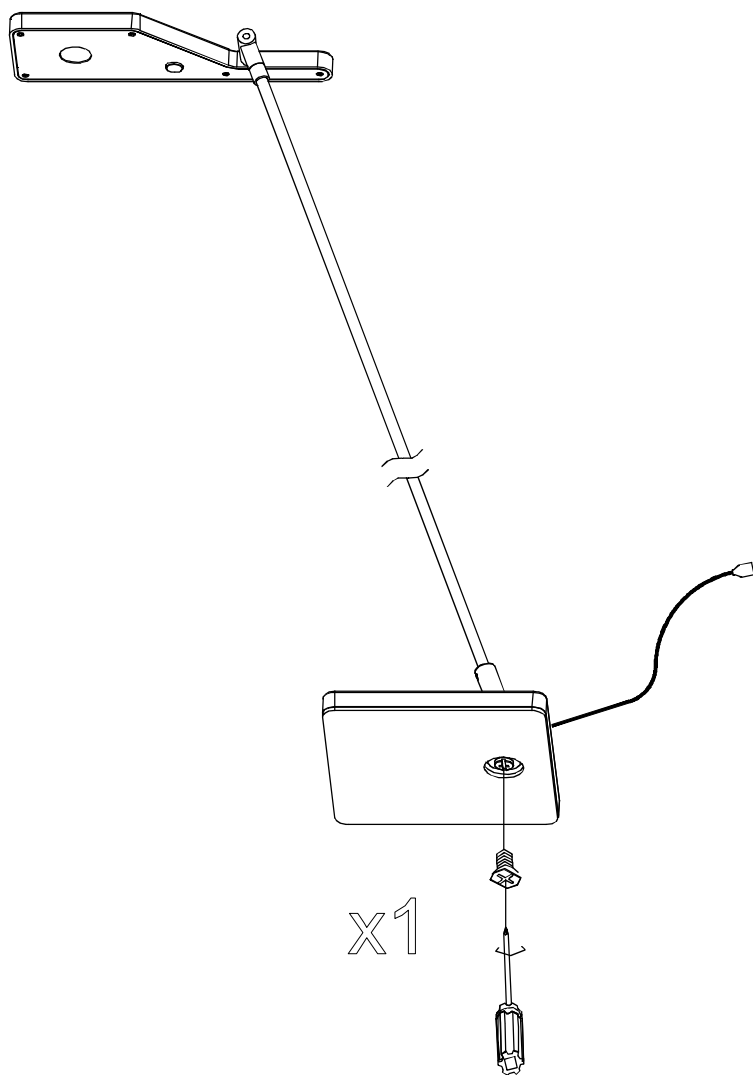

**2**

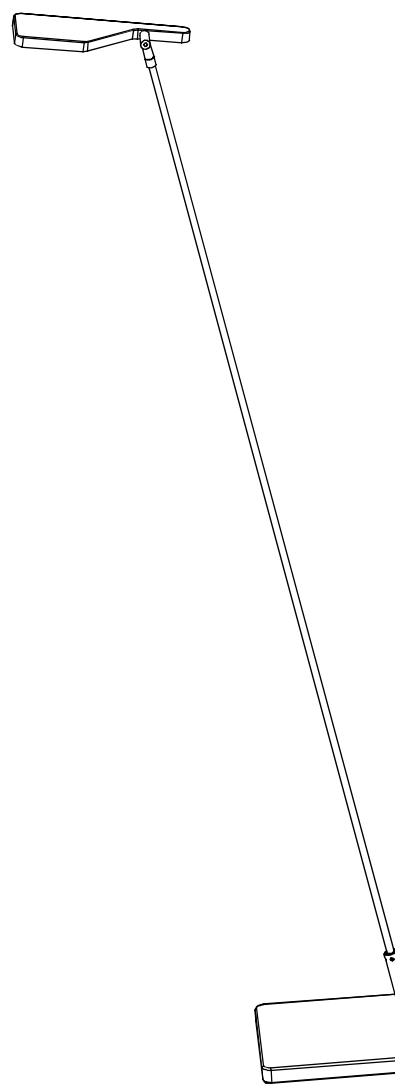

**3**



**4**

