




# KEY 35-1557-14-00



The photograph may not match the reference exactly. Please read the product description to identify the finish.



Download photometric file .ldt /.ies

### **DESCRIPTION**

Track mounted spotlight for halogen lamps, discharge lamps and 111mm diameter LED lights. Body made up of extruded aluminium and injected aluminium parts. Finish in white or black. Includes a tilting gimbal allowing multidirectional rotation and also rotation towards the unit. Surface installation possible with additional kit.

## **TECHNICAL CHARACTERISTICS**

Type:	Spotlight
Adjustable from 0° to 60° on the horizontal axis.	
Adjustable 355° on the horitzontal axis.	
Adjustable 355° on the vertical axis.2	
IP Protection degrees:	IP20
Lampholder:	1 x GX8.5
Power (W):	GX8.5 35
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
EAN:	8,43511E+12




# **MATERIALS / FINISHES**

**Structure material:** Aluminium **Structure finish:** White

## **GEAR**

Gear included: Yes, electronic



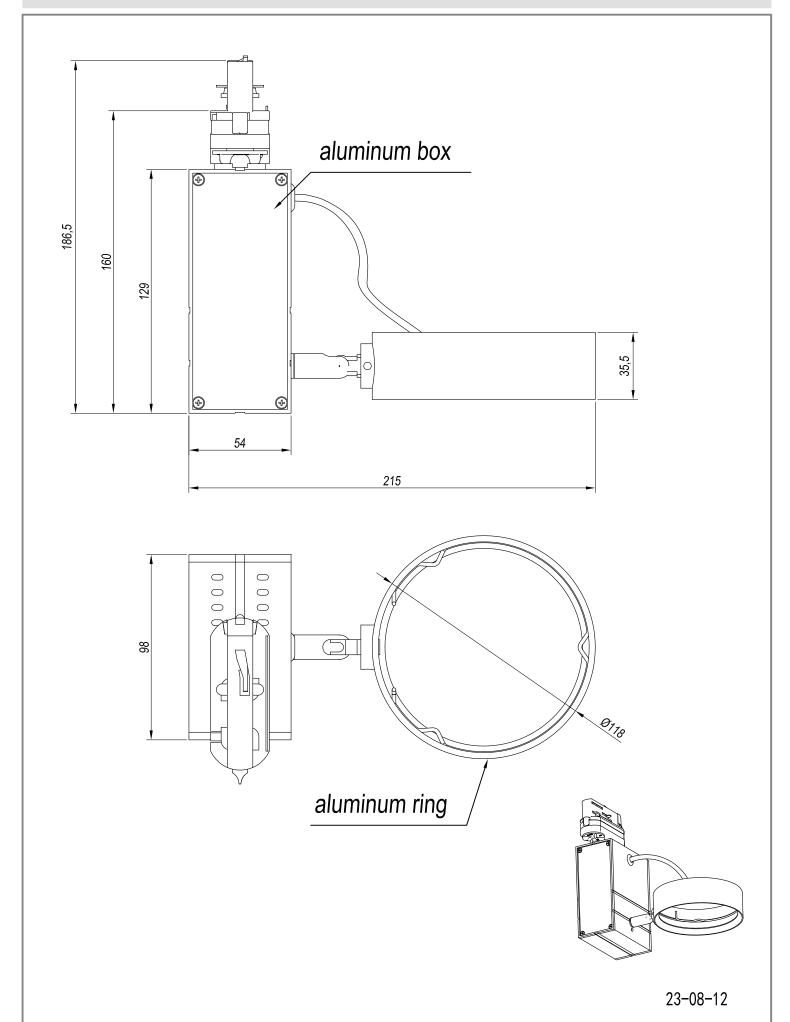



REF.	LAMP	SOCKET
35-1557-14/60-00	CDM-R111 35W	GX8.5
35-1558-14/60-00	CDM-R111 70W	GX8.5
35-1559-14/60-00	QR-111 MAX 100W/ AR-111 LED MAX 15W	G53
35-1565-14/60-00	AR-111 LED MAX 15W	GU10

