




The photograph may not match the reference exactly. Please read the product description to identify the finish.

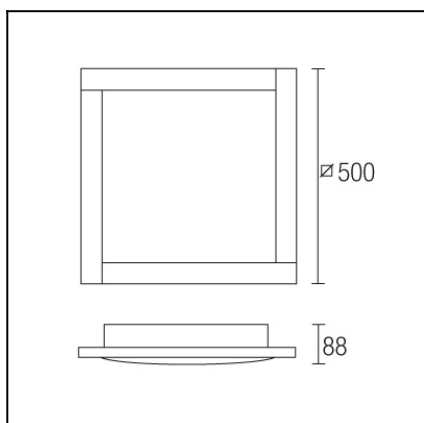

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
IP Protection degrees:	IP23
Lampholder:	3 x 2G11
Power (W):	2G11 24W
Voltage / Frequency:	230V/50-60Hz
Units per box:	1
Net Weight (Kg):	5.7
EAN:	8435111051306



MATERIALS / FINISHES


Structure material:	Aluminium	Diffuser material:	Polycarbonate
		Diffuser finish:	Matt opal

GEAR

Gear included: Yes, electronic

Luminaria		Ensayo			Lámpara	
Código	496-AW	Código	496-AW		Código	PL-L24W/830/4P
Nombre	Plafón 3x24W PL difusor opal	Nombre	Plafon 3x24W PL difusor opal		Número	3
Familia	- LEDS-C4	Fecha	06-11-2012		Posición	Universal
Rendimiento	41.83%	Sist. de Coordin.	C-G		Flujo Total	5400.00 lm
Valor Máximo	725.10 cd	Posición	C=0.00 G=0.00		Bisimétrico	
Luminaria Rectangular	Longit.	500 mm	Anchura	500 mm	Altura	90 mm
Área Luminosa Rectangular	Longit.	398 mm	Anchura	398 mm	Altura	35 mm
Área Luminosa Horizontal	0.158404 m2	Área Emisión sobre Pl. 180°			0.013930 m2	
Área Emisión sobre Pl. 0°	0.013930 m2	Área Emisión sobre Pl. 270°			0.013930 m2	
Área Emisión sobre Pl. 90°	0.013930 m2	Área de deslumbramiento a 76°			0.051838 m2	
Tipo de Simetría	Bisimétrico	Máximo Ángulo Gamma			180	
Distancia de Ensayo	6.44	Flujo de Ensayo			5400.00 lm	
Operador	Asselum T2	Tensión de alimentación			230.00 V	
Temperatura	20.00 °C	Corriente de alimentación				
Humedad	52.00 %	Fotocélula			PRC	
Notas						
Lámparas de la Luminaria						
Familia	Código	Nombre			Flujo lm	Pot.W
PHILIPS 2005 ILCOS FBT,G,C,FSQ	PL-L24W/830/4P	MASTER PL-L 24W/830/4P 2G11			1800.00	24.00
Cant.						3
C.I.E.	45 76 94 96 42	D DIN 5040		A31		
F UTE	0.40 E + 0.02 T	B NBN		BZ 5		


500mm x 500mm






Semiplanos C


180.0 — 0.0
270.0 — 90.0

ULOR 1.65 %
DLOR 40.18 %
RN 3.95 %

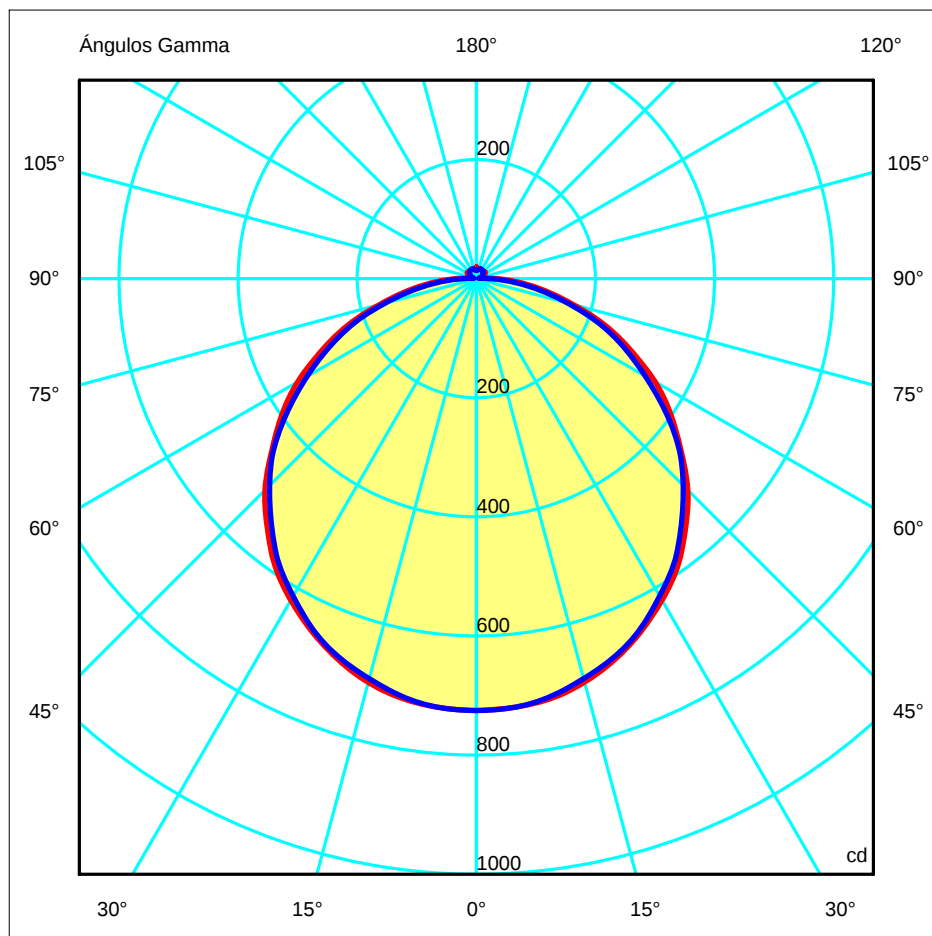


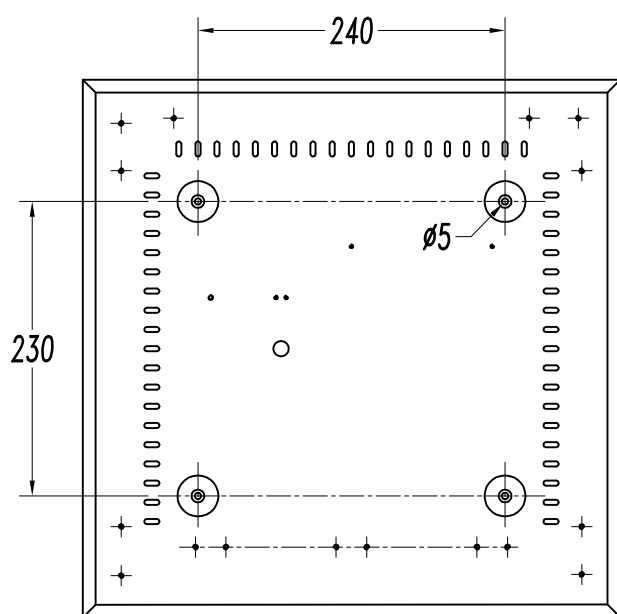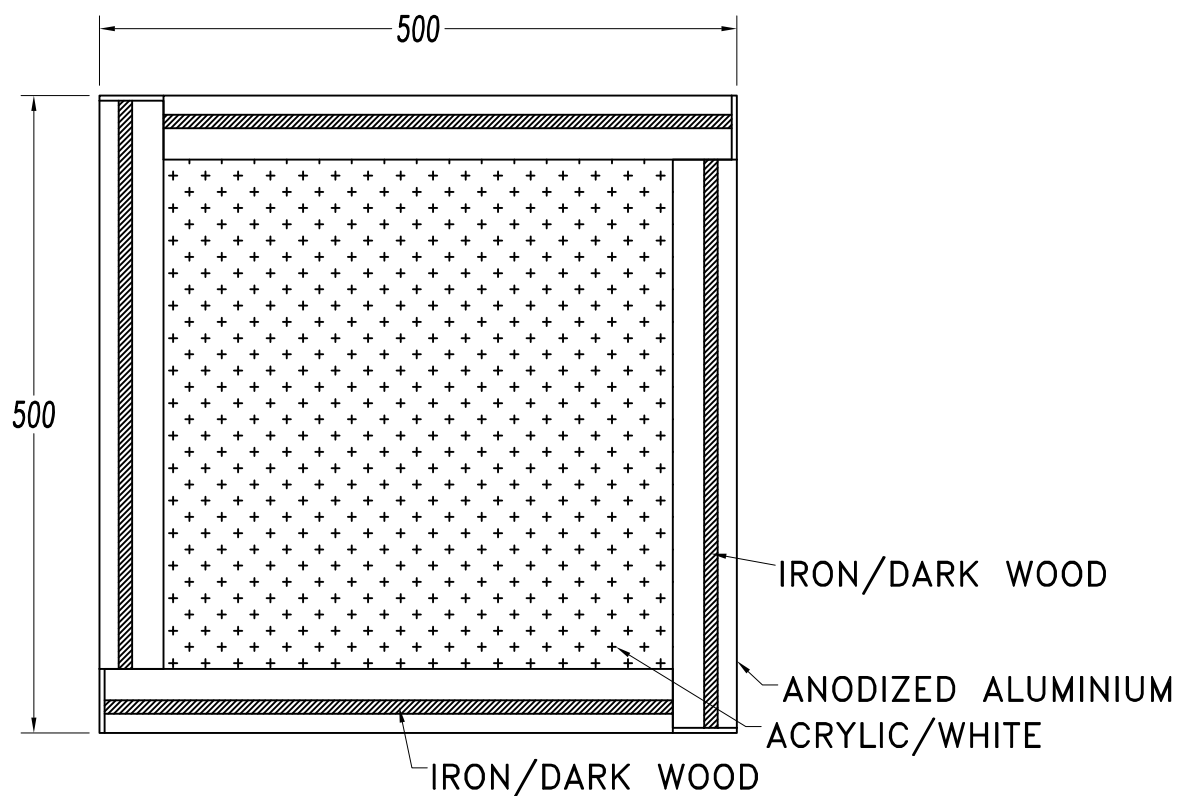


1

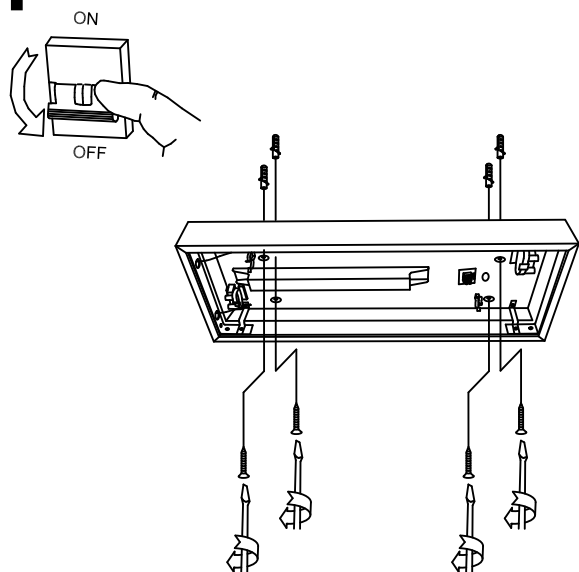


2

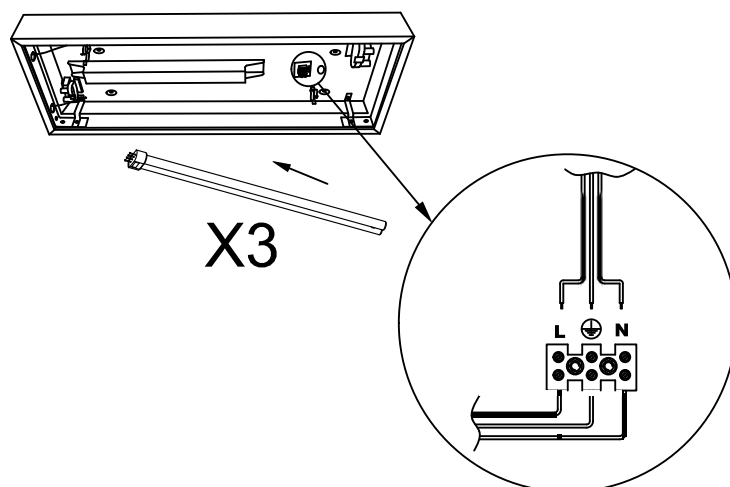


3

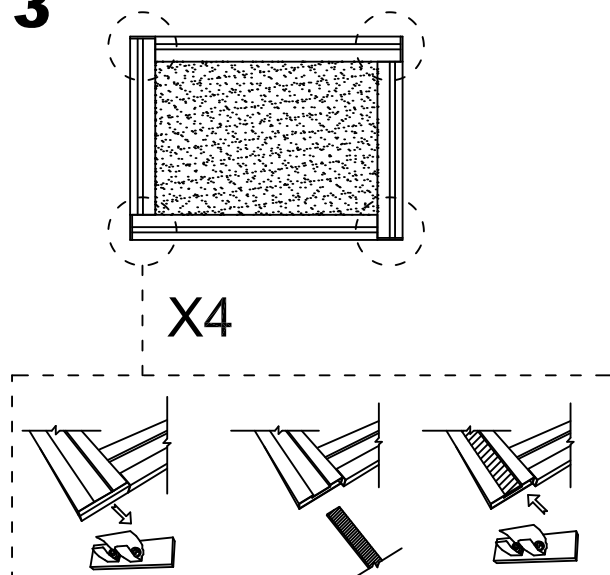

4

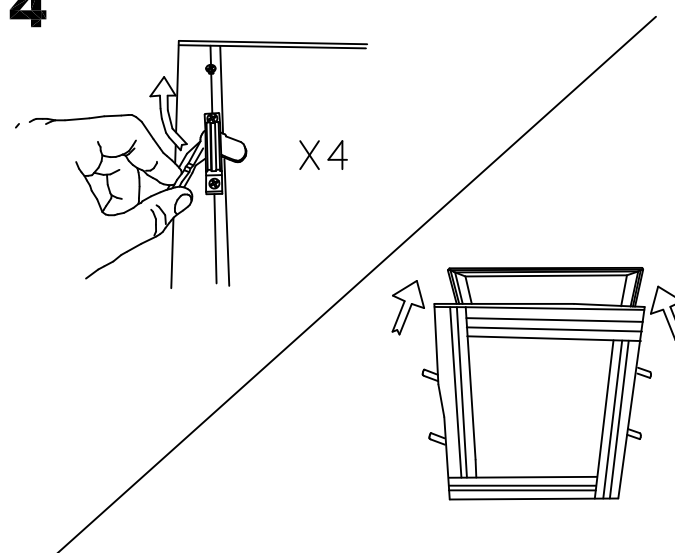

5

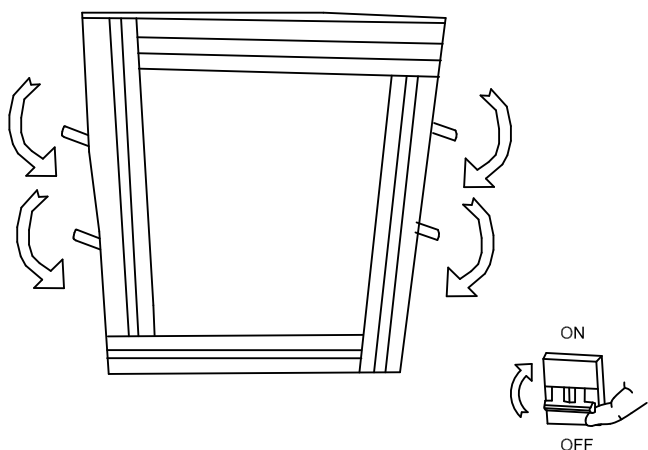

6

