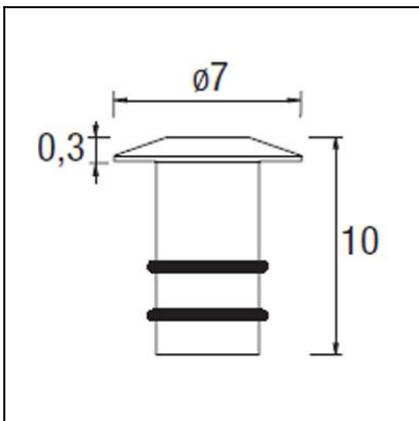


OUT 
GEA
55-9255-54-37


The photograph may not match the reference exactly. Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS

Type:	Uplight
IP Protection degrees:	IP68 (1m)
IK Protection degrees:	IK07
Recessed in-ground suitable for pedestrian crossing:	Si
Lampholder:	1 x GU4
Power (W):	GU4 max. 20W
Total power consumption (W):	20
Voltage / Frequency:	12VAC
Units per box:	8
Net Weight (Kg):	0.36
EAN:	8435111049488



MATERIALS / FINISHES
Structure material: Anodized aluminium

Diffuser material: Glass

Diffuser finish: Tempered

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

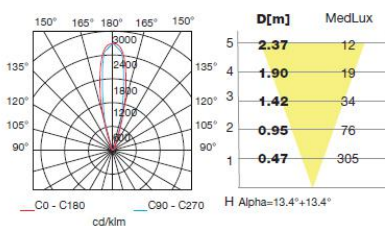

Download photometric file .ldt / .ies

71-9197-05-05





IP68 (1m)


Luminaria		Ensayo		Lámpara	
Código	55-9255-54-37	Código	55-9255-54-37	Código	55-9255-54-37
Nombre	Uplight 1xMAX 20W GU4	Nombre	Uplight 1x20W GU 4	Número	1
Familia	- LEDS-C4	Fecha	22-11-2008	Posición	UNIVERSAL
Eficiencia	66.96%	Sist. de Coorden.	C-G	Flujo Total	183.00 lm
Valor Máximo	2684.94 cd/klm	Posición	C=0.00 G=0.00	Bisimétrico	

Diam=50mm Incasso


Semiplanos C

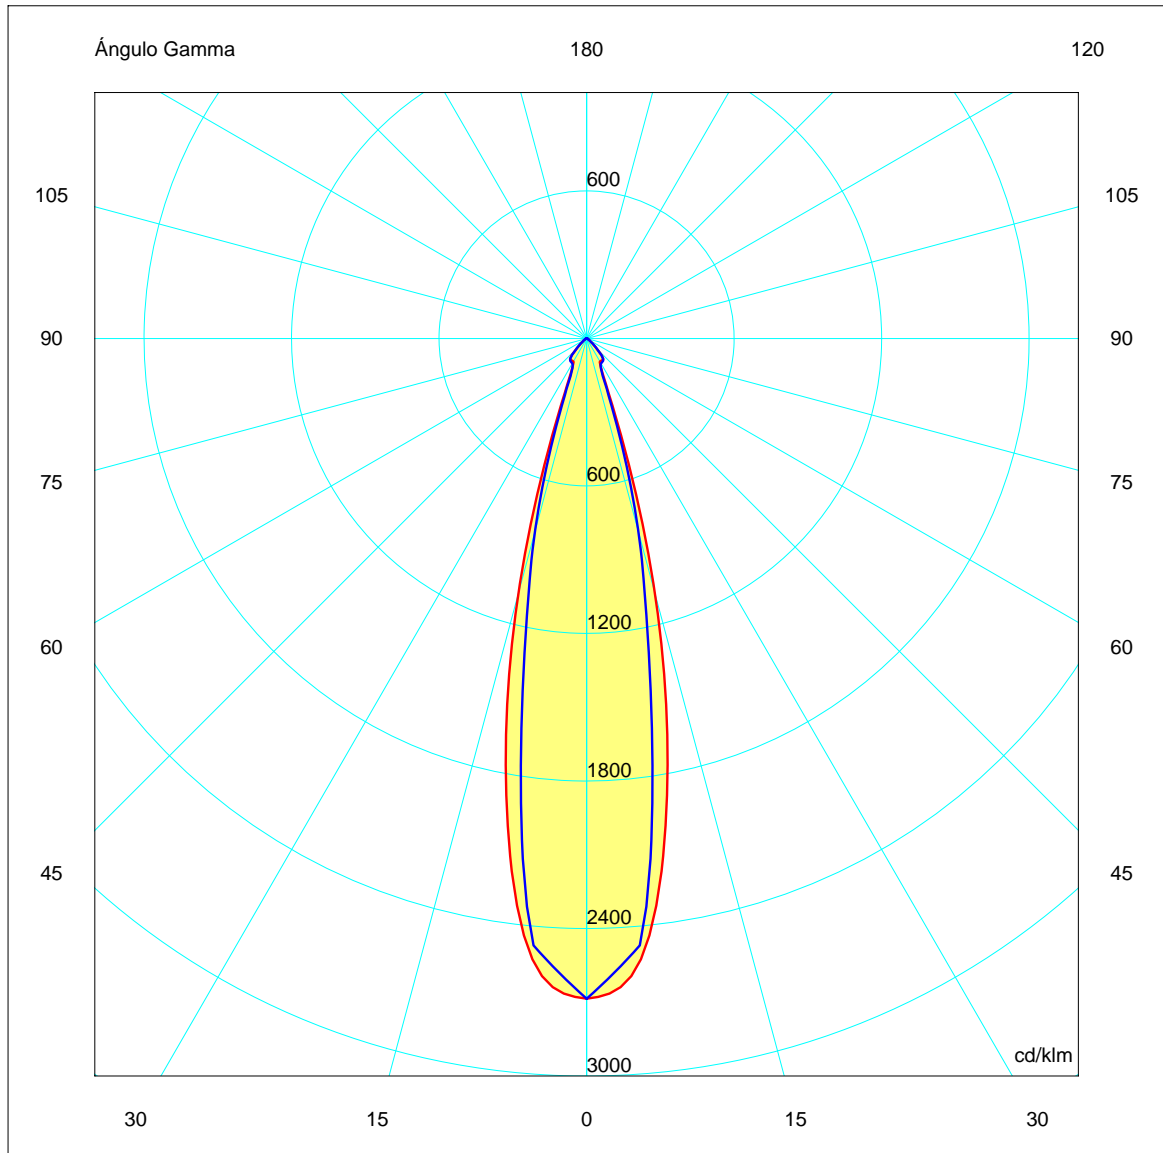


①

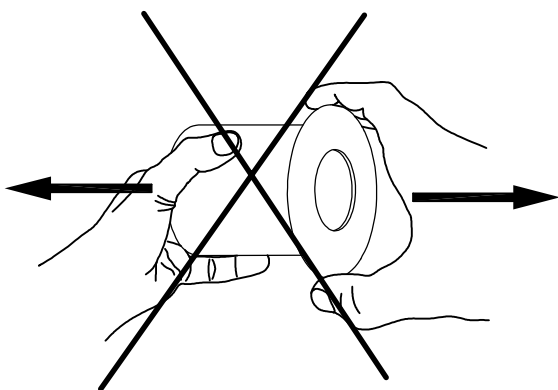


②

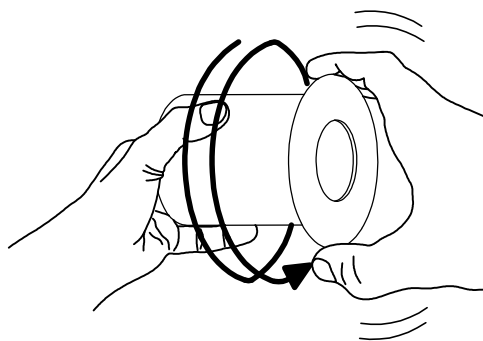


③

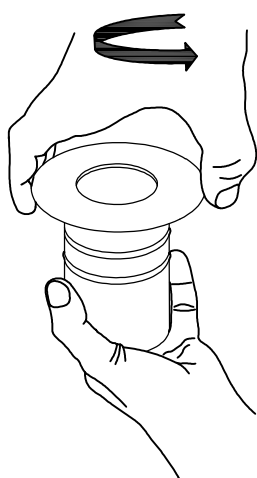

④

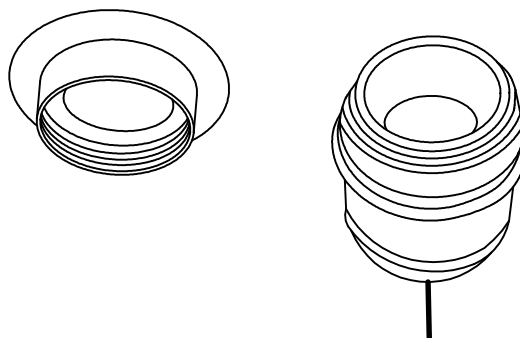

⑤

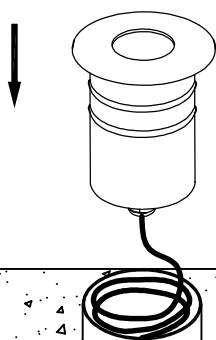

⑥

