




The photograph may not match the reference exactly. Please read the product description to identify the finish.

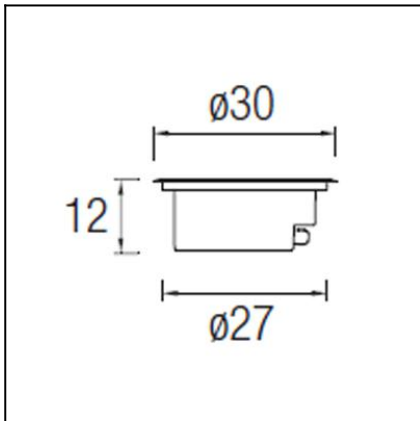


DESCRIPTION

May be flush mounted into the floor. Body produced in injected aluminium, with an AISI 304 stainless steel surround and a clear glass diffuser. For G8.5 HID 35W light source. Includes BAG electronic components. It can be rotated by $\pm 15^\circ$. Includes a 16° beam reflector and a 42° beam reflector. Its wire outlets on both sides makes it suitable for an array installation. Compact design (only 12cm deep).

TECHNICAL CHARACTERISTICS

Type:	Uplight
IP Protection degrees:	IP67
IK Protection degrees:	IK08
Lampholder:	1 x G8.5
Power (W):	G8.5 35W
Voltage / Frequency:	230V/50Hz
Units per box:	2
Net Weight (Kg):	5.7
EAN:	8435111082065



MATERIALS / FINISHES


Structure material: Stainless steel
AISI304
Injected aluminium

Diffuser material: Glass


Diffuser finish: Tempered

GEAR

Gear included: Yes, Magnetic

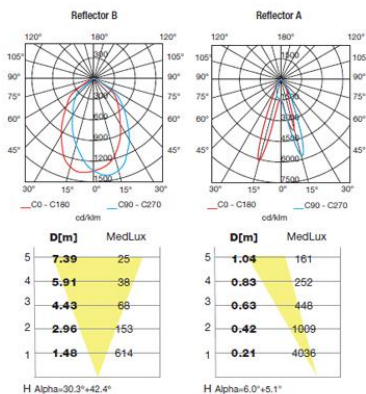

Download photometric file .ldt / .ies

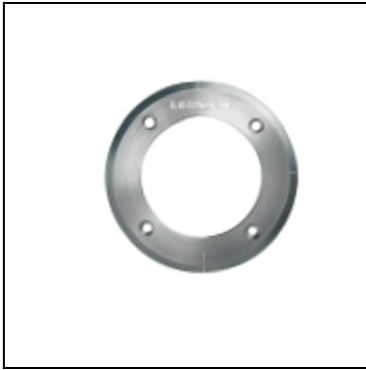71-9512-CA-CA**Structure material:** Stainless steel AISI316



Luminaire		Measurement		Lamp	
Code	55-9486-A	Code	55-9486-A	Code	MHNTD 35
Name	Uplight HCI-TL 35W NDL	Name	Uplight Ref mat HCI-TC35W NDL	Number	1
Line	- LEDS-C4	Date	28-12-2010	Position	Universal
Efficiency	63.81%	Coordinate system	C-G	Total Flux	3200.00 lm
Maximum value	1435.02 cd	Position	C=120.00 G=10.00	Asymmetrical	


Diam=300mm

C Halfplanes

180.0 — 0.0

270.0 — 90.0

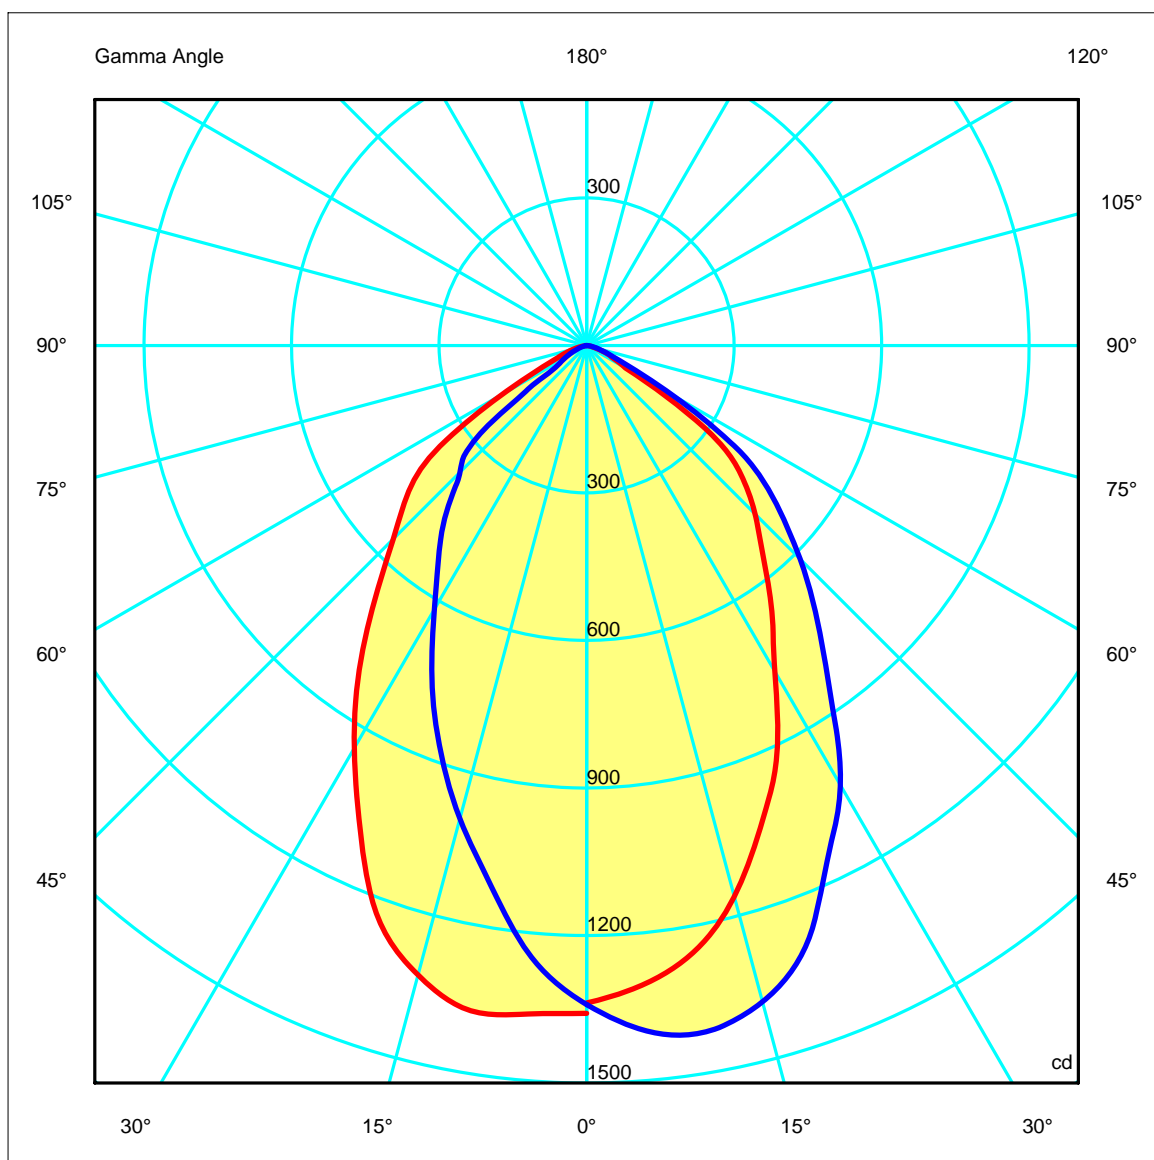

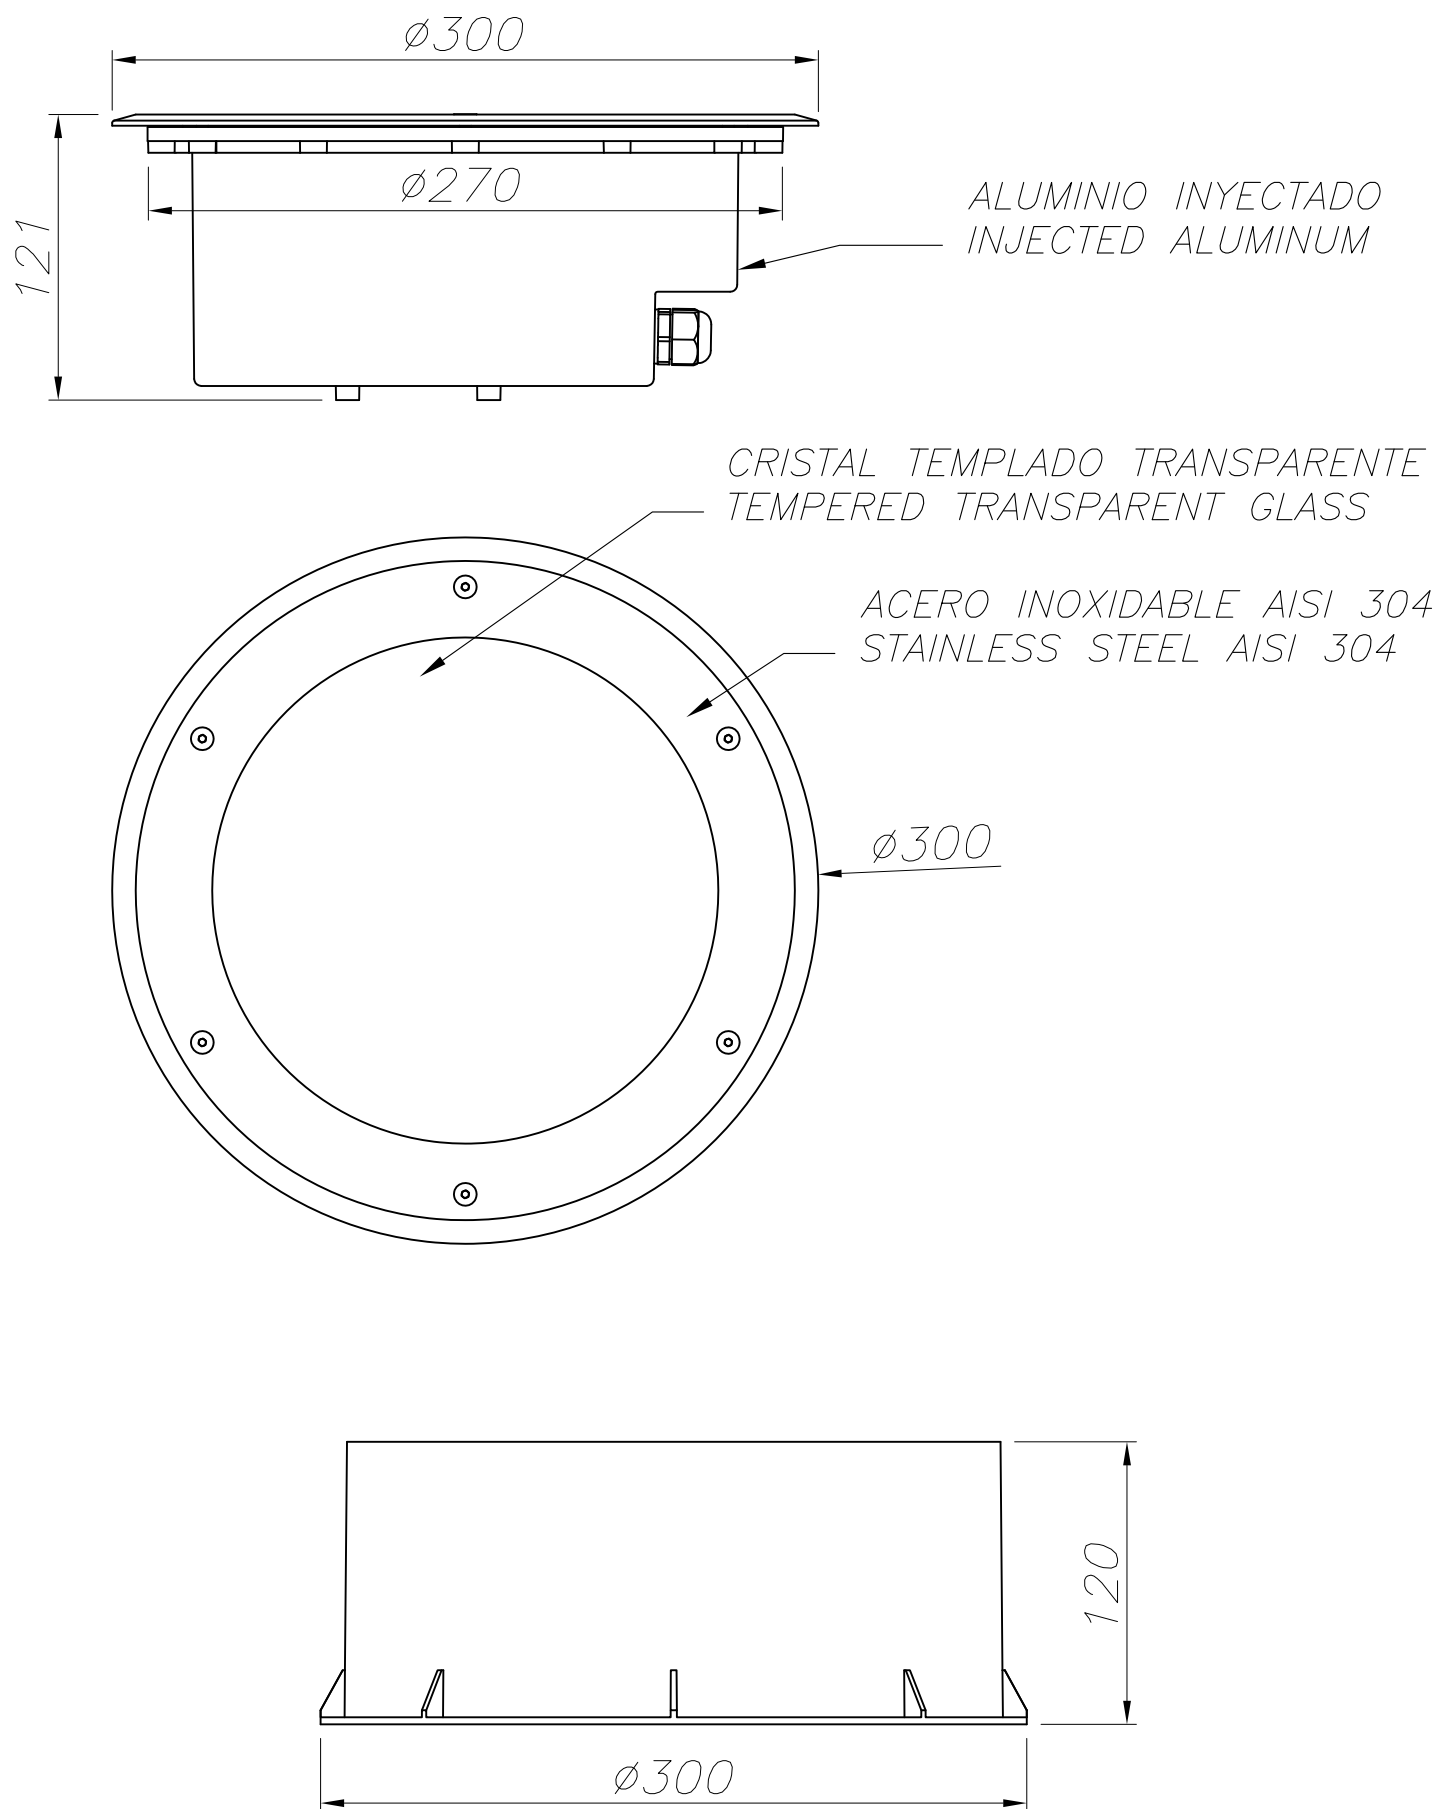

CAJA DE EMPOTRAR
FLUSH FITTING BOX

