




The photograph may not match the reference exactly. Please read the product description to identify the finish.

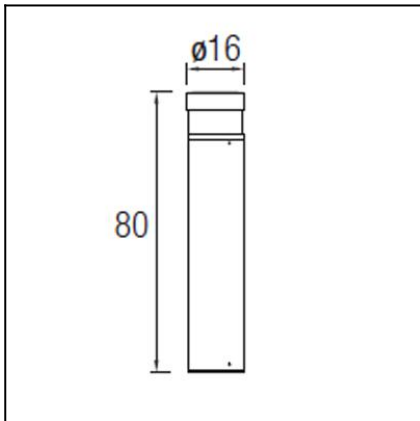


DESCRIPTION

Bollard with body produced in high grade aluminium. It comes complete with a clear polycarbonate diffuser inside and a frosted glass diffuser on the outside. Available in E-27 version for LED, compact fluorescent and halogen lamps and in HID version with 35W and 70W electronic components included. Light bulbs not included. Offered in two diameter options (16cm and 20cm) and in two finishes (light grey or dark grey).

TECHNICAL CHARACTERISTICS

Type:	Beacon
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Lampholder:	1 x E27
Power (W):	E27 MAX 23W
Total power consumption (W):	23
Voltage / Frequency:	230V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	3.42
EAN:	8435111082232,00




MATERIALS / FINISHES

Structure material: High purity aluminium

Structure finish: Urban grey

Diffuser material: Polycarbonate


Diffuser finish: Transparent

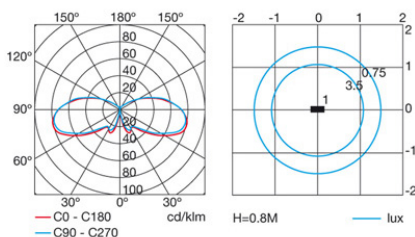

Download photometric file .ldt /.ies

Luminaria		Ensayo		Lámpara	
Código	55-9504-34-M2	Código	55-9504-34-M2	Código	PL ELECT pro23W/827
Nombre	Baliza NEWTON 23W TC-TSE opal	Nombre	Baliza NEWTON 23W TC-TSE opal	Número	1
Familia	- LEDS-C4	Fecha	05-04-2011	Posición	Universal
Rendimiento	34.42%	Sist. de Coorden.	C-G	Flujo Total	1500.00 lm
Valor Máximo	81.56 cd	Posición	C=75.00 G=80.00	Bisimétrico	
Luminaria Redonda	Diam.	160 mm	Altura	800 mm	
Área Luminosa Redonda	Diam.	160 mm	Altura	75 mm	
Área Luminosa Horizontal	0.020106 m2		Área Emisión sobre Pl. 180°	0.012000 m2	
Área Emisión sobre Pl. 0°	0.012000 m2		Área Emisión sobre Pl. 270°	0.012000 m2	
Área Emisión sobre Pl. 90°	0.012000 m2		Área de deslumbramiento a 76°	0.016508 m2	
Tipo de Simetría	Bisimétrico		Máximo Ángulo Gamma	180	
Distancia de Ensayo	6.44		Flujo de Ensayo	1500.00 lm	
Operador	Asselum T2		Voltaje de la Fuente	230.00 V	
Temperatura	20.00 °C		Corriente de la Fuente		
Humedad	50.00 %		Fotocélula	PRC	
Notas					
Lámparas de la Luminaria					
Familia	Código	Nombre	Flujo lm	Pot. W	Cant.
PHILIPS 2005 ILCOS FBT,G,C,FSQ	PL ELECT pro23W/827	PL electr pro 23W/827 E27	1500.00	23.00	1
C.I.E.	11 31 64 64 34	D DIN 5040		B11	
F UTE	--	B NBN		BZ 10	


Diam=160mm





Semiplanos C

180.0 — 0.0
270.0 — 90.0

ULOR 12.48 %
DLOR 21.93 %
RN 36.27 %

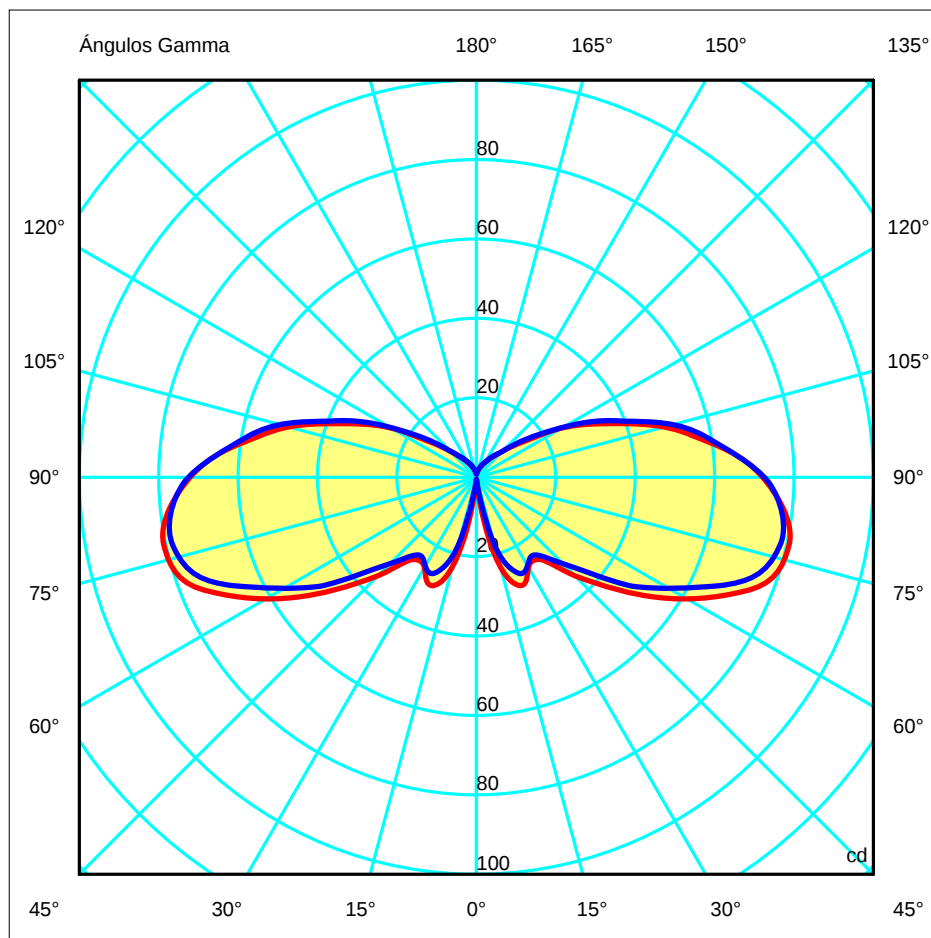

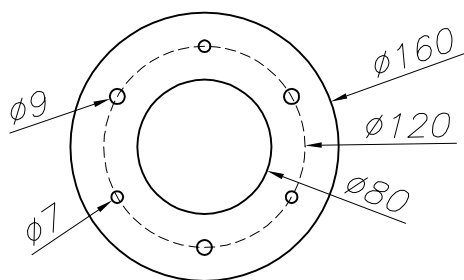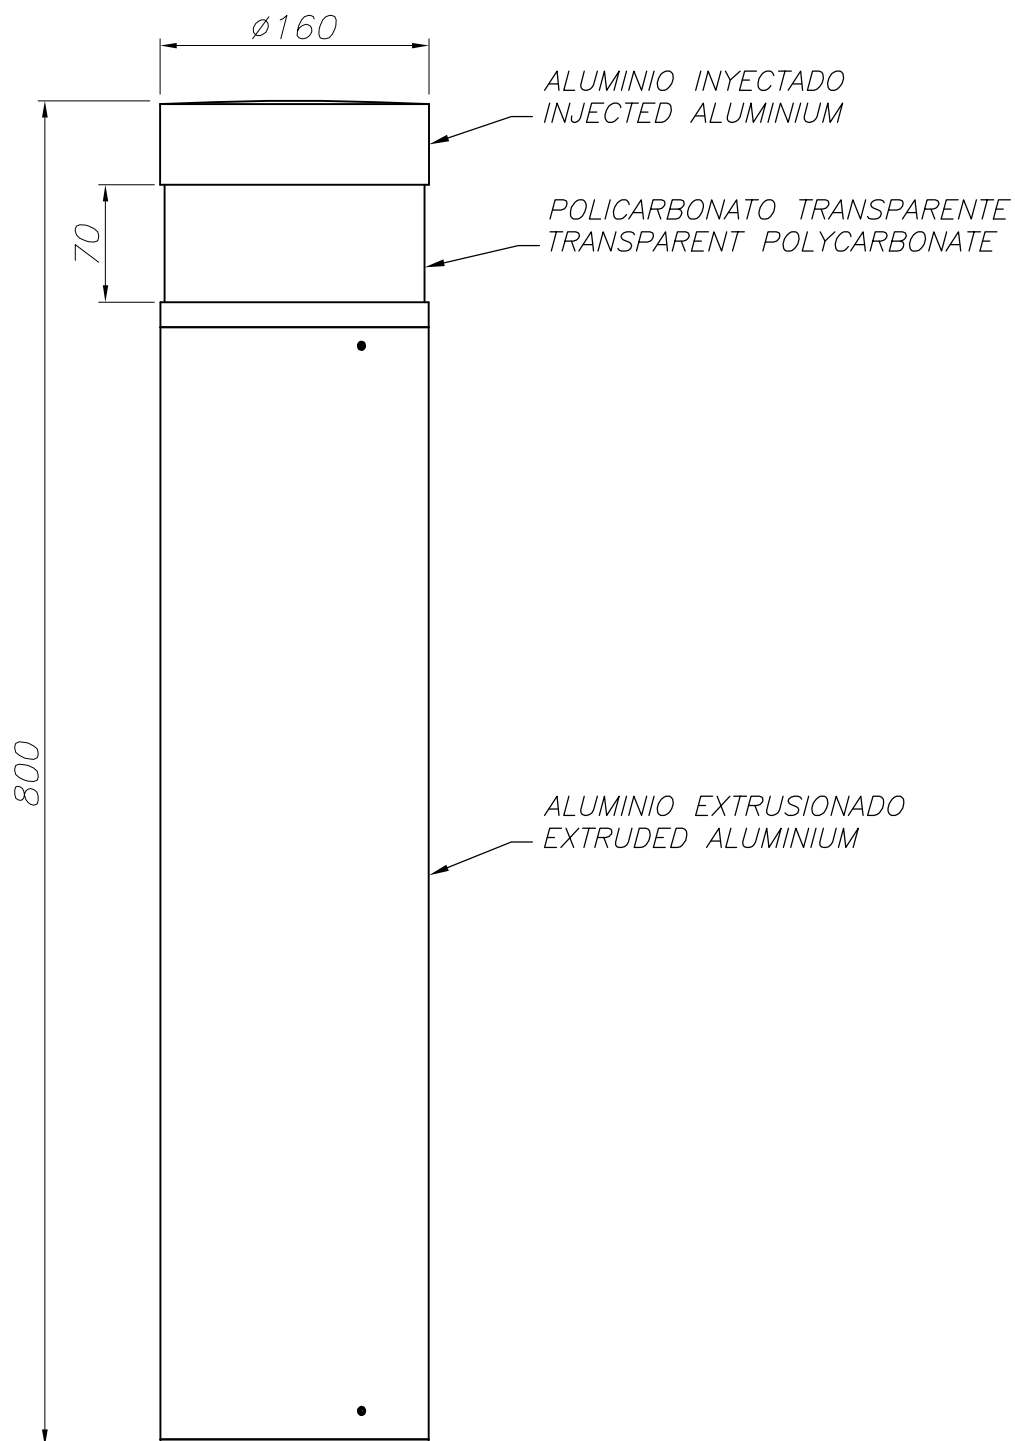

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

