




The photograph may not match the reference exactly. Please read the product description to identify the finish.

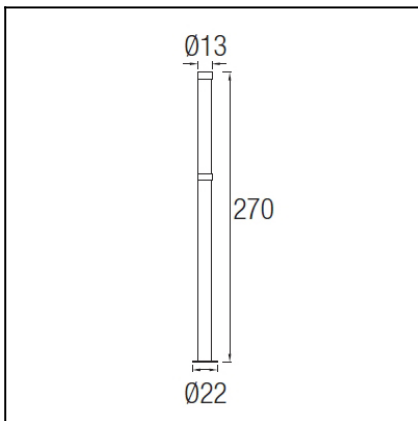


Download photometric file .ldt /.ies

DESCRIPTION

Lamp post produced in extruded aluminium with an opal polycarbonate diffuser. For two compact T5 21W or 39W fluorescent lamps (not supplied). BAG electronic components included.

TECHNICAL CHARACTERISTICS

Type:	Streetlight
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Lampholder:	2 x G5
Power (W):	G5 21/39
Total power consumption (W):	75.1
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	7.355
EAN:	8435381402426,00


MATERIALS / FINISHES

Structure material: Extruded aluminium
Structure finish: Grey

Diffuser material: Polycarbonate
Diffuser finish: Opal


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp	
Code	55-9670-34-M1	Code	55-9670-34-M1	Code	TL5 HE sup80 21W/840
Name	Baliza LYON 2X21W T5 opal	Name	Baliza LYON 2x21W T5 opal	Number	2
Line	- LEDS-C4	Date	02-04-2013	Position	Universal
Efficiency	88.51%	Coordinate system	CG	Total Flux	4200.00 lm
Maximum value	429.11 cd	Position	C=30.00 G=90.00	Double Symmetrical	
Round Luminaire	Diam.	130 mm	Height	2700 mm	
Round Luminous Area	Diam.	130 mm	Height	816 mm	
Horizontal Luminous Area	0.013273 m2	Emitting area on Plane 180°	0.106080 m2		
Emitting area on Plane 0°	0.106080 m2	Emitting area on Plane 270°	0.106080 m2		
Emitting area on Plane 90°	0.106080 m2	Glare area at 76°	0.106140 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	180		
Measurement Distance	6.44	Measurement Flux	4200.00 lm		
Operator	Asselum T2	Source voltage	230.00 V		
Temperature	20.00 °C	Source current			
Humidity	54.00 %	Photocell	PRC		
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
PHILIPS 2005 ILCOS FD,FC	TL5 HE sup80 21W/840	MASTER TL5 HE super80 21W/840	2100.00	21.00	2
C.I.E.	11 34 66 48 89	D DIN 5040	C12		
F UTE	--	B NBN	BZ 10		

Diam=130mm



C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 45.59 %
 DLOR 42.93 %
 RN 51.50 %

