


OUT 

CILIN

55-9706-Z5-CD




The photograph may not match the reference exactly. Please read the product description to identify the finish.

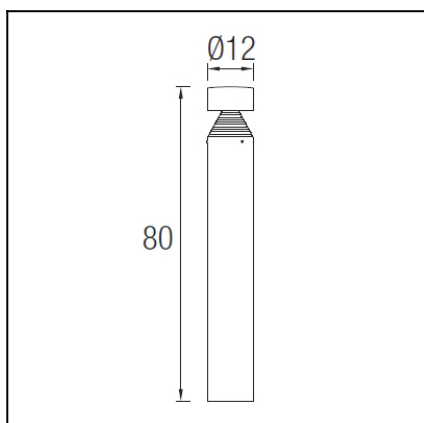

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Beacon
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Bulb:	9 x LED Cree. Warm White - 3000K
Power (W):	9
Total power consumption (W):	115
Luminous efficacy (Lm/W):	94
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	2
Net Weight (Kg):	2.75
EAN:	8435381402259,00



MATERIALS / FINISHES

Structure material:	High purity aluminium	Diffuser material:	Polycarbonate
Structure finish:	Urban grey	Diffuser finish:	Matt

GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Report No.:

Test Time: 2013-1-18 15:36

Luminaire Property

Luminaire Manufacturer: LEDS-C4
Luminaire Category:
Lamp Catalog:
Number of Lamps: 9
Luminous Length (mm): 380
Luminous Height (mm): 8
Current: 0.105 A
Power Factor: 0.509

Luminaire Description: 55-9706
Lamp Description: LED
Lumens per Lamp: 100
Luminous Width (mm): 40
Voltage: 220.9 V
Power: 11.90 W


Photometric Results

CIE Class: Direct
Measurement Flux: 220.7 lm
Downward Ratio: 24.22%
Field Angle: H162.8 V162.8
Luminaire Efficacy Rating (LER): 19
Max. Intensity: 68.05 cd

Total Rated Lamp Lumens: 900.0 lm
Efficiency: 24.52%
Upward Ratio: 0.31%
Beam Angle: H131.9 V131.9
Central Intensity: 0.18 cd
Pos of Max. Intensity: H45 V37

Picture Of Luminaire ...

Luminous Intensity Distribution Curve


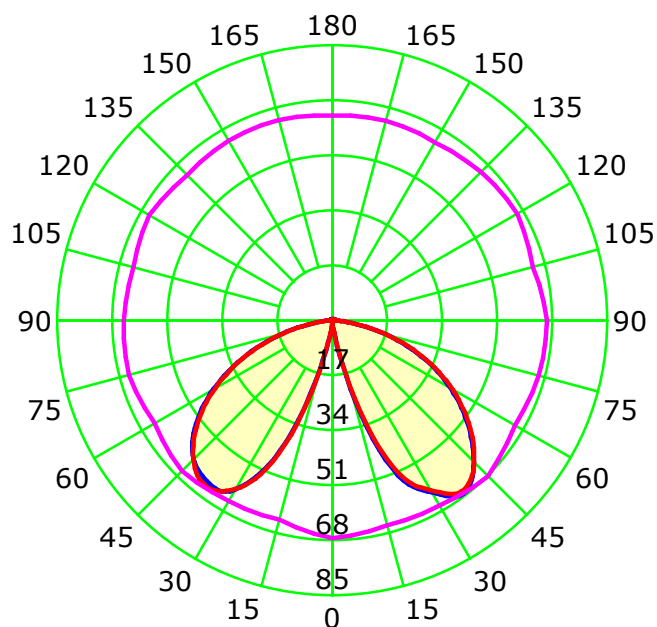


Unit: cd

— C0-C180 — C90-C270 — G37

C Plane (°):0.0-360.0: 15.0
Test Lab: INVENTFINE
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 2.923 m
Humidity:
Inspector:

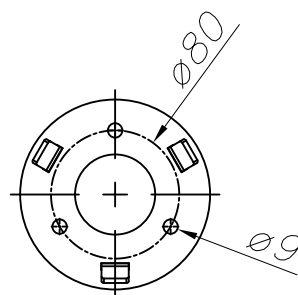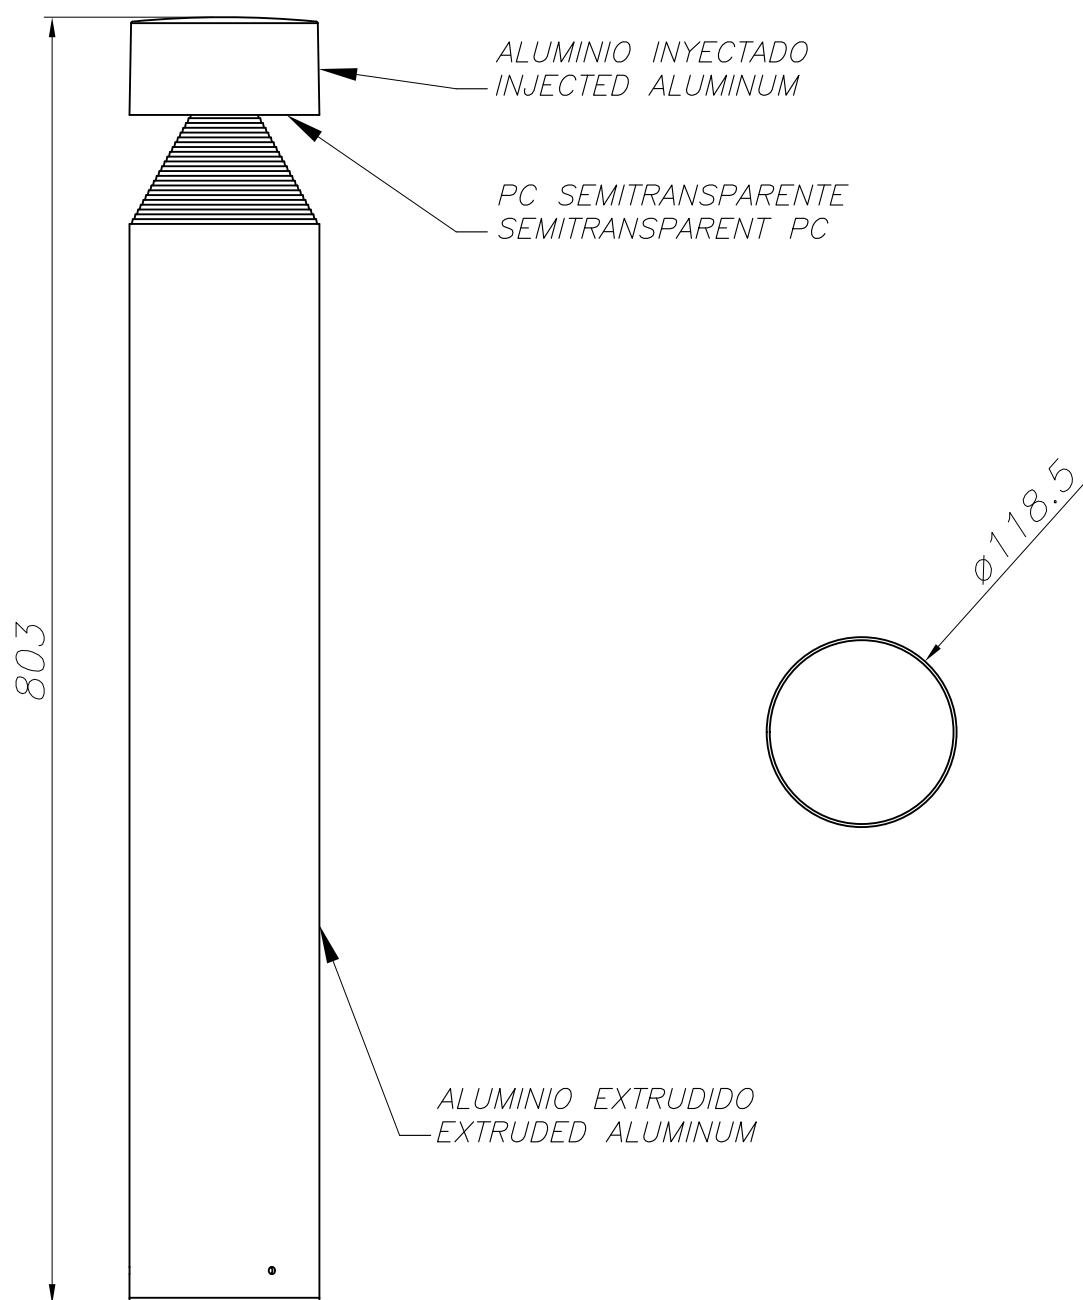

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

