



# MINI FRAME ACT-9142-14-T2

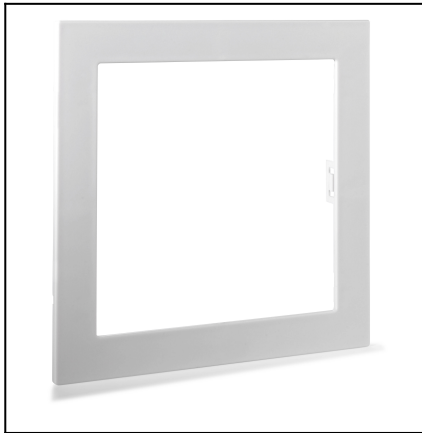

The photograph may not match the reference exactly. Please read the product description to identify the finish.

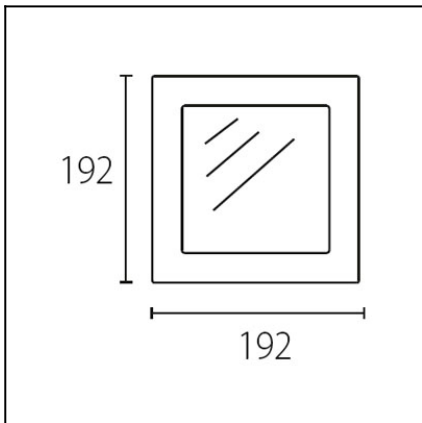

[Download photometric file .ldt /.ies](#)

## TECHNICAL CHARACTERISTICS

Type:	Accessory
IP Protection degrees:	IP54
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	0.22
EAN:	8435111095973,00



## MATERIALS / FINISHES

**Structure material:** Polycarbonate

**Diffuser material:** Tempered glass

**Structure finish:** White

**Diffuser finish:** Partly-sandblasted

Report No.:

Test Time: 2012-8-28 18:23

## Luminaire Property

Luminaire Manufacturer: leds-c4  
 Luminaire Category: ACT-9142  
 Lamp Catalog: CFL  
 Number of Lamps: 1  
 Luminous Length (mm): 200  
 Luminous Height (mm): 120  
 Current: 0.085 A  
 Power Factor: 0.957

Luminaire Description: MINI FRAME  
 Lamp Description: G24Q  
 Lumens per Lamp: 1200  
 Luminous Width (mm): 200  
 Voltage: 221.1 V  
 Power: 18.20 W

## Photometric Results


CIE Class: Direct  
 Measurement Flux: 555 lm  
 Downward Ratio: 45.57%  
 Field Angle: H132.0 V141.9  
 Luminaire Efficacy Rating (LER): 30  
 Max. Intensity: 243.45 cd

Total Rated Lamp Lumens: 1200.0 lm  
 Efficiency: 46.25%  
 Upward Ratio: 0.68%  
 Beam Angle: H71.2 V112.0  
 Central Intensity: 223.68 cd  
 Pos of Max. Intensity: H30 V8

Picture Of Luminaire



Luminous Intensity Distribution Curve

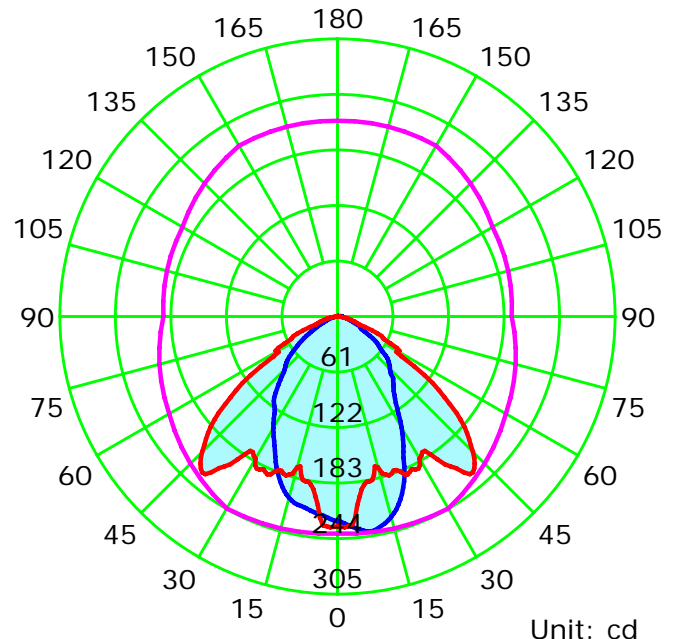

Average Diffuse Angle(50%): 91.6°

— C0-C180 — C90-C270 — G8

C Plane (°):0.0-180.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:


Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 4.755 m


Humidity:

Inspector:

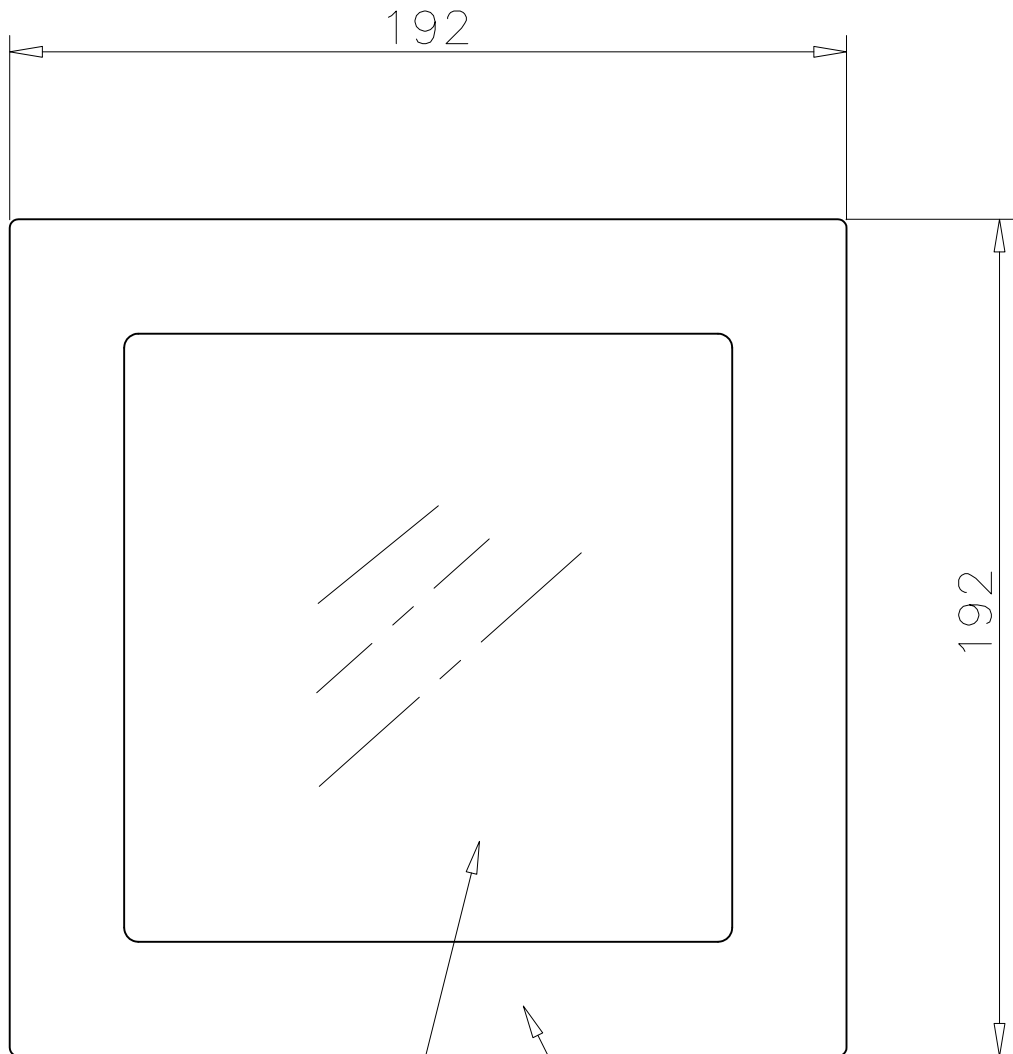

SEMIFROSTED GLASS/  
CRISTAL SEMI ARENADO

SAND PC/WHITE/GREY

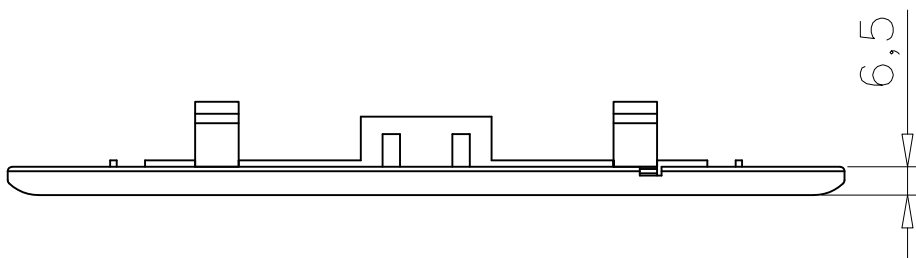

***NO***

***APLICA***