


MINI FRAME ACT-9146-14-H6



The photograph may not match the reference exactly. Please read the product description to identify the finish.

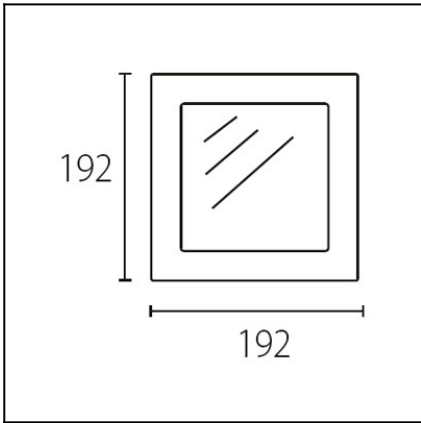

[Download photometric file .ldt /.ies](#)

TECHNICAL CHARACTERISTICS

Type:	Accessory
IP Protection degrees:	IP54
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	0.22
EAN:	8435111096055,00



MATERIALS / FINISHES

Structure material: Polycarbonate

Diffuser material: Tempered glass

Structure finish: White

Diffuser finish: Silkscreened

Report No.:

Test Time: 2012-8-28 18:04

Luminaire Property

Luminaire Manufacturer: leds-c4
 Luminaire Category: ACT-9146
 Lamp Catalog: CFL
 Number of Lamps: 1
 Luminous Length (mm): 200
 Luminous Height (mm): 120
 Current: 0.085 A
 Power Factor: 0.957

Luminaire Description: MINI FRAME
 Lamp Description: G24Q
 Lumens per Lamp: 1200
 Luminous Width (mm): 200
 Voltage: 221.2 V
 Power: 18.20 W

Photometric Results


CIE Class: Direct
 Measurement Flux: 512.8 lm
 Downward Ratio: 42.05%
 Field Angle: H130.8 V137.6
 Luminaire Efficacy Rating (LER): 28
 Max. Intensity: 222.23 cd

Total Rated Lamp Lumens: 1200.0 lm
 Efficiency: 42.74%
 Upward Ratio: 0.68%
 Beam Angle: H71.0 V118.0
 Central Intensity: 217.42 cd
 Pos of Max. Intensity: H30 V6

Picture Of Luminaire



Luminous Intensity Distribution Curve

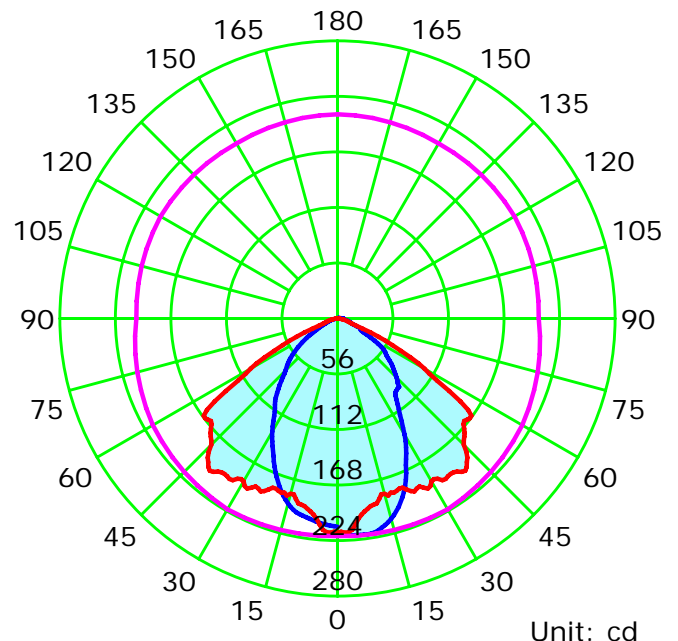


Average Diffuse Angle(50%): 94.5°

— C0-C180 — C90-C270 — G6


C Plane (°):0.0-180.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 4.755 m
 Humidity:
 Inspector:

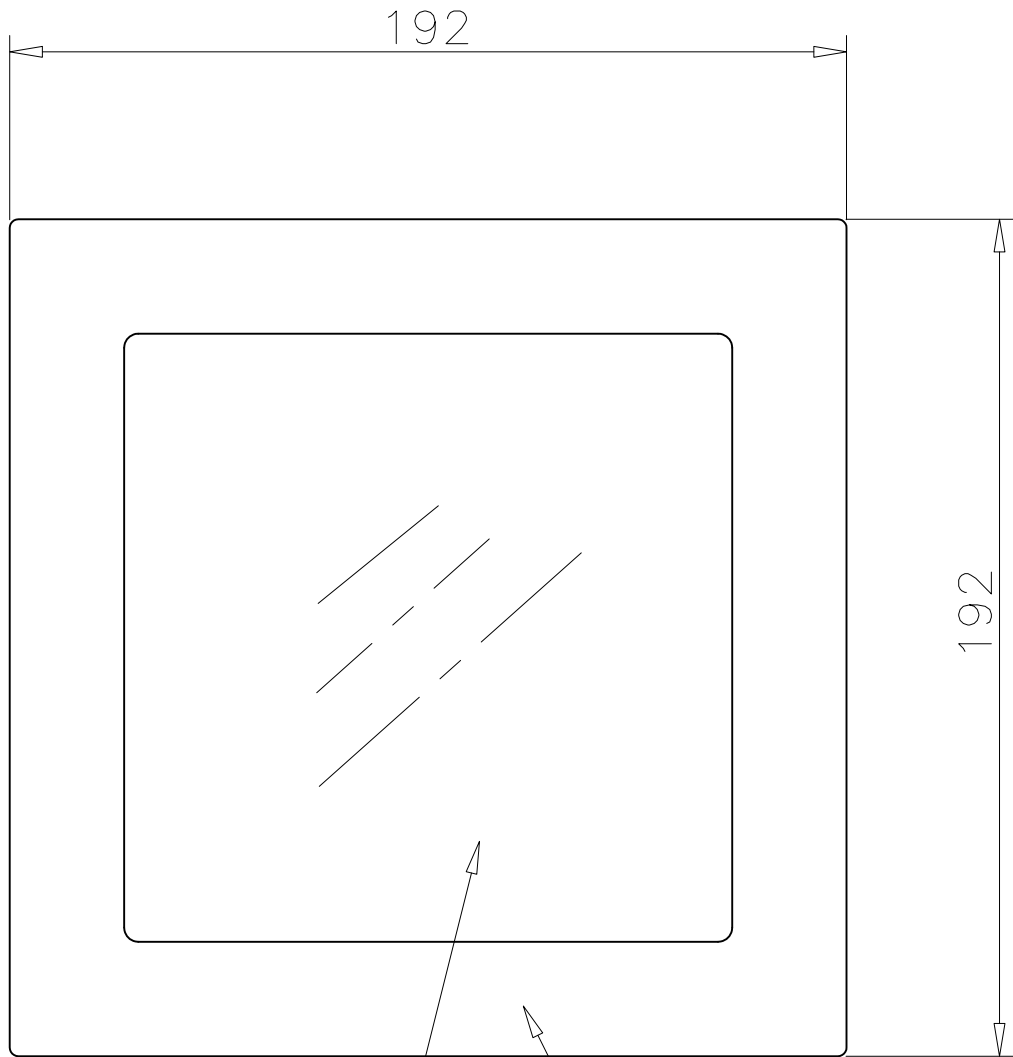

SERIGRAPHY GLASS/
CRISTAL SERIGRAFIADO

SAND PC/WHITE/GREY

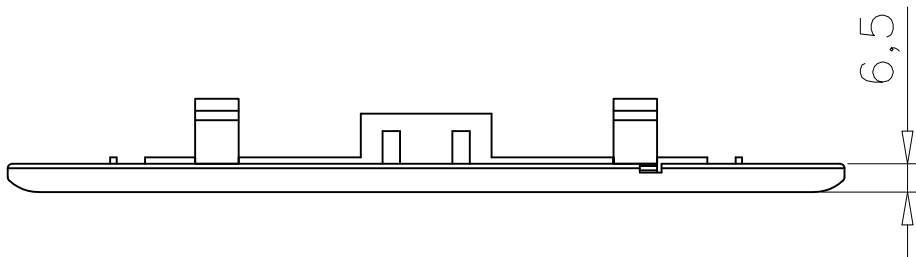

NO

APLICA