



# MINI FRAME

## ACT-9146-N3-H6

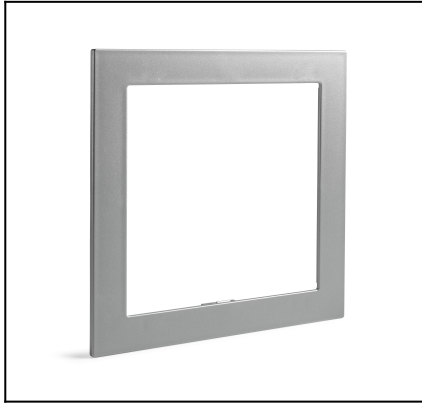

The photograph may not match the reference exactly. Please read the product description to identify the finish.

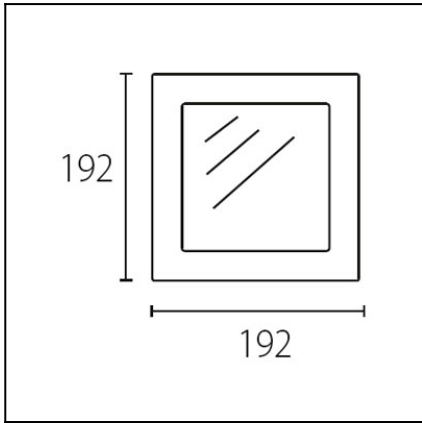

[Download photometric file .ldt /.ies](#)

### TECHNICAL CHARACTERISTICS

Type:	Accessory
IP Protection degrees:	IP54
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	0.22
EAN:	8435111096062,00



### MATERIALS / FINISHES

**Structure material:** Polycarbonate

**Diffuser material:** Tempered glass

**Structure finish:** Grey

**Diffuser finish:** Silkscreened

Report No.:

Test Time: 2012-8-28 18:04

## Luminaire Property

Luminaire Manufacturer: leds-c4  
 Luminaire Category: ACT-9146  
 Lamp Catalog: CFL  
 Number of Lamps: 1  
 Luminous Length (mm): 200  
 Luminous Height (mm): 120  
 Current: 0.085 A  
 Power Factor: 0.957

Luminaire Description: MINI FRAME  
 Lamp Description: G24Q  
 Lumens per Lamp: 1200  
 Luminous Width (mm): 200  
 Voltage: 221.2 V  
 Power: 18.20 W

## Photometric Results


CIE Class: Direct  
 Measurement Flux: 512.8 lm  
 Downward Ratio: 42.05%  
 Field Angle: H130.8 V137.6  
 Luminaire Efficacy Rating (LER): 28  
 Max. Intensity: 222.23 cd

Total Rated Lamp Lumens: 1200.0 lm  
 Efficiency: 42.74%  
 Upward Ratio: 0.68%  
 Beam Angle: H71.0 V118.0  
 Central Intensity: 217.42 cd  
 Pos of Max. Intensity: H30 V6

Picture Of Luminaire



Luminous Intensity Distribution Curve

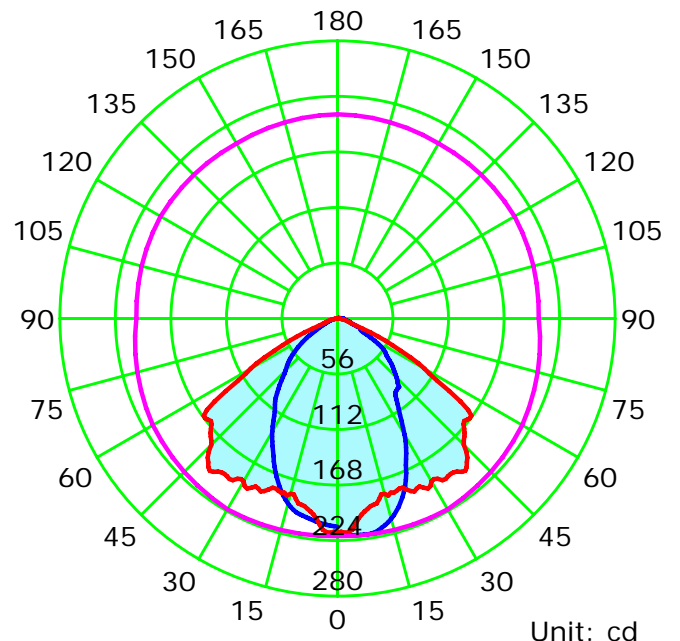


Average Diffuse Angle(50%): 94.5°

— C0-C180 — C90-C270 — G6


C Plane (°):0.0-180.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 4.755 m  
 Humidity:  
 Inspector:

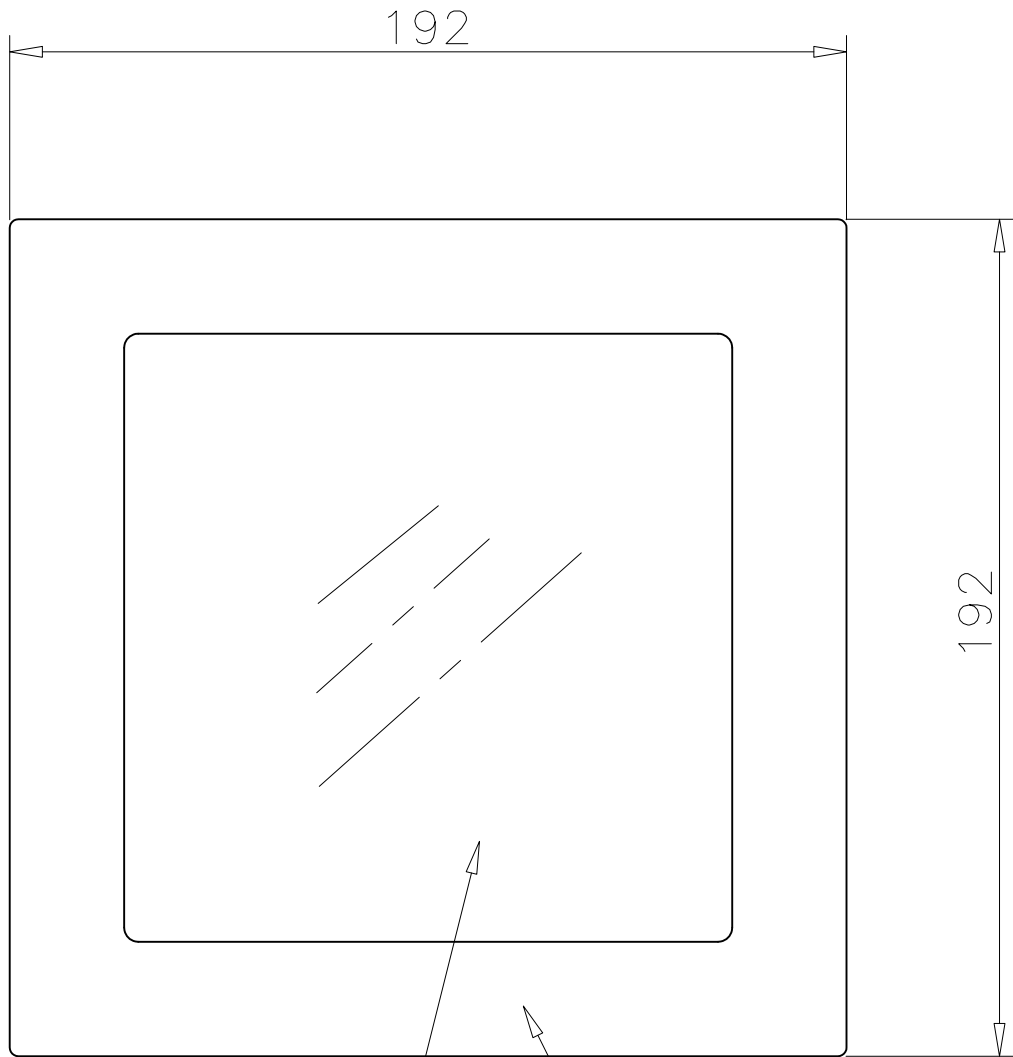

SERIGRAPHY GLASS/  
CRISTAL SERIGRAFIADO

SAND PC/WHITE/GREY

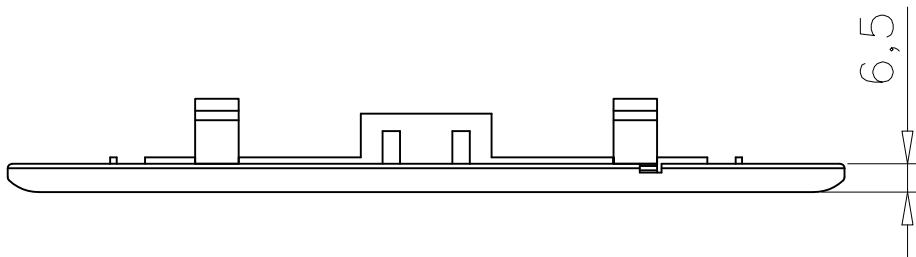

***NO***

***APLICA***