



The photograph may not match the reference exactly. Please read the product description to identify the finish.

[Download photometric file .ldt /.ies](#)

TECHNICAL CHARACTERISTICS

Type:	Accessory
IP Protection degrees:	IP54
Warranty (Years):	2
Units per box:	20
Net Weight (Kg):	0.29
EAN:	8435111092910,00



MATERIALS / FINISHES

Structure material: Polycarbonate

Diffuser material: Glass

Structure finish: Grey

Diffuser finish: Sandblasted

Report No.:

Test Time: 2012-9-13 09:57

Luminaire Property

Luminaire Manufacturer: Leds-c4
 Luminaire Category: ACT-9171
 Lamp Catalog: CFL
 Number of Lamps: 2
 Luminous Length (mm): 200 mm
 Luminous Height (mm): 120 mm
 Current: 0.205 A
 Power Factor: 0.979


Luminaire Description: ROL
 Lamp Description: G24Q
 Lumens per Lamp: 1200.0 lm
 Luminous Width (mm): 200mm
 Voltage: 220.8 V
 Power: 44.30 W

Photometric Results


CIE Class: Direct
 Measurement Flux: 1264.4 lm
 Downward Ratio: 48.87%
 Field Angle: H215.4 V160.4
 Luminaire Efficacy Rating (LER): 29
 Max. Intensity: 554.09 cd

Total Rated Lamp Lumens: 2400.0 lm
 Efficiency: 52.69%
 Upward Ratio: 3.81%
 Beam Angle: H91.9 V108.7
 Central Intensity: 544.08 cd
 Pos of Max. Intensity: H0 V8

Picture Of Luminaire



Luminous Intensity Distribution Curve

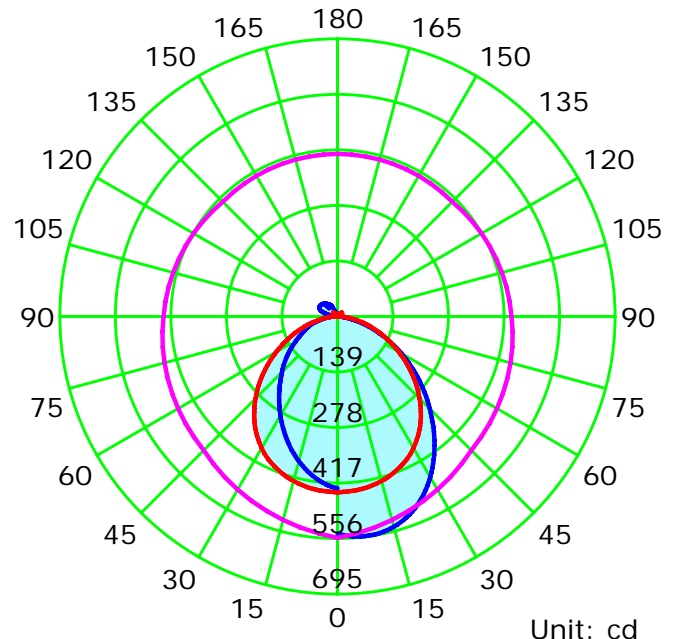

Average Diffuse Angle(50%): 100.3°

— C0-C180 — C90-C270 — G8

C Plane (°):0.0-180.0: 45.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 4.755 m
 Humidity:
 Inspector:

