



The photograph may not match the reference exactly. Please read the product description to identify the finish.



Download photometric file .ldt /.ies

**TECHNICAL CHARACTERISTICS**

Type:	Accessory
IP Protection degrees:	IP54
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	0.295
EAN:	8435111097076,00


**MATERIALS / FINISHES**

**Structure material:** Polycarbonate

**Diffuser material:** Glass

**Structure finish:** White

**Diffuser finish:** Silkscreened

Report No.:

Test Time: 2012-9-13 10:29

## Luminaire Property

Luminaire Manufacturer: leds-c4  
 Luminaire Category: ACT-9173  
 Lamp Catalog: CFL  
 Number of Lamps: 2  
 Luminous Length (mm): 200 mm  
 Luminous Height (mm): 120 mm  
 Current: 0.197A  
 Power Factor: 0.98


Luminaire Description: ROL  
 Lamp Description: G24Q  
 Lumens per Lamp: 1200.0 lm  
 Luminous Width (mm): 200 mm  
 Voltage: 220V  
 Power: 42.90 W

## Photometric Results


CIE Class: Direct  
 Measurement Flux: 1468 lm  
 Downward Ratio: 57.94%  
 Field Angle: H201.5 V151.9  
 Luminaire Efficacy Rating (LER): 34  
 Max. Intensity: 529.89 cd

Total Rated Lamp Lumens: 2400.0 lm  
 Efficiency: 61.17%  
 Upward Ratio: 3.23%  
 Beam Angle: H98.0 V120.2  
 Central Intensity: 529.13 cd  
 Pos of Max. Intensity: H180 V15

Picture Of Luminaire



Luminous Intensity Distribution Curve

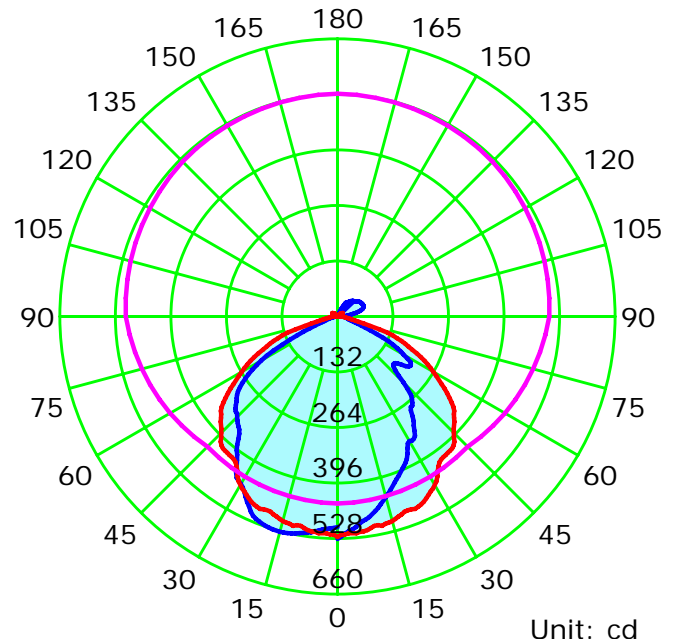

Average Diffuse Angle(50%): 109.1°

— C0-C180 — C90-C270 — G15

C Plane (°):0.0-180.0: 45.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 4.755 m

Humidity:

Inspector: