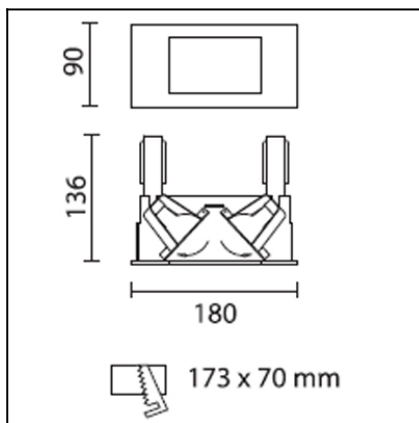
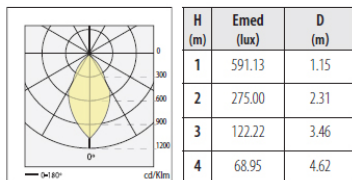




The photograph may not match the reference exactly. Please read the product description to identify the finish.



n° 08
QR-CBC51 50W 60°
η=100 %



DESCRIPTION

Small group of recessed downlights offering high visual comfort. Round or square black lacquered steel body, grey finished metallic surround. Stainless steel mounting springs highly resistant to mechanical deformation. Available for halogen lamps and LED lamps, can be rotated on a 40° vertical angle. Mounting clips included in the unit can be adjusted without the need for additional tools.

TECHNICAL CHARACTERISTICS

Type:	Downlight
Adjustable $\pm 20^\circ$ on the horizontal axis.	
IP Protection degrees:	IP23
Lampholder:	2 x GU5.3
Power (W):	GU5.3 50
Voltage / Frequency:	12V/50Hz
Warranty (Years):	2
Units per box:	20
Net Weight (Kg):	0.57
EAN:	8435111037805,00



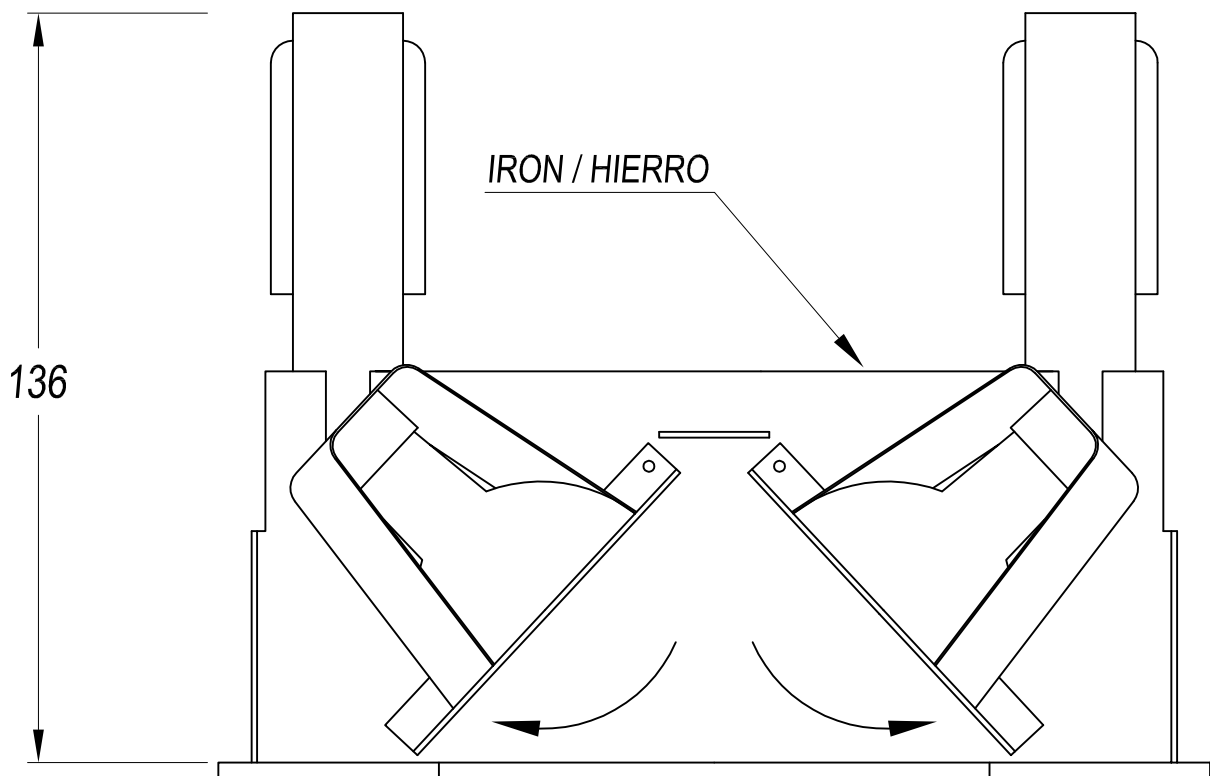
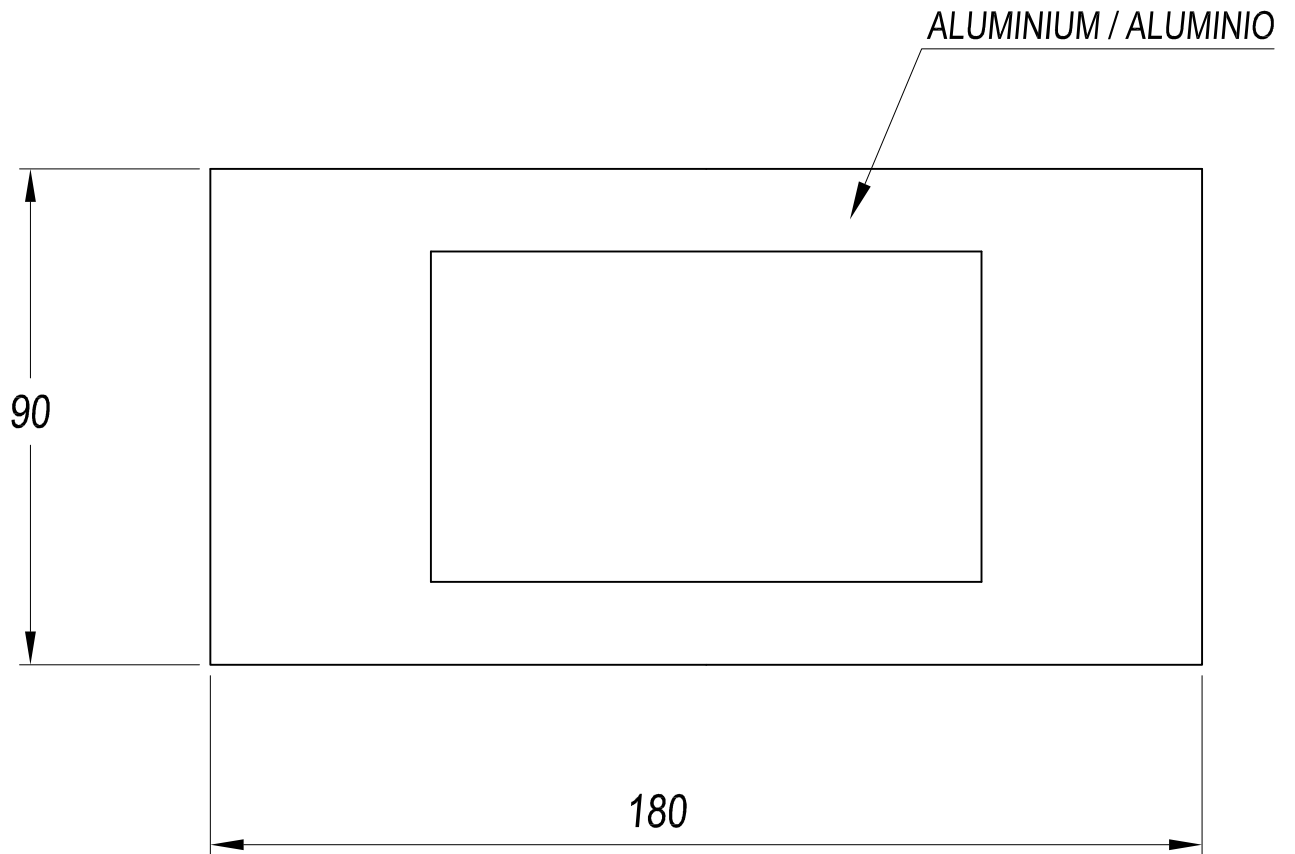
MATERIALS / FINISHES

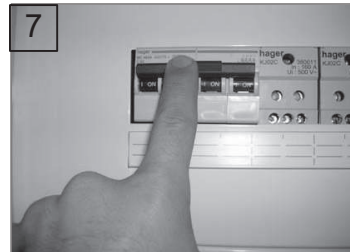
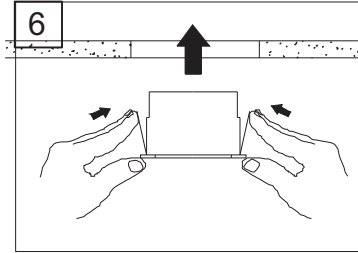
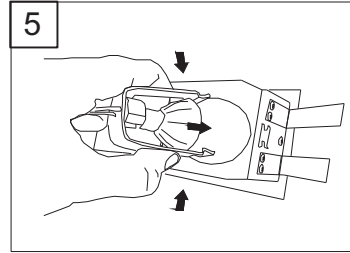
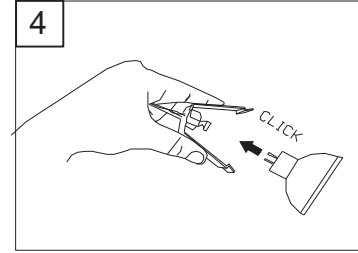
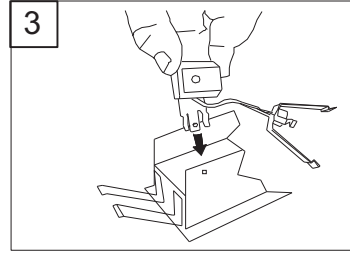
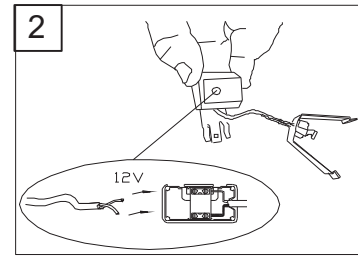
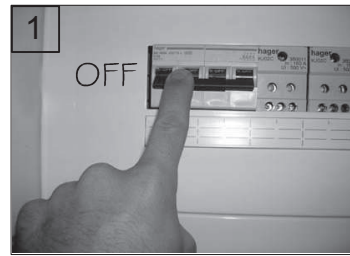
Structure material:	Steel Aluminium
Structure finish:	Black lacquered Grey












GEAR


Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt / .ies





REF.		LAMP	SOCKET		
DM-0048-N3-00	83x70	QR-CBC51 1x50W max.	GU 5.3		
DM-0049-N3-00	173x70	QR-CBC51 1x50W max.	GU 5.3		
DM-0050-N3-00	173x70	QR-CBC51 2x50W max.	GU 5.3		
DM-0051-N3-00	236x70	QR-CBC51 2x50W max.	GU 5.3		



(E) Cubrir toda la longitud del cable de alimentación con los manguitos térmicos

(F) Couvrir toute la longueur du câble d'alimentation avec les manchons thermiques fournis avec l'appareil.

(GB) All the length of input wiring should be covered with the insulating sleeves provided with the light fitting.

(D) Zur eitung sk abel alif seiner ganzen langem iten warmeisolierbuchsen zur auslieferung gelangen. bestucken zusammen mit der leuchte