





The photograph may not match the reference exactly. Please read the product description to identify the finish.

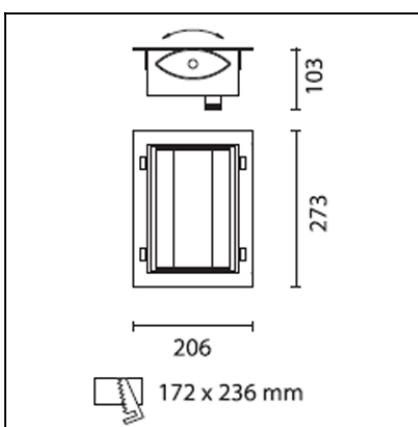

nº 08
QR-CBC51 50W 60°
 $\eta=100\%$



H (m)	Emed (lux)	D (m)
1	591.13	1.15
2	275.00	2.31
3	122.22	3.46
4	68.95	4.62

DESCRIPTION

Recessed luminaire combining downlight and spotlight functions. Body produced in black lacquered steel with aluminium surround finish in grey epoxy paint. Interior body in extruded aluminium can be rotated by 80° horizontally. Reflector produced in shiny anodised aluminium and protected by frosted tempered glass ensuring high visual comfort. Available for linear discharge lamps.

TECHNICAL CHARACTERISTICS

Type:	Downlight
Adjustable ±45° on the horizontal axis.	
IP Protection degrees:	IP20
Lampholder:	1 x Rx7s
Power (W):	Rx7s 150
Voltage / Frequency:	HIT
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.88
EAN:	8435111051214,00



MATERIALS / FINISHES

Structure material: Steel
Aluminium

Diffuser material: Tempered glass




Structure finish: Black lacquered
Grey

Diffuser finish: Sandblasted

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt /.ies

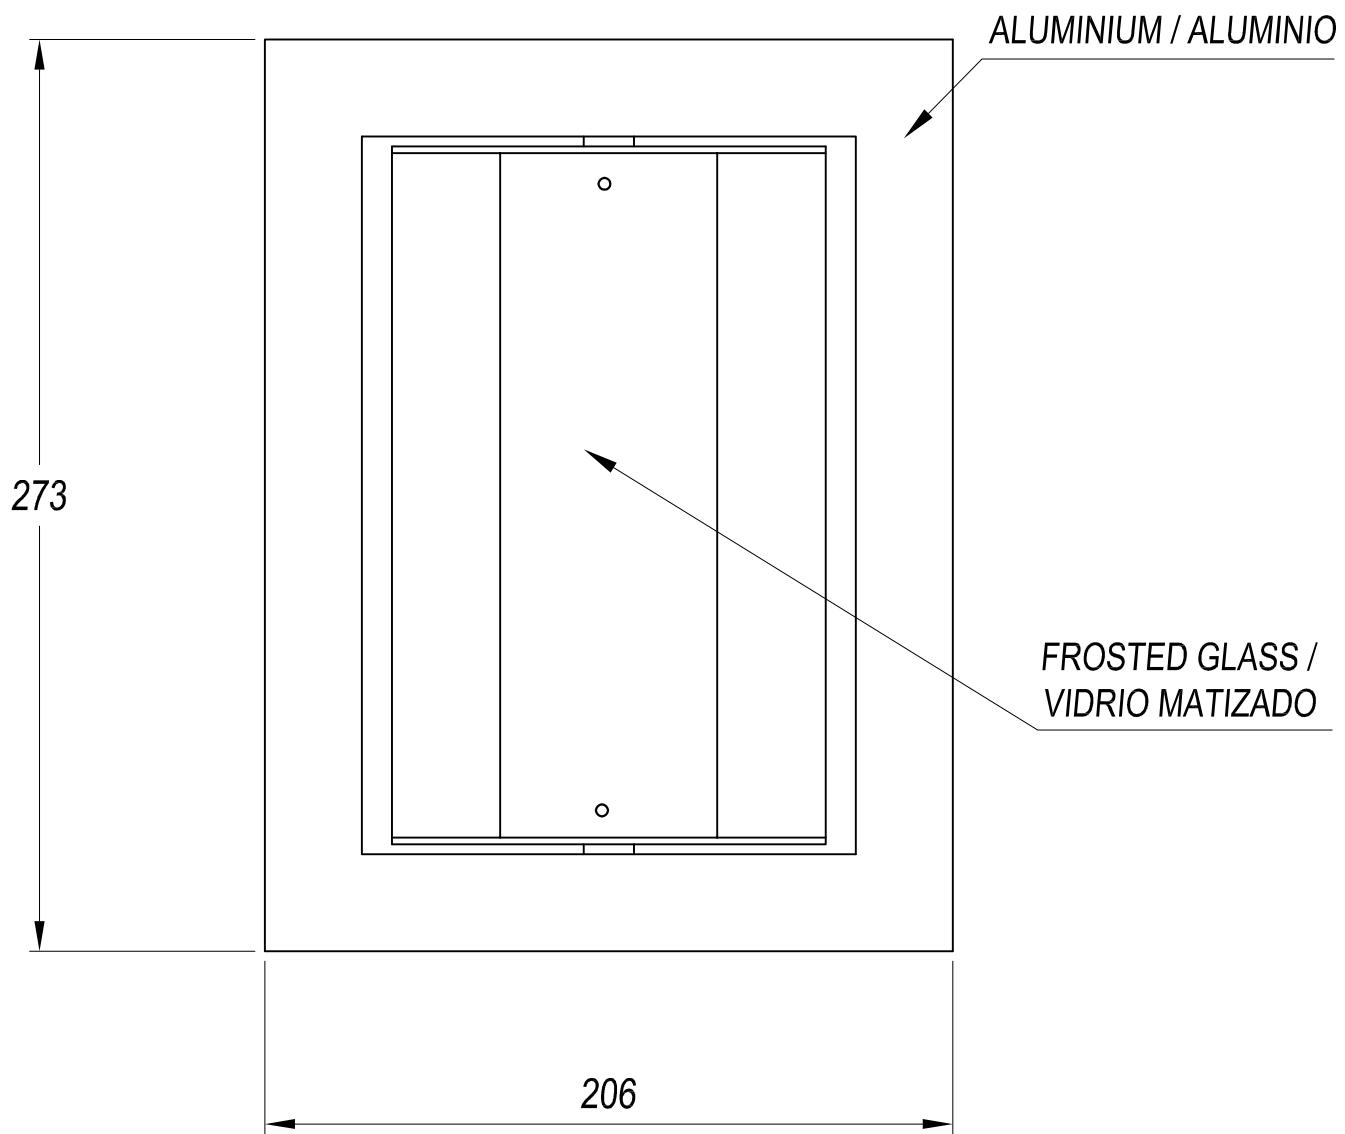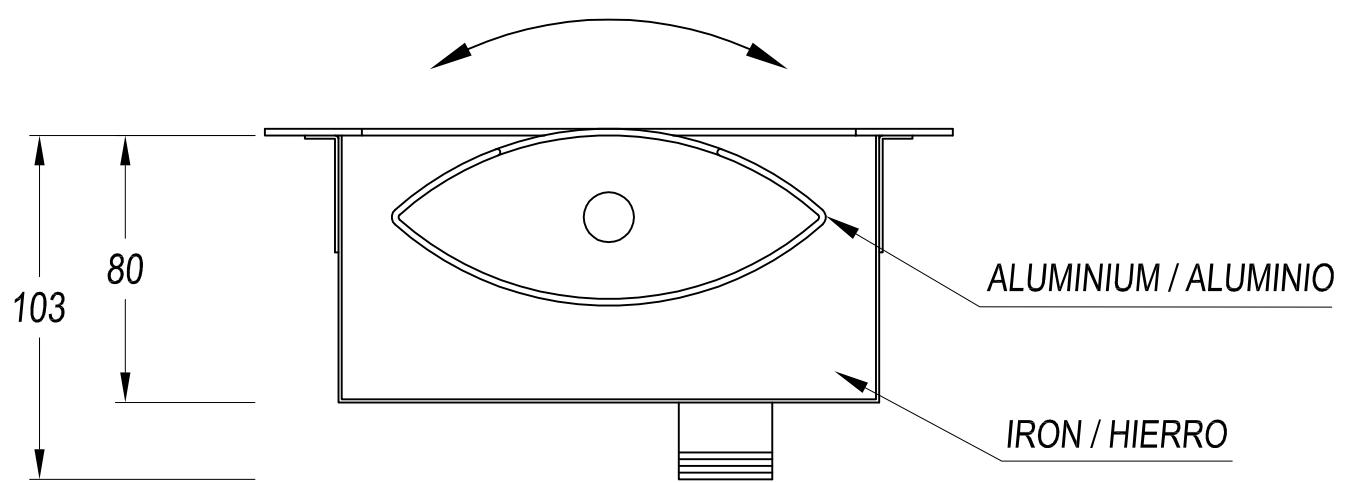

172x236



14-10-09



VITRO

E GB D F

Ref.	L	Lampara	Portalampara
DN-0276-N3-B9	172x236	HIT-DE 1x70w	RX7s
DN-0277-N3-B9	172x236	QT-DE 1x150w	R7S
DN-0750-N3-B9	172x236	HIT-DE 1x150w	RX7s

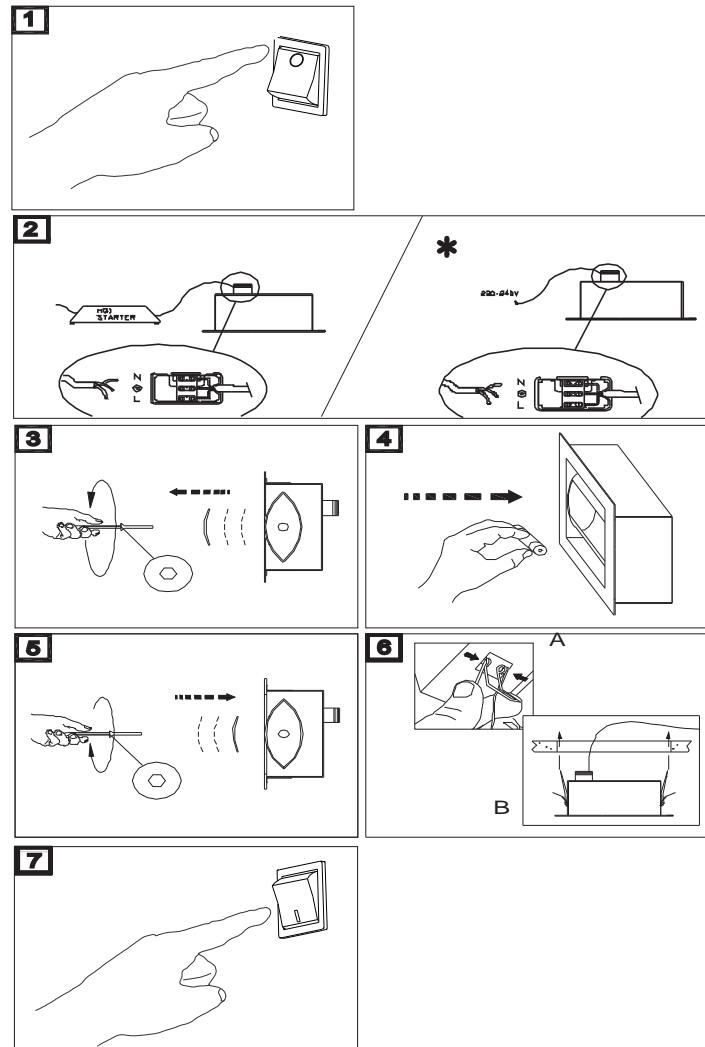

(E) Cubrir toda la longitud del cable de alimentacion con los manguitos termicos

(F) Couvrir toute la longeur du cable d'alimentation avec les manchons thermiques fournis avec l'appareil.

(GB) All the length of input wiring should be covered with the insulating sleeves provided with the light fitting.

(D) Zul eitung sk abel alif seiner ganzen lange mit den warmeisolle rbuchen bestucken zusammen mit der leuchte zur auslieferung gelangen.