




The photograph may not match the reference exactly. Please read the product description to identify the finish.

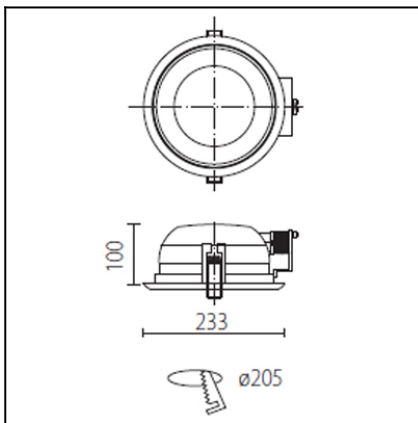

DESCRIPTION

Round downlight for flush mounting ballast included. Painted steel plate casing, anodised aluminium reflector and anti-glare glass diffuser. Finished in white or grey. Suitable for compact fluorescent lights. Spring mounting system.

TECHNICAL CHARACTERISTICS


Type:	Downlight
IP Protection degrees:	IP44
Lampholder:	2 x G24d2
Power (W):	G24d2 18
Voltage / Frequency:	220-240V/50Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.15
EAN:	8435111059630,00



MATERIALS / FINISHES

Structure material:	Injected aluminium	Diffuser material:	Tempered glass
Structure finish:	Baked-on grey paint	Diffuser finish:	Partly-sandblasted

n° 119
DN-1401-14-00 ECO 2x18WTC-D opal
 $\eta=54,75\%$



H (m)	Emed (lux)	D (m)
1	130	3.38
2	33	6.77
3	14	10.15
4	8	13.54
5	5	16.92

GEAR


Gear included: Yes, Magnetic

Download photometric file .ldt / .ies


Luminaria		Ensayo		Lámpara	
Código	DN-1401-14-00	Código	DN-1401-14-00	Código	PLC1884
Nombre	Downlight ECO 2x18W TC-D opal	Nombre	Downlight ECO 2x18W TC-D	Número	2
Familia	- LEDS-C4	Fecha	04-12-2008	Posición	Universal
Eficiencia	54.75%	Sist. de Coorden.	C-G	Flujo Total	2400.00 lm
Valor Máximo	202.72 cd/klm	Posición	C=0.00 G=25.00		Bisimétrico



Diam=225mm Incasso







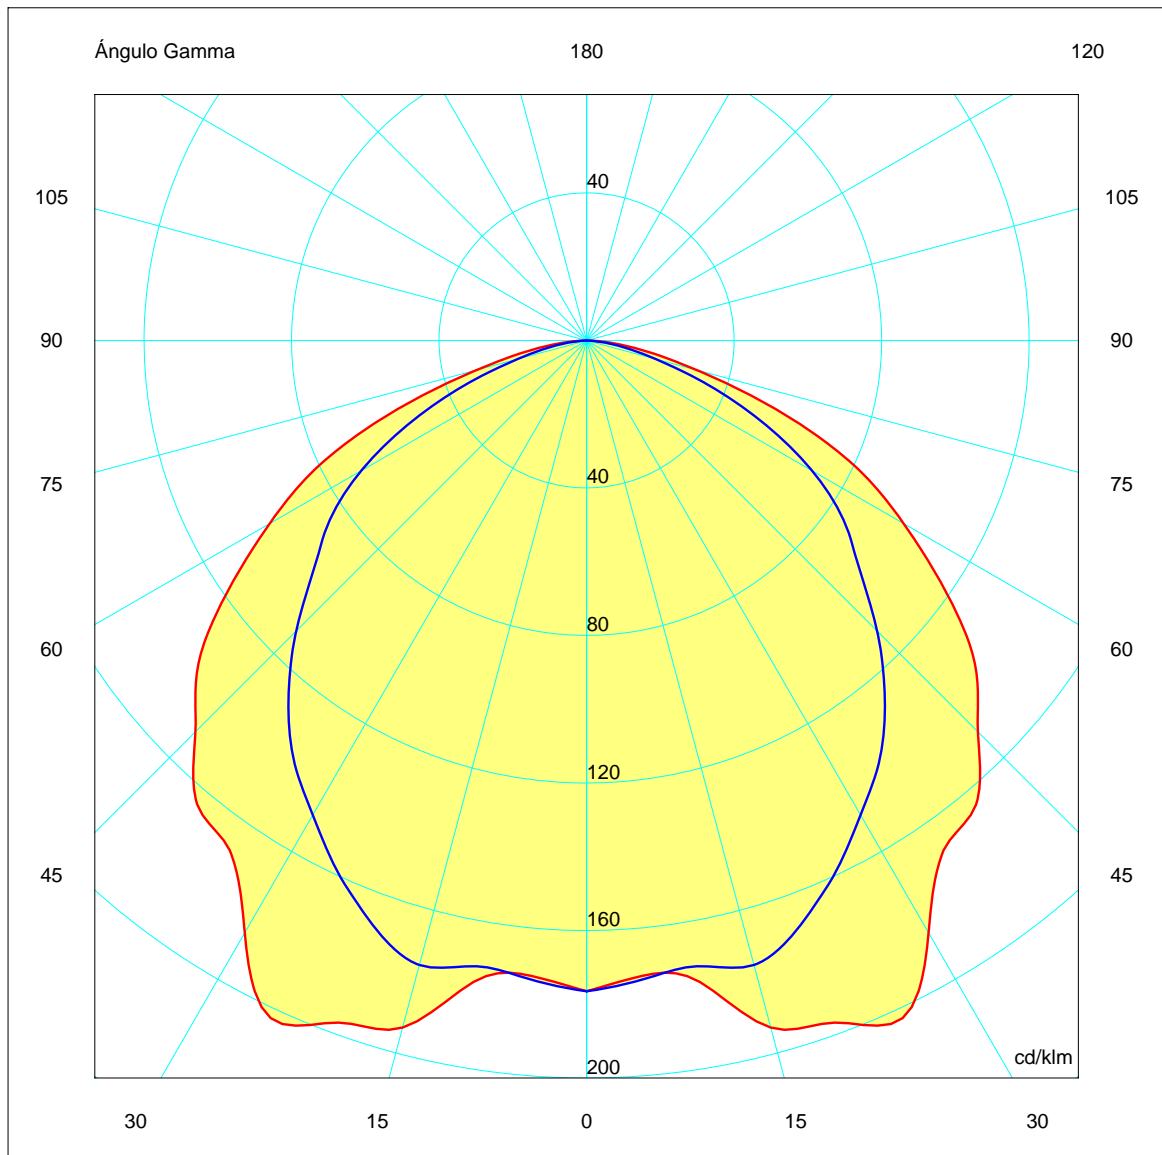

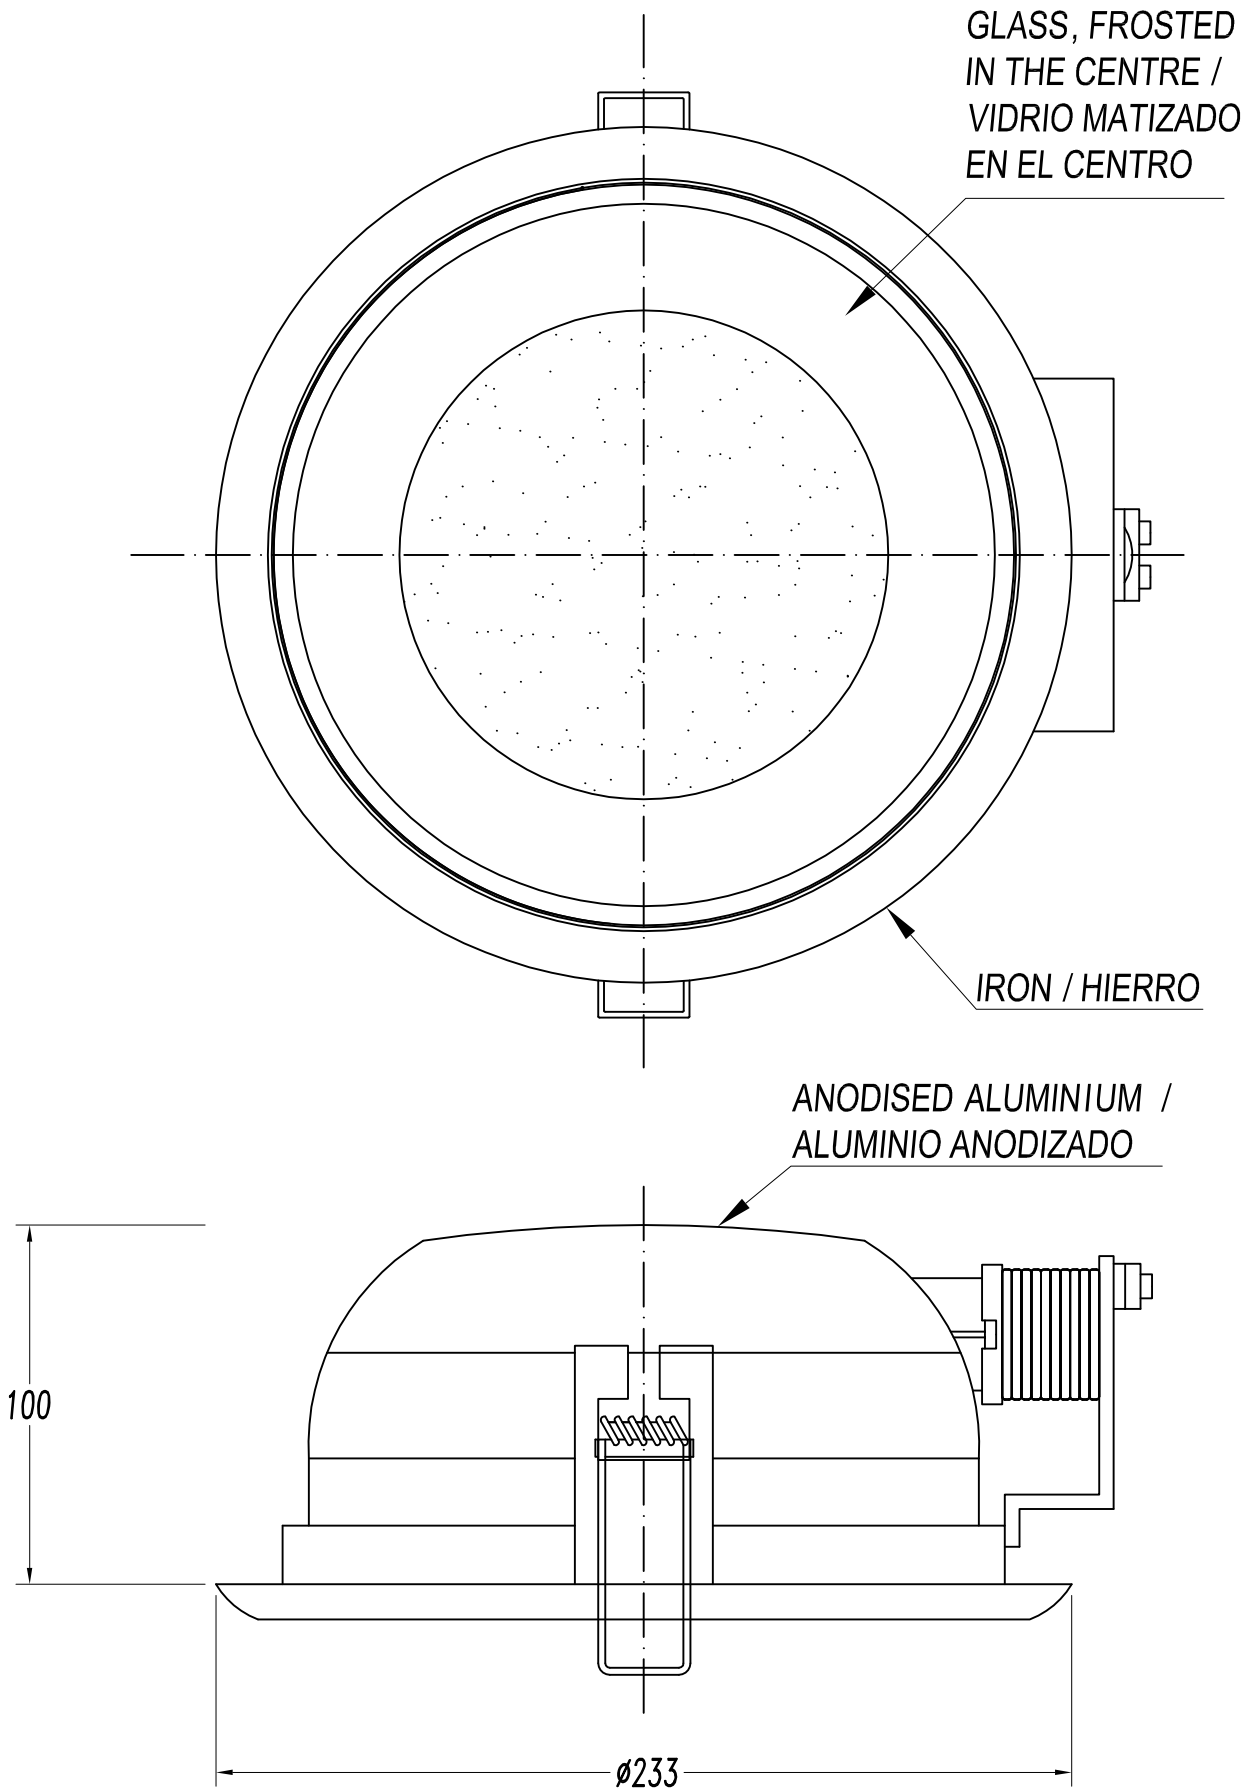


























Semiplanos C



180.0 ——— 0.0
270.0 ——— 90.0





REF.		LAMP	SOCKET			
DN-1400-14-00	∅ 195	TC-D 1x18W	G24d-2		IP44	
DN-1401-14-00	∅ 195	TC-D 2x18W	G24d-2		IP44	
DN-1402-14-00	∅ 195	TC-D 1x26W	G24d-3		IP44	
DN-1403-14-00	∅ 195	TC-D 2x26W	G24d-3		IP44	
DN-1405-14-00	∅ 195	TC-DEL 1x18W	G24q-2		IP44	
DN-1406-14-00	∅ 195	TC-DEL 2x18W	G24q-2		IP44	
DN-1407-14-00	∅ 195	TC-DEL 1x26W	G24q-3		IP44	
DN-1408-14-00	∅ 195	TC-DEL 2x26W	G24q-3		IP44	
DN-1400-N3-00	∅ 195	TC-D 1x18W	G24d-2		IP44	
DN-1401-N3-00	∅ 195	TC-D 2x18W	G24d-2		IP44	
DN-1402-N3-00	∅ 195	TC-D 1x26W	G24d-3		IP44	
DN-1403-N3-00	∅ 195	TC-D 2x26W	G24d-3		IP44	
DN-1405-N3-00	∅ 195	TC-DEL 1x18W	G24q-2		IP44	
DN-1406-N3-00	∅ 195	TC-DEL 2x18W	G24q-2		IP44	
DN-1407-N3-00	∅ 195	TC-DEL 1x26W	G24q-3		IP44	
DN-1408-N3-00	∅ 195	TC-DEL 2x26W	G24q-3		IP44	