




DOME DN-1602-14-00



The photograph may not match the reference exactly. Please read the product description to identify the finish.



QR-111 G53 100W 45° Emed D (m) (lux) (m) 1512.03 0.73 2 378.01 1.46 3 168.00 2.18 4 94.50 2.91 η=100 %

Download photometric file .ldt /.ies

DESCRIPTION

Round downlight for flush mounting with high visual comfort to avoid glare problems. Body produced in stamped steel plate and mounting springs made of hardened stainless steel. Fixed and rotating models tilting up to 40° vertically. Suitable for halogen lamps, discharge lamps and LED lamps. With the option of incorporating colour filters.

TECHNICAL CHARACTERISTICS

Туре:	Downlight
Adjustable ±20° on the horizontal axis.	
IP Protection degrees:	IP23
Lampholder:	1 x G53
Power (W):	G53 100
Total power consumption (W):	100
Voltage / Frequency:	12V/50Hz
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	0.52
EAN:	8435111081006,00



MATERIALS / FINISHES

Structure material: Steel
Structure finish: White


GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.




OPTIONAL ACCESORIES

ACT-9131-11-00




Colour filter for QR111 lamp

Diffuser material: Glass




ACT-9131-08-00




Colour filter for QR111 lamp

Diffuser material: Glass



ACT-9131-25-00




Colour filter for QR111 lamp

Diffuser material: Glass



ACT-9131-24-00




Colour filter for QR111 lamp

Diffuser material: Glass





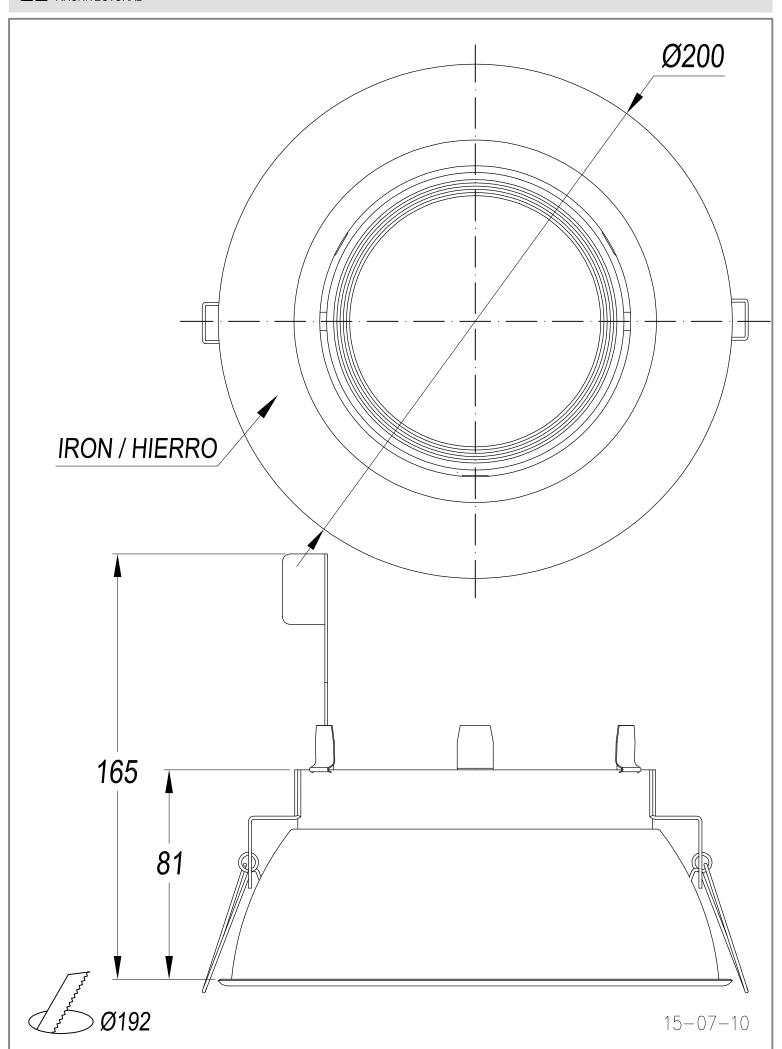



REF.	A	LAMP	SOCKET
DN-1602-14-00	Ø192	QR111 12V Max.100W	G53
DN-1603-14-00	Ø192	CDM - R111 Max.70W	Gx8.5
DN-1651-14-00	Ø192	AR-111 Max.50W	Gu10

